
INCH-POUND
MIL-L-24560/9B(SH)
17 August 1990
SUPERSEDING
MIL-L-24560/9A(SH)
19 October 1981

MILITARY SPECIFICATION SHEET

LIGHTS, NAVIGATION, SIDE, RED AND GREEN, 120 VOLTS, 50 WATTS, ONE LAMP, SYMBOLS 182.2 AND 183.2

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-24560(SH).

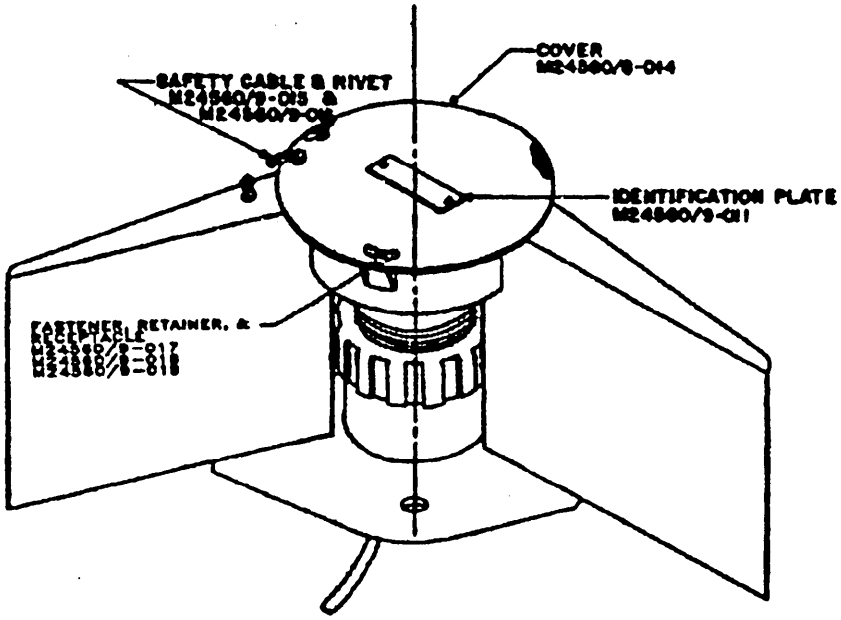

(B)

ASSEMBLY, SIDE LIGHT
M24560/9-001-PORT-SYM. M82.2
M24560/9-002-STBD-SYM. M83.2

SH 11416

FIGURE 1. Side light assembly.


All dimensions are in inches.
For tolerances other than those specified herein, see MIL-L-24560.


(B) denotes changes.

AMSC N/A FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

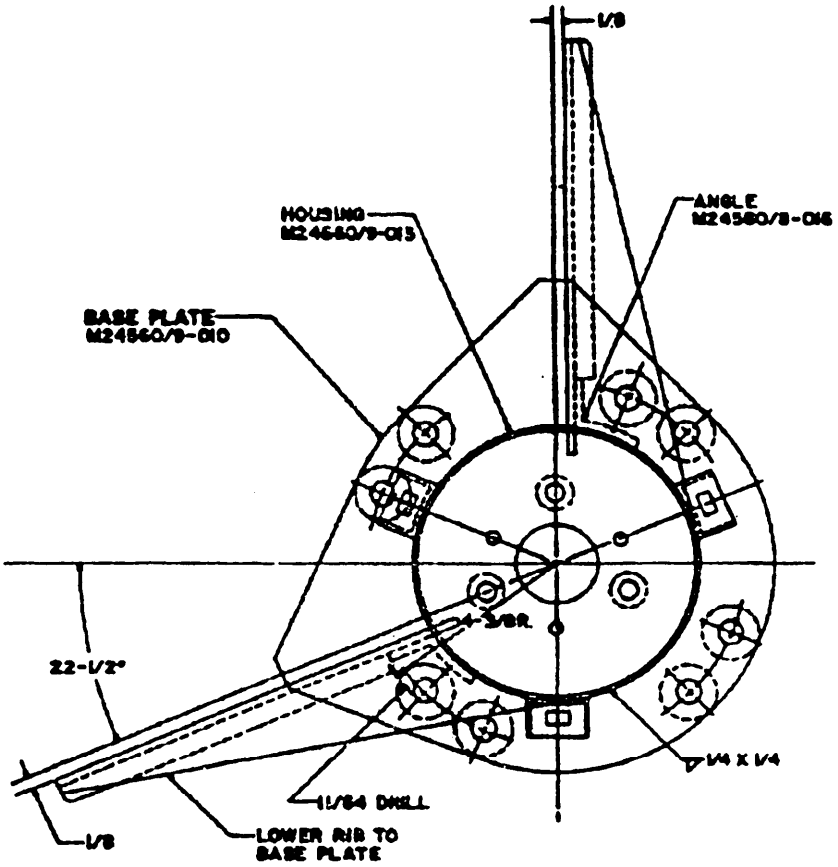

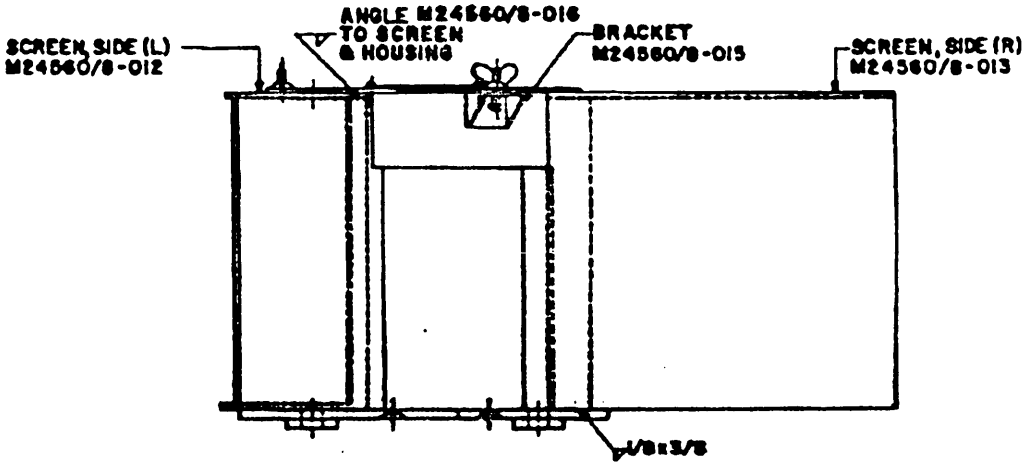



SH 11416-1

FABRICATION DETAILS
M24560/9-005

FIGURE 2. Fabrication details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

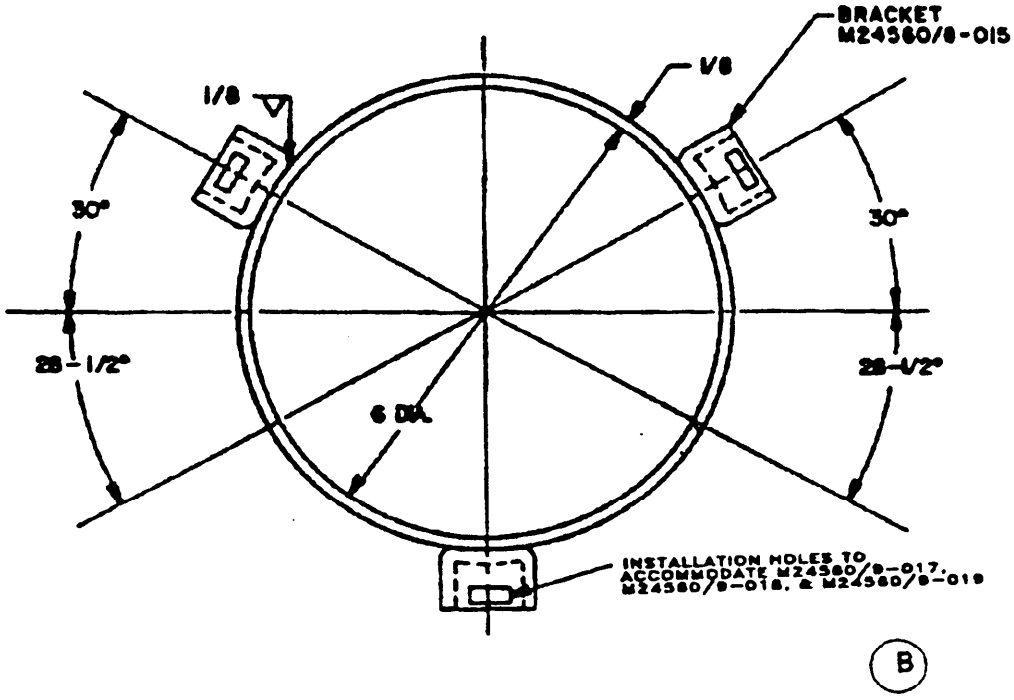

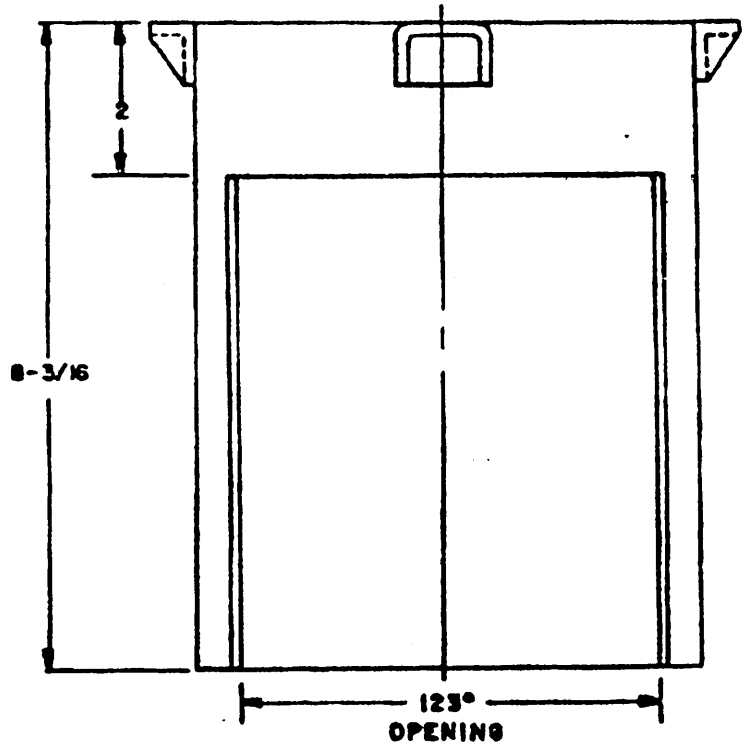


HOUSING
M24560/9-013

SH 11416-2

FIGURE 3. Housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

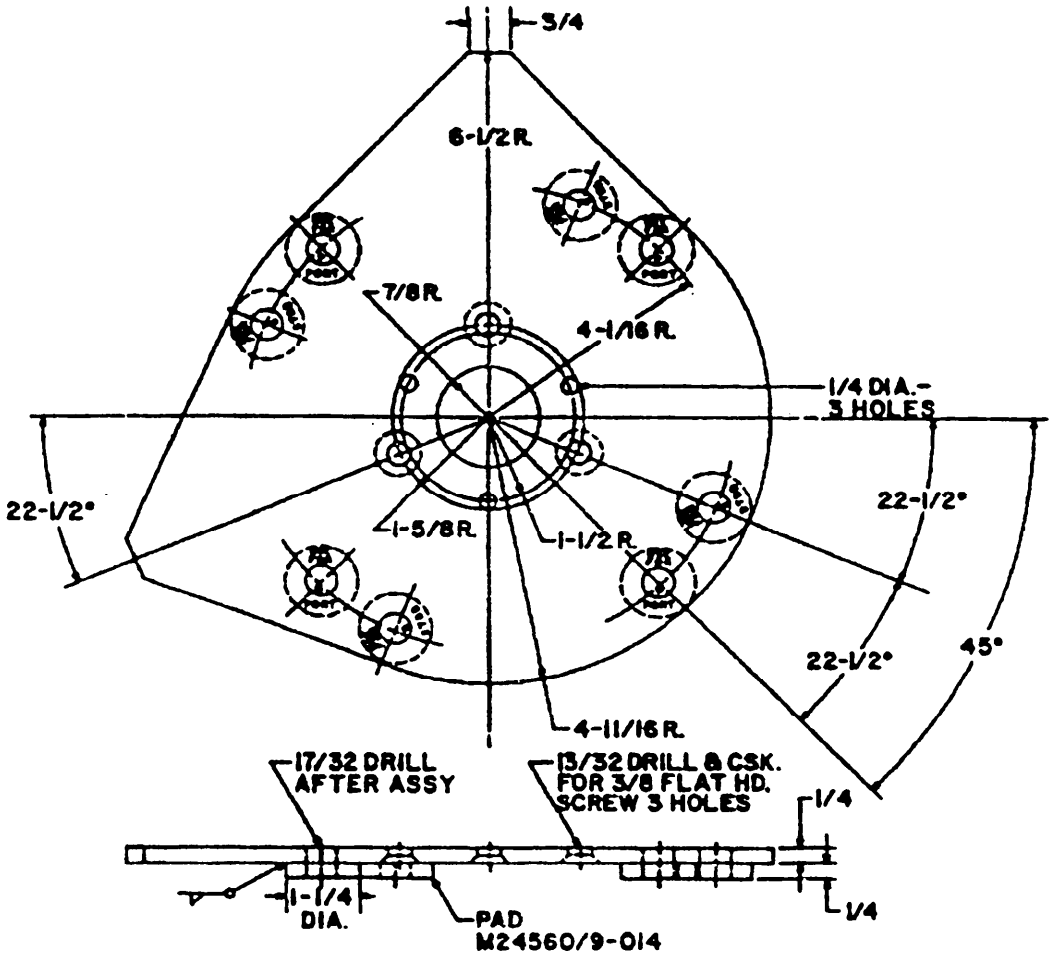

BASE PLATE
M24560/9-010



SE 11416-3

IDENTIFICATION PLATE
M24560/9-011

FIGURE 4. Base plate and identification plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 hertz, 50 watts.
Dimensions and configuration: See figures.
Enclosure: Splashproof (type I).
Parts: See table I.
First article: Examination of product, magnetic permeability, operation, vibration, shock, salt spray.

GENERAL INFORMATION: Military part numbers and general information are as follows:

(a) Military part number: M24560/9-001 - port light assembly, symbol 182.2
M24560/9-002 - starboard light assembly, symbol 183.2
M24560/9-005 - side light shield assembly

(b) Weight: The weight of each light assembly shall be not greater than 18 pounds.

NOTES:

(B) 1. 1/4-turn fastener shall be No. 85 stainless steel wing head with retainer and receptacle, Southco, Inc., Concordville, PA, or equivalent.

(B) 2. Anodize in accordance with MIL-A-8625, type II, class 2. Finish shall be as follows:

(a) Apply two coats epoxy-polyamide primer in accordance with MIL-P-24441/1, type I.
(b) Apply two coats epoxy-polyamide coating in accordance with MIL-P-24441/4, type I. Color shall be lusterless black, FED-STD-595 number 37038.

3. Side light shield assembly M24560/9-005 consists of all parts listed in table I except the light assembly.

Source: https://assist.dla.mil -- Downloaded: 20260-19T22:56Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

	Part number 1/	Part name	Qty.	Specification	Additional information
	M24560/9-010	Base plate	1	COML	AL, 5052-H32
	M24560/8-011	Identification plate	1	MIL-P-15024	AL, type M size 4 normal service of MIL-P-15024
(B)	M24560/9-012	Screw, mach R.H.	3	COML	CRES, 3/8-16 UNC-2A x 5/8 long
	M24560/9-013	Housing	1	COML	AL, 5052-H32
	M24560/9-014	Pad	4	COML	AL, 5052-H32
	M24560/9-015	Rivet	4	COML	AL
	M24560/9-016	Safety cable	1	COML	
	M24560/9-017	Fastener	3	COML	See note 1
(B)	M24560/9-018	Retainer	3	COML	See note 1
(B)	M24560/9-019	Receptacle	3	COML	See note 1
	M24560/8-012	Side screen (left)	1	COML	AL, 5052-H32
	M24560/8-013	Side screen (right)	1	COML	AL, 5052-H32
	M24560/8-014	Cover	1	COML	AL, 5052-H32
	M24560/8-015	Bracket	3	COML	AL, 5052-H32
	M24560/8-016	Angle	2	COML	AL, 5052-H32
	M24560/2-002	Light assembly - red	1	MIL-L-24560/2	For use with symbol 182.2
	M24560/2-003	Light assembly - green	1	MIL-L-24560/2	For use with symbol 183.2

1/ Part numbers M24560/9-010 through M24560/9-019 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N358-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:56Z
Check the source to verify that this is the current version before use.