NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/76C
1 May 1997
SUPERSEDING
MIL-D-3943/76B
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, CONGRESSIONAL SPACE MEDAL OF HONOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

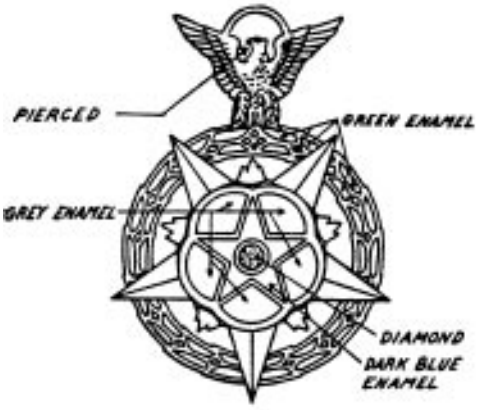

OBVERSE

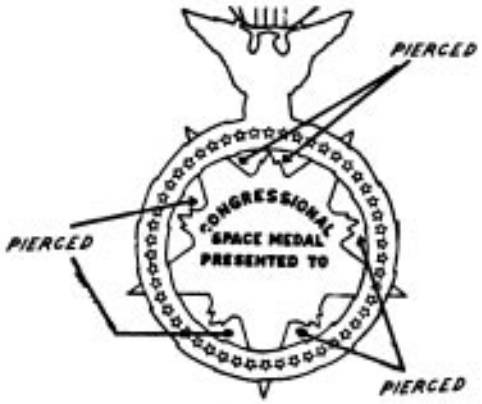

REVERSE

MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:
OBVERSE: Hard Enameled, Gold Plated, Rose Gold Plated, Relieved, Matte Finish.
REVERSE: Gold Plated, Rose Gold Plated, Matte Finish, Polished Highlights on Letters and Stars.

DIMENSIONS:
BASE:
DIAMETER:
-1: 1-7/8 inches (4.76 cm) (REF)
-2: 15/16 inch (2.38 cm) (REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

HEIGHT (Overall):
-1: 2-3/4 inches (6.99 cm) (REF)
-2: 1-3/8 inch (3.49 cm) (REF)
THICKNESS (On Wreath):
-1: 0.090 inch ± 0.010 inch (0.229 cm ± 0.025 cm)
-2: 0.070 inch ± 0.010 inch (0.178 cm ± 0.025 cm)

DEVICE:
DIAMETER (Circumscribed):
-1: 2 inches (5.08 cm) (REF)
-2: 1 inch (2.54 cm) (REF)
THICKNESS (At Center of Device):
-1: 0.175 inch ± 0.010 inch (0.445 cm ± 0.025 cm)
-2: 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The diamond shall be 0.25 carat for Dash No. -1 and 0.03 carat for Dash No. -2.

3. The diamond shall be set in the pendant with a minimum of 4 beads.

4. Enameled areas shall be as indicated. The colors shall conform to TIOH Color Chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Green	11
Blue	20
Gray	34

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. Pierced areas on the base shall be as indicated.

7. The device shall be soft soldered to the base in the location shown.

8. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XI, Style 2 with a Class 1 or 1A pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/180.

10. The lapel button shall conform to MIL-DTL-11484/95.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.

Civil Agency Coordinating Activities:
NASA - NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:20Z
Check the source to verify that this is the current version before use.