NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/79C
1 May 1997
SUPERSEDING
MIL-D-3943/79B
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, REGIONAL AND STATE SCIENCE AND ENGINEERING FAIR AWARDS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

OBVERSE REVERSE

DASH NO.
-1: GOLD
-2: SILVER
-3: BRONZE

MATERIAL: Red Brass

FINISH:
-1: Gold Plated, Rose Gold Plated, Relieved, Matte Finish.
-2: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-3: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:22Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER: 1-5/8 inches (4.13 cm) (REF)
THICKNESS (At Edge): 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pendant ribbon ring shall be fabricated for 0.064 inch (0.163 cm) diameter wire and shall have an inside diameter of 3/8 inch (0.95 cm). The ends shall be square cut and shall be together and in line.

3. The neck ribbon shall be formed by one piece of 1-3/8 inch (3.49 cm) ribbon 31 inches (78.74 cm) long seamed to form a loop. The seam shall be formed as shown below and shall have a 1/2 inch (1.27 cm) turn under at each end. The seam shall be stitched by machine with yellow thread closely matching the yellow of the ribbon. All loose ends of thread shall be trimmed.

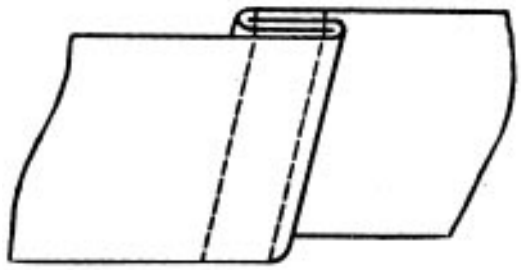

4. A hole 3/16 inch (0.48 cm) in diameter shall be drilled through the lug, perpendicular to the obverse and reverse faces of the pendant. The hole shall be centered in the lug.

5. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Type I, Class 1, 1A or 3 pad.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/197.

7. The lapel button shall conform to MIL-DTL-11484/102.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:22Z
Check the source to verify that this is the current version before use.