NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/79F
7 July 2021
SUPERSEDING
MIL-DTL-3943/79E
14 September 2016

DETAIL SPECIFICATION SHEET

DECORATION, REGIONAL AND STATE SCIENCE AND ENGINEERING FAIR AWARDS, ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE



REVERSE

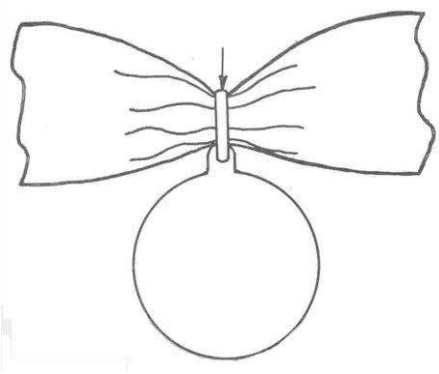

DASH NO.
-1: GOLD
-2: SILVER
-3: BRONZE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: 24KGold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7
.
-2: Nickel Plated, Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14

-3: Oxidized, Buffed Relieved and shall match TIOH Metal Finish Chip Number 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:22Z
Check the source to verify that this is the current version before use.


DIMENSIONS:
DIAMETER: 1-5/8 inches (REF)
THICKNESS (at edge): 0.095 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Type I, Class 1, 1A or 3 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pendant ribbon ring shall be fabricated for 0.064 inch diameter wire and shall have an inside diameter of 3/8 inch. The ends shall be square cut and shall be together and in line.

3. The neck ribbon shall be formed by one piece of 1-3/8 inch ribbon 31 inches long seamed to form a loop. The seam shall be formed as shown below and shall have a 1/2 inch turn under at each end. The seam shall be stitched by machine with yellow thread closely matching the yellow of the ribbon. All loose ends of thread shall be trimmed.

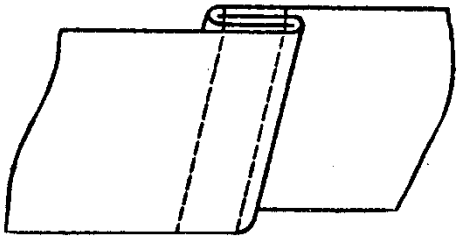

4. A hole 3/16 inch in diameter shall be drilled through the lug, perpendicular to the obverse and reverse faces of the pendant. The hole shall be centered in the lug.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/197.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/102.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-594)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:22Z
Check the source to verify that this is the current version before use.