KKK-F-1964A
MAY 1,1984
SUPERCEDING
KKK-F-1964
APRIL 1, 1977

FEDERAL SPECIFICATION

FIRETRUCK (PUMPER), GASOLINE OR DIESEL ENGINE

(4x2, 4x4, 6x4) 20,000 POUNDS G.V.W. AND OVER)

THIS SPECIFICATION IS APPROVED BY THE GENERAL SERVICES ADMINISTRATION, FOR THE USE OF ALL FEDERAL AGENCIES.

1. SCOPE AND CLASSIFICATION

1.1 SCOPE. THIS SPECIFICATION COVERS GASOLINE AND DIESEL ENGINE DRIVEN, FOUR-WHEEL, TWO REAR WHEEL DRIVE, 4X2, FOUR WHEEL, TWO FRONT AND TWO REAR WHEEL DRIVE 4X4, AND SIX WHEEL, FOUR REAR WHEEL DRIVE 6X4, FIRETRUCKS OF THE TYPE AND CLASS SHOWN IN TABLE I. VEHICLES PROCURED UNDER THIS SPECIFICATION ARE INTENDED FOR USE AS PUMPER.

1.1.1 FEDERAL SPECIFICATION COVERAGE. FEDERAL SPECIFICATIONS DO NOT INCLUDE ALL VARIETIES OF THE COMMODITY AS INDICATED BY THE TITLE OF THE SPECIFICATION, OR WHICH ARE AVAILABLE, BUT ARE INTENDED TO COVER ONLY THOSE GENERALLY USED BY THE FEDERAL GOVERNMENT.

1.2 CLASSIFICATION. FIRETRUCK SHALL BE OF THE TYPE STYLE SHOWN IN TABLE I AS SPECIFIED (SEE 6.1).

TABLE I

TYPE	DESCRIPTION	STYLE 1 2 3
I	CONVENTIONAL CAB	4X2, 4X4, 6X4
II	TILT TYPE CAB	4X2, 4X4, 6X4
III	TILT TYPE CAB-WITH JUMP SEATS	4X2, 4X4, 6X4
IV	CAB FORWARD CUSTOM 5 MEN	4X2, 4X4, 6X4
V	CAB FORWARD CUSTOM 7 MEN	4X2, 4X4, 6X4

2. APPLICABLE DOCUMENTS

2.1 THE FOLLOWING DOCUMENTS, OF THE ISSUES IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSALS, FORM A PART OF THIS SPECIFICATION TO THE EXTENT SPECIFIED HEREIN.

FEDERAL STANDARD:

FED. STD. NO. 595 - COLORS.

(ACTIVITIES OUTSIDE THE FEDERAL GOVERNMENT MAY OBTAIN COPIES OF FEDERAL SPECIFICATIONS, STANDARDS, AND HANDBOOKS AS OUTLINED UNDER GENERAL INFORMATION IN THE INDEX OF FEDERAL SPECIFICATIONS AND STANDARDS AND AT PRICES INDICATED IN THE INDEX. THE INDEX, WHICH INCLUDES CUMULATIVE MONTHLY SUPPLEMENTS AS ISSUED, IS FOR SALE ON A SUBSCRIPTION BASIS BY THE SUPERINTENDENT OF DOCUMENTS, U.S. GOVERNMENT PRINTING OFFICE, WASHINGTON, DC 20402).

(SINGLE COPIES OF THIS SPECIFICATION AND OTHER FEDERAL SPECIFICATIONS REQUIRED BY ACTIVITIES OUTSIDE THE FEDERAL GOVERNMENT FOR BIDDING PURPOSES ARE AVAILABLE WITHOUT CHARGE, FROM BUSINESS SERVICE CENTERS AT THE GENERAL SERVICE ADMINISTRATION REGIONAL OFFICES IN BOSTON, NEW YORK, PHILADELPHIA, WASHINGTON, DC, ATLANTA, CHICAGO, KANSAS CITY, MO, FORT WORTH, HOUSTON, DENVER, SAN FRANCISCO, LOS ANGELES, AND SEATTLE).

(FEDERAL GOVERNMENT ACTIVITIES MAY OBTAIN COPIES OF FEDERAL SPECIFICATIONS, STANDARDS AND HANDBOOKS AND THE INDEX OF FEDERAL SPECIFICATIONS AND STANDARDS FROM ESTABLISHED DISTRIBUTION POINTS IN THEIR AGENCIES).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS:

40 CFR 85 - CONTROL OF AIR POLLUTION FROM NEW MOTOR VEHICLES AND NEW MOTOR VEHICLE ENGINES
40 CFR 205 - EPA TRANSPORTATION EQUIPMENT NOISE EMISSION CONTROL
49 CFR 393.60 GLAZING AND WINDOW CONSTRUCTION
49 CFR 393.65 ALL FUEL SYSTEMS
49 CFR 393.67 LIQUID FUEL TANKS
49 CFR 393.94 - VEHICLE INTERIOR NOISE LEVELS
49 CFR 571. - FEDERAL MOTOR VEHICLE SAFETY STANDARDS

(THE CODE OF FEDERAL REGULATIONS (CFR) AND FEDERAL REGISTER (FR) ARE FOR SALE ON A SUBSCRIPTION BASIS BY THE SUPERINTENDENT OF DOCUMENTS, U.S. GOVERNMENT PRINTING OFFICE, WASHINGTON, DC 20402. WHEN INDICATED, REPRINTS OF CERTAIN REGULATIONS MAY BE OBTAINED FROM THE FEDERAL AGENCY RESPONSIBLE FOR ISSUANCE THEREOF.)

2.2 OTHER PUBLICATIONS. THE FOLLOWING DOCUMENTS FORM A PART OF THIS SPECIFICATION TO THE EXTENT SPECIFIED HEREIN. UNLESS A SPECIFIC ISSUE IS IDENTIFIED, THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL SHALL APPLY.

STATE OF CALIFORNIA, VEHICLE EMISSIONS STANDARDS:

(APPLICATION FOR COPIES SHOULD BE ADDRESSED TO THE CALIFORNIA AIR RESOURCE BOARD, 1709 24TH STREET, SACRAMENTO, CALIFORNIA 95809.)

TIRE AND RIM ASSOCIATION YEARBOOK:

(COPIES MAY BE OBTAINED FROM THE TIRE AND RIM ASSOCIATION, INC., 3200 WEST MARKET STREET, AKRON, OHIO 44313.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE), INC., STANDARDS AND RECOMMENDED PRACTICES:
J-163 - LOW TENSION WIRING AND CABLE TERMINAL AND SPLICE CLIPS
J-245 - ENGINE RATING CODE, SPARK IGNITION
J-551 - MEASUREMENT OF ELECTROMAGNETIC RADIATION FROM MOTOR VEHICLES (20-1000MHZ)
J-552 - EXTERNAL ELECTROMAGNETIC RADIATION SUPPRESSORS
J-553 - CIRCUIT BREAKERS
J-561 - ELECTRICAL TERMINALS
J-683 - TIRE CHAIN CLEARANCE
J-704 - SIDE OPENINGS FOR TRUCK POWER TAKE-OFF
J-816 - ENGINE TEST CODE, SPARK IGNITION AND DIESEL
J-928 - ELECTRICAL TERMINALS
J-992B - BRAKE SYSTEM PERFORMANCE REQUIREMENTS
J-1128 - LOW TENSION PRIMARY CABLE.

(COPIES MAY BE OBTAINED FROM THE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., 400 COMMONWEALTH DRIVE, WARRENDALE, PENNSYLVANIA 15096.)

NATIONAL FIRE PROTECTION ASSOCIATION STANDARD:

NO. 1901 - AUTOMOTIVE FIRE APPARATUS

(APPLICATION FOR COPIES SHOULD BE ADDRESSED TO THE NATIONAL FIRE PROTECTION ASSOCIATION, 470 ATLANTIC AVENUE, BOSTON, MASSACHUSETTS 02210)

TECHNICAL SOCIETY AND TECHNICAL ASSOCIATION SPECIFICATIONS AND STANDARDS ARE GENERALLY AVAILABLE FOR REFERENCE FROM LIBRARIES. THEY ARE ALSO DISTRIBUTED AMONG TECHNICAL GROUPS AND USING FEDERAL AGENCIES.

3. REQUIREMENTS

3.1 DESIGN. THE FIRE APPARATUS FURNISHED UNDER THIS SPECIFICATION SHALL BE BASICALLY THE MANUFACTURER'S CURRENT DESIGN FOR THE TYPE SPECIFIED. THE VEHICLE AND ALLIED EQUIPMENT SPECIFIED SHALL BE COMPLETE WITH ALL NECESSARY OPERATING ACCESSORIES CUSTOMARILY FURNISHED TOGETHER WITH SUCH MODIFICATIONS AND ATTACHMENTS AS MAY BE NECESSARY TO ENABLE THE VEHICLE TO FUNCTION RELIABLY AND EFFICIENTLY IN SUSTAINED OPERATION. THE DESIGN OF THE VEHICLE AND OPTIONAL EQUIPMENT SHALL PERMIT READY ACCESSIBILITY FOR SERVICING, REPLACEMENT, AND ADJUSTMENT OF COMPONENT PARTS AND ACCESSORIES WITH MINIMUM DISTURBANCE OF OTHER COMPONENTS AND SYSTEMS. THE TOTAL WEIGHT OF THE FINISHED PRODUCT INCLUDING BODY,

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

EQUIPMENT, ACCESSORIES, DRIVER, AND PAYLOAD SHALL NOT EXCEED THE CHASSIS MANUFACTURER'S GROSS VEHICLE WEIGHT RATING (G.V.W.R.) FOR THE CHASSIS FURNISHED. THE APPARATUS SHALL BE CONSTRUCTED WITH DUE CONSIDERATION TO THE NATURE AND DISTRIBUTION OF THE LOAD TO BE SUSTAINED, AND TO THE SERVICE TO WHICH THE APPARATUS IS TO BE SUBJECTED WHEN PLACED IN SERVICE. ALL DESIGN, OPERATIONAL AND MATERIAL FEATURES MUST FULLY COMPLY WITH APPLICABLE STANDARDS AS STATED IN 40 CFR 85, 40 CFR 205, AND 49 CFR 571, INCLUDING ADDITIONAL PERTINENT ACTS, AMENDMENTS, AND STANDARDS IN EFFECT AT TIME OF BIDDING, WHETHER OR NOT SPECIFICALLY REFERENCED HEREIN.

THE VEHICLE AND EQUIPMENT SHALL ALSO COMPLY WITH THE CURRENT, AT TIME OF BIDDING, STANDARD NO. 1901 OF NATIONAL FIRE PROTECTION ASSOCIATION, COVERING AUTOMOTIVE FIRE APPARATUS.

3.2 MATERIALS. THE MATERIALS SHALL BE NEW WITH QUALITY CONFORMING TO THE BEST CURRENT ENGINEERING AND MANUFACTURING PRACTICES. MATERIALS SHALL BE FREE OF DEFECTS, SUITABLE FOR THE INTENDED SERVICE. VIRGIN MATERIALS ARE NOT REQUIRED AND RECOVERED MATERIALS ARE NOT EXCLUDED IN MANUFACTURING.

3.3 VEHICLE EQUIPMENT AND ACCESSORIES. THE VEHICLE COMPONENTS, ASSEMBLIES, AND ACCESSORIES TO BE DELIVERED UNDER THE CONTRACT SHALL BE NEW AND SHALL MEET OR EXCEED THE REQUIREMENTS OF THIS SPECIFICATION. THEY SHALL COMPLY WITH ALL ENVIRONMENTAL PROTECTION AGENCY REGULATIONS, FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND FEDERAL MOTOR CARRIER SAFETY REGULATIONS APPLICABLE TO THE SPECIFIED VEHICLE ON THE DATE OF MANUFACTURE. ALL CHASSIS ITEMS SHALL BE AS REPRESENTED IN THE CHASSIS MANUFACTURER'S CURRENT TECHNICAL DATA, AND SPECIAL BODIES OR MOUNTED EQUIPMENT SHALL BE AS REPRESENTED IN THE BODY AND EQUIPMENT MANUFACTURER'S CURRENT TECHNICAL DATA. TECHNICAL DATA SHALL BE LIMITED TO SPECIFICATIONS AND TECHNICAL MATERIAL, IDENTICAL TO THAT FURNISHED TO THE AUTHORIZED COMPANY REPRESENTATIVES FOR SELECTION OF VEHICLE MODELS AND COMPONENTS, OR ON FILE BY THE COMPANY AS BEING ENGINEERED FOR THE PARTICULAR APPLICATION, PRIOR TO AWARD OF CONTRACT FOR A VEHICLE. THE COMPONENT PARTS OF THE VEHICLE NEED NOT BE THE PRODUCTS OF THE SAME MANUFACTURER.

3.3.1 SPECIAL EQUIPMENT. IN ADDITION TO THE STANDARD VEHICLE AND COMPONENTS REQUIRED HEREIN, EACH VEHICLE SHALL BE FURNISHED WHEN REQUIRED BY THE SOLICITATION, OFFER, OR CONTRACT, WITH SPECIAL EQUIPMENT AS SPECIFIED THEREIN.

3.4 VEHICLE LUBRICATION. THE VEHICLE, CHASSIS COMPONENTS, AND EQUIPMENT SHALL BE FULLY EQUIPPED WITH ACCESSIBLE LUBRICATION FITTINGS IN ACCORDANCE WITH THE MANUFACTURER'S STANDARD PRACTICE.

3.5 VEHICLE WEIGHT, RATING AND DIMENSION.

3.5.1 CURB WEIGHT. CURB WEIGHT SHALL INCLUDE WEIGHT OF CHASSIS AND CAB WITH ALL CHASSIS ATTACHMENTS, ACCESSORIES, EQUIPMENT, BOOSTER TANK, AND BODY, INCLUDING A FULL COMPLEMENT OF FUEL, LUBRICANT, AND COOLANT.

3.5.1.1 GROSS VEHICLE WEIGHT. GROSS VEHICLE WEIGHT RATING, (G.V.W.R.) SHALL BE SPECIFIED (SEE 6.1).

3.5.2 RATINGS. COMPONENT AND VEHICULAR RATINGS, AS PUBLISHED IN THE MANUFACTURER'S CURRENT TECHNICAL DATA, SHALL NOT BE RAISED TO MEET THE REQUIREMENTS OF THIS SPECIFICATION. MANUFACTURERS SHALL PROVIDE A G.V.W.R. PLATE SHOWING ACTUAL G.V.W.R. OF THE VEHICLE FURNISHED.

3.5.3 DIMENSIONS. CAB TO AXLE (CA) DIMENSION SHALL BE SPECIFIED WHEN DIMENSION IS REQUIRED FOR TYPE AND SIZE OF VEHICLE ORDERED. THE GROSS VEHICLE WEIGHT OF THE TRUCK SHALL BE DISTRIBUTED WITH THE FOLLOWING MINIMUM ON THE FRONT AXLE AND SHALL NOT EXCEED THE AXLE CAPACITY.

TRUCK	PERCENT
FIVE AND SEVEN MAN CAB FORWARD (CUSTOM) 4X2, 4X4	35
CONVENTIONAL CAB - 4X2	30
TILT CAB - 4X2	30
ANY TYPE CAB - 6X4	30

THE VEHICLE FURNISHED SHALL HAVE THE SHORTEST CA DIMENSION AVAILABLE THAT IS ADEQUATE FOR INTENDED BODY AND PROVIDES PROPER WEIGHT DISTRIBUTION. MAXIMUM OVERALL WIDTH SHALL NOT EXCEED 96 INCHES UNLESS SPECIFICALLY WAIVED.

3.5.3.1 UNLESS OTHERWISE SPECIFIED OR REQUIRED BY STATED CA DIMENSION (SEE 6.1), WHEEL BASE SHALL BE MANUFACTURER'S STANDARD TYPE OF VEHICLE OFFERED.

3.6 FRAME. THE FRAME SHALL BE CAPABLE OF WITHSTANDING THE STRAIN OF RIGOROUS SERVICE AND SHALL BE PROVIDED WITH ADEQUATE CROSSMEMBERS SO DESIGNED AND CONSTRUCTED TO SUPPORT THE GROSS WEIGHT OF THE VEHICLE WITH ITS LOAD, PERSONNEL, POWER PLANT AND ALL SPECIFIED EQUIPMENT. THE FRAME, AS SUPPLIED BY THE CHASSIS MANUFACTURER TO THE FIRE APPARATUS BUILDER SHALL NOT BE ALTERED, EITHER TO BE INCREASED OR DECREASED IN LENGTH OTHER THAN TO REMOVE EXCESS LENGTH OF FRAME, RAILS BEHIND THE REAR SPRING HANGERS, WHICH WILL NOT AFFECT THE ORIGINAL WHEEL BASE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

3.6.1 FRAME REINFORCEMENT. WHEN FIRE TRUCKS ARE TO BE EQUIPPED WITH AN AERIAL LADDER, ELEVATED PLATFORM, SNORKEL UNITS, OR WHEN MINIMUM RESISTING BENDING MOMENTS ARE SPECIFIED (SEE 6.1), THE FRAME DESIGN AND MATERIAL SHALL BE CAPABLE OF WITHSTANDING THE MAXIMUM STRESS IMPOSED UNDER EXTREME CONDITIONS. THIS MAY BE ACCOMPLISHED BY INCREASING RESISTANCE TO BENDING MOMENT THROUGH REINFORCEMENT OF FRAME CHANNELS, USE OF DEEPER SECTION TO PROVIDE INCREASED SECTION MODULUS, OR USE OF HIGHER TENSILE STRENGTH STEEL FRAME RAILS.

3.7 POWER UNIT, GASOLINE OR DIESEL.

3.7.1 POWER UNIT. POWER UNIT FURNISHED FOR THE SPECIFIED VEHICLE SHALL BE THE CHASSIS MANUFACTURER'S STANDARD OR, OPTIONAL, COMMERCIALLY AVAILABLE ENGINE FOR THE MODEL TRUCK WHICH MEETS OR EXCEEDS THE REQUIRED VEHICLE PERFORMANCE SPECIFIED HEREIN (SEE 3.8), AT NOT MORE THAN ENGINE MANUFACTURER'S RECOMMENDED GOVERNED ENGINE SPEED. IT SHALL BE OF SUCH DESIGN AND CONSTRUCTION THAT IT WILL GIVE AN EVEN FLOW OF POWER AT ALL R.P.M. WITHOUT UNDUE VIBRATION, STRAIN, OR OVERHEATING OF ENGINE PARTS.

3.7.1.1 ENGINE STARTING. UNLESS OTHERWISE SPECIFIED IN 3.21.2, ENGINE, GASOLINE OR DIESEL, SHALL START SATISFACTORILY WITHOUT DEVICES THAT ARE NOT SELF-CONTAINED ON THE VEHICLE AT TEMPERATURES DOWN TO 0°F. THE VEHICLE MANUFACTURER SHALL INCORPORATE SUFFICIENT BATTERY CAPACITY TO SATISFY THIS REQUIREMENT. AUXILIARY HEATING OR STARTING DEVICES SHALL BE PROVIDED AT THE OPTION OF THE PURCHASER.

3.7.2 GASOLINE ENGINE. WHEN SPECIFIED (SEE 6.1), POWER UNIT SHALL BE LIQUID COOLED, INTERNAL COMBUSTION, FOUR STROKE CYCLE GASOLINE TYPE, EIGHT CYLINDERS AND SHALL CONFORM TO REQUIREMENTS AS SPECIFIED HEREIN. ENGINES FURNISHED SHALL BE RATED IN ACCORDANCE WITH SAE J245.

3.7.3 DIESEL ENGINE. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE ENGINE SHALL BE A LIQUID COOLED, COMPRESSION IGNITION TYPE, WITH AT LEAST SIX CYLINDERS. ENGINE SHALL DEVELOP THE REQUIRED HORSEPOWER AND TORQUE (SEE 3.8), AND OPERATE SMOOTHLY AND EFFICIENTLY. ENGINES FURNISHED SHALL BE RATED IN ACCORDANCE WITH SAE J816.

3.8 PERFORMANCE.

3.8.1 SPEED AND GRADEABILITY. SPEED AND GRADEABILITY TEST AS PER N.F.P.A 1901, CHAPTER 11 SHALL BE PERFORMED WITH THE FOLLOWING EXCEPTIONS:

A. THE MAXIMUM ROAD SPEED (TRUE SPEED) AT ENGINE GOVERNED SPEED SHALL NOT BE LESS THAN 62 M.P.H., AND NOT MORE THAN 68 M.P.H.

B. VEHICLE SHALL BE CAPABLE OF ASCENDING A 2% GRADE AT 55 M.P.H. OR AS SPECIFIED (SEE 6.1).

3.9 GOVERNOR. AN ENGINE GOVERNOR SHALL BE FURNISHED, SET, AND SEALED TO LIMIT THE ENGINE TO THE MANUFACTURER'S MAXIMUM RECOMMENDED OPERATING SPEED.

3.10 OIL FILTER. THE OIL FILTER SHALL BE OF THE FULL-FLOW TYPE THAT IS RECOMMENDED OR APPROVED BY THE ENGINE MANUFACTURER, SO CONSTRUCTED AND MOUNTED THAT NO SPECIAL EQUIPMENT OR SKILL WILL BE REQUIRED IN CHANGING THE FILTERING ELEMENT.

3.11 AIR FILTER. UNLESS OTHERWISE SPECIFIED (SEE 6.1), AIR FILTER SHALL BE ENGINE MANUFACTURER'S STANDARD FOR ENGINE OFFERED.

3.12 EMISSION CONTROLS. VEHICLES AND ENGINES SHALL COMPLY WITH THE REGULATIONS OF THE ENVIRONMENTAL PROTECTION AGENCY GOVERNING CONTROL OF AIR POLLUTION FROM NEW MOTOR VEHICLES AND NEW MOTOR VEHICLE ENGINES IN EFFECT ON THE DATE OF MANUFACTURE.

3.13 FUEL SYSTEM. THE FUEL SYSTEM FURNISHED SHALL CONFORM WITH FEDERAL MOTOR CARRIER SAFETY REGULATIONS 393.65-393.67 AND INCLUDE FUEL TANKS EQUIPPED WITH AN ELECTRICAL FUEL LEVEL SENSING DEVICE WITH GAUGE VISIBLE TO THE SEATED OPERATOR. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE STYLE TANK(S) SHALL BE MANUFACTURER'S STANDARD FOR THE VEHICLE OFFERED. FUEL TANK(S) OF NOT LESS THAN 50 GALLONS TOTAL CAPACITY IS REQUIRED. TRUCK FILLER OPENING SHALL BE SO LOCATED TO PROVIDE READY ACCESS TO FILLER OPENING WHEN USING STANDARD TYPE FUEL DELIVERY NOZZLE, WITHOUT OBSTRUCTION BY ANY PORTION OF MOUNTED BODY OR EQUIPMENT.

3.13.1 FUEL SYSTEM, GASOLINE ENGINE. A CARBURETOR FED BY A MECHANICALLY OR ELECTRICALLY-DRIVEN FUEL PUMP AND PROTECTED BY FUEL FILTER(S) SHALL BE FURNISHED. WHEN DUAL FUEL TANKS ARE FURNISHED, A FUEL TANK SELECTOR VALVE IDENTIFIED TO INDICATE WHICH TANK IS FURNISHING FUEL, SHALL BE INSTALLED. A SELECTIVE SWITCH TO OPERATE FUEL GAUGE READINGS SHALL BE INSTALLED ON THE INSTRUMENT PANEL ADJACENT TO THE FUEL GAUGE. THE SWITCH POSITIONS SHALL BE IDENTIFIED TO INDICATE WHICH TANK READING IS BEING TAKEN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.13.2 FUEL SYSTEM, DIESEL ENGINE. A MECHANICALLY-DRIVEN FUEL PUMP WITH ALL NECESSARY REGULATING AND CONTROLLING ATTACHMENTS; ACCESSIBLE AND READILY REMOVABLE FUEL FILTER(S) AND A WATER/FUEL SEPARATOR/FILTER WITH SEE THRU BOWL AND DRAIN VALVE SHALL BE FURNISHED.

3.14 COOLING SYSTEM. THE COOLING SYSTEM SHALL BE LIQUID PRESSURIZED FORCE CIRCULATION TYPE. IT SHALL CONSIST OF THE NECESSARY COMPONENTS OF SUFFICIENT DESIGN AND CAPACITY TO MAINTAIN THE ENGINE AT THE ENGINE MANUFACTURER'S SPECIFIED OPTIMUM SAFE TEMPERATURE UNDER ALL OPERATING CONDITIONS SPECIFIED HEREIN, WITHOUT ANY LOSS OF COOLANT. OPTIMUM ENGINE TEMPERATURE SHALL BE MAINTAINED WITH THE VEHICLE LOADED TO THE G.V.W.R. AND CONTINUALLY OPERATING AT ALL DRIVEABLE ALTITUDES AND GRADES AND WHILE PUMPING AT MAXIMUM CAPACITY IN AMBIENT TEMPERATURES RANGING FROM -20° TO 125°F. THE COOLING SYSTEM SHALL BE SUITABLE FOR OPERATING WITH PERMANENT TYPE OF ANTI-FREEZE SOLUTIONS AND ITS TEMPERATURE BE THERMOSTATICALLY CONTROLLED.

3.14.1 DRAIN OUTLETS. EASILY ACCESSIBLE DRAIN OUTLETS SHALL BE PROVIDED ON ALL VEHICLES TO ALLOW COMPLETE COOLING SYSTEM DRAINAGE.

3.14.2 SHUTTERS. WHEN SPECIFIED (SEE 6.1), OR WHEN REQUIRED TO ACCOMPLISH CONTROL OF COOLANT AND OPERATING TEMPERATURE, AUTOMATIC THERMOSTAT CONTROLLED SHUTTERS SHALL BE PROVIDED.

3.15 EXHAUST SYSTEM. THE EXHAUST SYSTEM TUBING SHALL BE MANUFACTURER'S HEAVIEST DUTY ALUMINIZED STEEL OR STAINLESS STEEL, OF SUCH SIZE AS RECOMMENDED BY THE ENGINE MANUFACTURER TO AVOID UNDUE INCREASE IN BACK PRESSURE, AND SHALL BE LOCATED IN SUCH A MANNER AND SHALL INCLUDE HEAT SHIELDS OR DEFLECTORS AS NECESSARY TO AVOID UNDUE HEATING OF FUEL SYSTEM COMPONENTS, BATTERIES, WIRING, CHASSIS COMPONENTS, ETC. AND TIRES. TAILPIPE SHALL EXIT ON RIGHT SIDE IN FRONT OF REAR WHEELS, DEFLECTED DOWNWARD.

3.16 POWER TRAIN.

3.16.1 CLUTCH. THE CHASSIS MANUFACTURER'S HEAVIEST DUTY CLUTCH AVAILABLE FOR THE ENGINE AND CHASSIS MODEL OFFERED SHALL BE FURNISHED, WITH TORQUE CAPACITY EXCEEDING MAXIMUM GROSS ENGINE TORQUE.

3.16.2 TRANSMISSION. MANUFACTURER'S SELECTIVE MANUAL OR AUTOMATIC TYPE, TRANSMISSION SHALL BE PROVIDED. INPUT TORQUE CAPACITY OF THE TRANSMISSION SHALL BE AT LEAST EQUAL TO THE MAXIMUM GROSS TORQUE DELIVERED BY THE ENGINE. TRANSMISSION SHALL BE PROVIDED WITH A STANDARD SAE 704 POWER TAKE-OFF (PTO) OPENING AT THE RIGHT OR LEFT SIDE, OR AS SPECIFIED (SEE 6.1).

3.16.2.1 TRANSMISSION, MANUAL. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A MANUAL TYPE TRANSMISSION SHALL BE FURNISHED AND SHALL HAVE THE NUMBER OF SPEEDS AND RATIOS AS RECOMMENDED BY THE CHASSIS MANUFACTURER FOR THE REQUIRED PERFORMANCE.

3.16.2.2 TRANSMISSION, AUTOMATIC. WHEN SPECIFIED (SEE 6.1), THE VEHICLE SHALL BE PROVIDED WITH AUTOMATIC OR SEMIAUTOMATIC TRANSMISSION. THE TRANSMISSION SHALL INCLUDE A HYDRAULIC TORQUE CONVERTER WITH FOUR FORWARD GEAR RATIOS. NORMAL DRIVING RANGE SELECTOR POSITION SHALL BE PROVIDED WITH FOUR GEAR RATIOS WITHOUT MOVEMENT OF THE SELECTOR. THE TRANSMISSION SHALL BE PROVIDED WITH 4TH GEAR LOCK-UP, AND FRAME MOUNTED REPLACEABLE SPIN-ON FILTER, AND DASH MOUNTED OIL TEMPERATURE GAUGE.

3.16.2.3 TRANSFER CASE, 4X4). WHEN A 4X4 IS SPECIFIED (SEE 6.1), A PART-TIME, FOUR-WHEEL DRIVE SYSTEM SHALL BE PROVIDED. THE SYSTEM SHALL HAVE A 2 SPEED TRANSFER CASE. A SHIFT PATTERN LOCATED ON THE SHIFT KNOB OR DECAL WITHIN THE CAB SHALL BE PROVIDED. WHEN SPECIFIED (SEE 6.1) A POWER DIVIDER TYPE AXLE SHALL BE PROVIDED WITH NOT LESS THAN A 14° BREAKOVER ANGLE.

DRIVE HUBS, FRONT WHEELS, (4X4). WHEN SPECIFIED (SEE 6.1), MANUAL FRONT WHEEL LOCKING HUB TO DISENGAGE THE FRONT WHEELS FROM THE POWERTRAIN SHALL BE PROVIDED (9,000 POUND AXLE AND UNDER).

3.16.3 DRIVE LINE COMPONENTS. THE DRIVE LINE COMPONENTS SHALL BE OF SUFFICIENT CAPACITY AND DESIGN TO TRANSMIT THE MAXIMUM TORQUE OF THE ENGINE DEVELOPED THROUGH THE LOWEST INTERVENING GEAR REDUCTION.

3.16.4 AXLES. VEHICLES SHALL BE EQUIPPED WITH THE MANUFACTURER'S STANDARD OR OPTIONAL FRONT AND REAR AXLES. THE AXLE CAPACITY RATINGS SHALL BE AT LEAST EQUAL TO THE GROSS LOAD IMPOSED AT THE GROUND WHEN THE VEHICLE IS EVENLY LOADED TO ITS RATED G.V.W.R. THE REAR AXLE TORQUE INPUT CAPACITY SHALL BE AT LEAST EQUAL TO THE TOTAL ENGINE TORQUE DEVELOPED THROUGH THE LOWEST INTERVENING GEAR REDUCTIONS. GEAR RATIOS SHALL PROVIDE A MINIMUM PERFORMANCE AS SPECIFIED IN 3.8. OPTIONAL CAPACITY AXLES MAY BE SPECIFIED (SEE 6.1).

3.16.4.1 TWO-SPEED REAR AXLES. WHEN SPECIFIED (SEE 6.1), OR WHEN REQUIRED IN COMBINATION WITH THE TRANSMISSION TO PROVIDE THE REQUIRED PERFORMANCE, MULTI-SPEED AXLES SHALL BE FURNISHED AND EQUIPPED WITH ELECTRIC OR AIR SHIFT, OPERABLE FROM THE DRIVER'S POSITION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.16.4.2 TANDEM REAR AXLES. WHEN A 6X4 IS SPECIFIED (SEE 6.1), TANDEM REAR AXLES SHALL BE FURNISHED. BOTH AXLES SHALL BE LIVE AND PROVIDED WITH POWER DIVIDER INCLUDING INTER-AXLE DIFFERENTIAL WITH LOCK-OUT CONTROL OR AUTOMATIC LOCKING INTER-AXLE DIFFERENTIAL. A WARNING LIGHT MOUNTED IN THE CAB SHALL BE PROVIDED WHEN A MANUAL LOCK-OUT CONTROL IS FURNISHED. BOGIE DESIGN SHALL BE SUCH AS TO PERMIT A DIFFERENCE IN VERTICAL MOVEMENT BETWEEN THE TWO AXLES OF NOT LESS THAN 8 INCHES. THE TORQUE REACTION FROM EACH DRIVE-AXLE HOUSING SHALL BE TRANSMITTED DIRECTLY TO THE FRAME.

3.16.5 DIFFERENTIAL(S), FRONT AND REAR. WHEN SPECIFIED (SEE 6.1), DIFFERENTIAL(S) SHALL BE SPECIAL TRACTION TYPE.

3.17 SUSPENSION. VEHICLE SHALL BE EQUIPPED WITH A SUSPENSION SYSTEM OF ADEQUATE STRENGTH TO SUSTAIN THE G.V.W.R. IMPOSED BY THE EVENLY AND FULLY LOADED VEHICLE WITHOUT EVIDENCE OF OVERLOAD OR PERMANENT SET. IF LEAF SPRING SUSPENSION IS EMPLOYED, AUXILIARY REAR SPRINGS SHALL BE PROVIDED (EXCEPT 6X4'S).

3.17.1 SPRING STOPS. THE MANUFACTURER'S STANDARD SPRING OR AXLE STOPS SHALL BE PROVIDED. THE FRONT SPRING STOPS SHALL PREVENT THE AXLES FROM STRIKING THE ENGINE OIL PAN, PIPING OR OTHER COMPONENTS UNDER ALL CONDITIONS OF OPERATION.

3.17.2 SHOCK ABSORBERS. HEAVIEST-DUTY HYDRAULIC, DOUBLE-ACTING, SHOCK ABSORBERS AVAILABLE FOR CHASSIS MODEL AND AXLE OFFERED SHALL BE FURNISHED ON ALL FRONT AXLES.

3.18 WHEELS, RIMS, TIRES, AND TUBES.

3.18.1 WHEELS AND RIMS. UNLESS OTHERWISE SPECIFIED (SEE 6.1), VEHICLES SHALL BE EQUIPPED WITH SINGLE FRONT AND DUAL REAR WHEELS. WHEELS AND RIMS SHALL BE THE MANUFACTURER'S RECOMMENDED SIZE AND CAPACITY FOR THE GROSS AXLE WEIGHT RATINGS. RIM CONTOURS AND SIZES SHALL CONFORM TO THE CURRENT RECOMMENDATIONS OF THE TIRE AND RIM ASSOCIATION, INC.

3.18.2 TIRES. UNLESS OTHERWISE SPECIFIED (SEE 6.1), ALL TIRES FURNISHED INCLUDING THE SPARE (SEE 3.18.4), SHALL BE TRUCK TYPE, TUBE OR TUBELESS, WITH STANDARD HIGHWAY TREAD DESIGN ON FRONT AND NON-MILITARY (CROSSBAR AT RIGHT ANGLE TO CENTER LINE OF TREAD NOT PERMITTED), MUD AND SNOW TYPE ON REAR. EACH TIRE SHALL HAVE A LOAD CARRYING CAPACITY AT LEAST EQUAL TO THE MAXIMUM LOAD IMPOSED UPON IT BY THE EVENLY AND FULLY LOADED VEHICLE. TIRES SHALL BE THE CHASSIS MANUFACTURER'S RECOMMENDED SIZE AND LOAD RANGE FOR THE GROSS AXLE WEIGHT RATINGS. STEEL-BELTED RADIAL PLY TIRES SHALL BE FURNISHED WHEN SPECIFIED (SEE 6.1).

3.18.3 INNER TUBES. WHEN TUBE TYPE TIRES ARE FURNISHED, THE INNER TUBES SHALL BE OF THE TYPE FOR THE TIRES FURNISHED IN ACCORDANCE WITH RECOMMENDATIONS OF THE TIRE AND RIM ASSOCIATION, INC.

3.18.4 SPARE WHEEL AND TIRE. WHEN SPECIFIED (SEE 6.1), ONE INFLATED SPARE WHEEL OR RIM, TIRE AND TUBE (IF APPLICABLE), SHALL BE FURNISHED WITH EACH VEHICLE. SIZE AND TREAD SHALL MATCH THAT PROVIDED ON FRONT OF TRUCK.

3.18.4.1 SPARE WHEEL AND TIRE MOUNTING. WHEN SPECIFIED (SEE 6.1).

3.18.5 TIRE CHAIN CLEARANCE. THERE SHALL BE NO INTERFERENCE WHICH WILL PREVENT USE OF DUAL, TRIPLE TRACE TIRE CHAINS ON DUAL DRIVING WHEELS IN ACCORDANCE WITH SAE J683.

3.18.6 WHEEL-TIRE BALANCING. ALL WHEEL-TIRE ASSEMBLIES OF THE VEHICLE SHALL BE BALANCED IN ACCORDANCE WITH THE CURRENT CHASSIS MANUFACTURER'S STANDARD.

3.19 BRAKES. FULL AIR BRAKES OR BOOSTER HYDRAULIC BRAKES SHALL BE FURNISHED AS SPECIFIED (SEE 6.1).

3.19.1 SERVICE BRAKES.

3.19.1.2 AIR BRAKES. UNLESS OTHERWISE SPECIFIED (SEE 6.1), FULL AIR BRAKES SHALL BE FURNISHED WITH ALL NECESSARY COMPONENTS, BUT NOT LIMITED TO THE FOLLOWING:

1. AIR COMPRESSOR HAVING A CAPACITY OF NOT LESS THAN 12 (CFM).
2. RESERVOIR(S) WITH NOT LESS THAN 2,000 CUBIC INCHES TOTAL CAPACITY, EACH TANK EQUIPPED WITH DRAIN VALVE AUTOMATIC MOISTURE EJECTOR WHEN SPECIFIED (SEE 6.1), AND WITH SAFETY AND CHECK VALVES BETWEEN THE COMPRESSOR AND LAST RESERVOIR TANK.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

3. "S-CAM" TYPE BRAKES.

4. SPRING TYPE PARKING BRAKE

5. DASH MOUNTED AIR RESERVOIR PRESSURE GAUGE AND LOW AIR PRESSURE WARNING BUZZER

6. AIR DRYER, DESICCANT TYPE WITH HEATER AND AUTOMATIC MOISTURE EJECTOR.

3.19.1.3 HYDRAULIC BOOSTER BRAKES. WHEN SPECIFIED (SEE 6.1), THE VEHICLE SHALL BE EQUIPPED WITH VACUUM OR HYDRAULIC ASSISTED, HYDRAULIC ACTUATED FOUR-WHEEL SERVICE BRAKES. VACUUM ASSISTED BRAKES SHALL HAVE A MINIMUM 1000 CUBIC INCH TOTAL VACUUM RESERVE, AND "LOW VACUUM" WARNING INDICATOR LIGHT OR DEVICE IN CAB.

3.19.2 BRAKE PERFORMANCE. THE PARKING BRAKES SHALL BE CAPABLE OF CONTROLLING AND HOLDING THE VEHICLE IN EITHER DIRECTION, FORWARD OR REVERSE, LOADED TO ITS G.V.W. ON A 20 PERCENT GRADE, FREE OF ICE AND SNOW. SERVICE BRAKES SHALL CONFORM TO REQUIREMENTS OF SAE J992.

3.20 CONTROLS AND MECHANISMS.

3.20.1 CONTROLS. CONTROLS SHALL BE COMPLETE AND CONVENIENTLY ACCESSIBLE TO THE OPERATOR. LEVER CONTROLS SHALL BE DESIGNED AND LOCATED SO AS TO PERMIT EASY ENTRANCE AND EXIT TO AND FROM THE OPERATOR'S COMPARTMENT. INSTRUMENTS AND CONTROLS SHALL BE IDENTIFIED AS TO FUNCTION AND INSTALLED IN A MANNER FACILITATING EASY REMOVAL OR SERVICING.

3.20.2 STEERING MECHANISM. THE CHASSIS SHALL BE EQUIPPED WITH MANUFACTURER'S STANDARD POWER STEERING MECHANISM. THE STEERING MECHANISM SHALL PROVIDE FOR OPERATION AND SHALL BE CAPABLE OF CONTROLLING THE DIRECTION OF THE FULLY LOADED VEHICLE UNDER ALL OPERATING CONDITIONS. MEANS SHALL BE PROVIDED FOR RAPID AND EASY ADJUSTMENT TO COMPENSATE FOR WEAR IN THE STEERING MECHANISM. EASILY ACCESSIBLE MEANS OF LUBRICATING THE SYSTEM SHALL BE PROVIDED.

3.21 ELECTRICAL.

3.21.1 EQUIPMENT AND LIGHTING. VEHICLE SHALL BE EQUIPPED WITH A COMPLETE 12 VOLT ELECTRICAL SYSTEM. THE ELECTRICAL SUPPLY SOURCE SHALL BE AS SPECIFIED IN 3.21.2 AND 3.21.3. LIGHTING, SIGNALLING, WIRING AND PROTECTIVE DEVICES, SHALL BE PROVIDED.

3.21.2 BATTERIES. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE TRUCK MANUFACTURER SHALL FURNISH A BATTERY OR BATTERIES WHICH MEET OR EXCEED THE ENGINE MANUFACTURER'S RECOMMENDATIONS FOR STARTING AT TEMPERATURES OF TO 0°F. IN ANY CASE, THE FOLLOWING IS THE MINIMUM COLD CRANKING AMPERES. THE SYSTEM SHALL BE WIRED PER FIGURE 1, AND INCLUDE A VOLTMETER AND LOAD DISCONNECT SWITCH. BATTERY (S) ON TYPES I AND II SHALL BE MOUNTED IN ONE OR TWO COMPARTMENTS. ON TYPES III, IV AND V, BATTERIES SHALL BE MOUNTED IN ONE OR TWO COMPARTMENTS, ONE AT EACH JUMP SEAT. BATTERY(S) COMPARTMENT(S) SHALL BE CONSTRUCTED OF ALUMINUM DIAMOND PLATE WITH HINGED TOPS AND STAINLESS STEEL LATCHES.

VOLTAGE	MINIMUM CCA	
	GASOLINE	DIESEL
12	520	1800

3.21.2.1 HEAVY DUTY BATTERY SYSTEM. WHEN SPECIFIED (SEE 6.1), BATTERIES SHALL BE MOUNTED IN ONE OR TWO COMPARTMENTS ONE ON EACH SIDE OF APPARATUS CONSTRUCTED OF ALUMINUM DIAMOND PLATE WITH HINGED TOPS AND STAINLESS STEEL LATCHES, THE FOLLOWING BATTERIES SHALL BE FURNISHED: FOUR (HIGH CYCLE) MAINTENANCE-FREE TYPE BATTERIES WITH A MINIMUM OF 2300 CCA, PER FIGURE 1.

3.21.3 ALTERNATOR. UNLESS OTHERWISE SPECIFIED (SEE 6.1), AN 12-VOLT ALTERNATOR, AND VOLTAGE CONTROL, SHALL BE PROVIDED, AND MUST CARRY THE FULL ELECTRICAL LOAD AT 14 VOLTS, AT NORMAL ENGINE IDLE AT ALL UNDERHOOD TEMPERATURES.

3.21.4 IGNITION SYSTEM. SHALL BE FURNISHED WITH THE MANUFACTURER'S CURRENT IGNITION SYSTEM IGNITION SYSTEM SHALL BE MOISTURE PROOF; WIRING SHALL BE ROUTED SAFELY, FASTENED SECURELY, CLEAR OF HAZARDS, AND SHALL BE ACCESSIBLE. IGNITION SWITCH FURNISHED SHALL INCLUDE AN ACCESSORY POSITION.

3.21.5 STARTER SYSTEM. A KEYLESS OR KEY CHAINED TO DASH IGNITION SWITCH SHALL BE PROVIDED. A HIGH TORQUE; MINIMUM CURRENT DRAW STARTER MOTOR OF HEAVIEST DUTY AVAILABLE FOR THE MODEL AND ENGINE OFFERED SHALL BE FURNISHED WITH COMPATIBLE SOLENOID AND WIRING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.21.6 WIRING AND DEVICES. WIRING SHALL BE HARNESS TYPE (IN LOOMS), GREASE AND OIL RESISTANT, MOISTURE PROOF, ROUTED IN PROTECTED LOCATIONS NEATLY, SECURELY FASTENED WITH INSULATED METAL CABLE STRAPS, AND ALL APERTURES PROPERLY GROMMETTED FOR PASSING WIRING. WIRING SHALL CONFORM TO SAE J1292 EACH WIRING CIRCUIT EXCEPT STARTING, IGNITION AND FUSIBLE LINK CIRCUITS SHALL BE PROTECTED BY BREAKERS (AUTOMATIC RESET), ALL ADDED WIRING SHALL BE COLOR CODED OR NUMBERED EVERY 3". ALL WIRING SHALL BE IN ACCORDANCE WITH SAE J-163, J-561, J-928, J-553 AND J-1128 SXL TYPE WIRE.

3.22 ELECTROMAGNETIC INTERFERENCE SUPPRESSION. VEHICLE SHALL BE ELECTROMAGNETIC INTERFERENCE SUPPRESSED ACCORDANCE WITH SAE J551 AND J552.

3.23 CHASSIS EQUIPMENT. THE CHASSIS EQUIPMENT, ETC., SHALL BE COMPLETE AND SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, THE EQUIPMENT SPECIFIED HEREIN.

3.23.1 BUMPERS. A FRONT BUMPER SHALL BE PROVIDED FOR ALL VEHICLE TYPES, BUMPER MOUNTING BRACKETS SHALL BE ATTACHED TO FRAME. A WRAP-AROUND BUMPER WITH ALUMINUM DIAMOND PLATE GRAVEL SHIELD SHALL BE FURNISHED ON ALL TYPE IV AND V CABS. ALL BUMPERS SHALL BE CHROME PLATED OR STAINLESS STEEL.

3.23.2 FENDERS. FRONT FENDERS AND RUNNING BOARDS SHALL BE PROVIDED ON ALL CAB TYPES. REAR FENDERS ARE NOT REQUIRED IF WHEELS ARE AMPLY COVERED BY EQUIPMENT COMPARTMENT AND THE REAR WHEEL WELLS ARE PROVIDED WITH FULL INNER SHIELDS.

3.23.3 ENGINE HOOD. THE ENGINE HOOD ON CONVENTIONAL CABS AND FORWARD TYPE SHALL BE SO FITTED TO PREVENT WATER LEAKAGE FROM PRECIPITATION, AND SHALL BE READILY REMOVABLE, OR SHALL OPEN SUFFICIENTLY TO PROVIDE EASY ACCESS TO COMPONENTS IN THE ENGINE COMPARTMENT REQUIRING ROUTINE MAINTENANCE. ON TYPE IV AND V CABS THE HOOD SHALL BE CONSTRUCTED OF ALUMINUM DIAMOND PLATE WITH HINGED SIDE PANELS ON EACH SIDE WITH LATCHES. THIS TYPE OF HOOD SHALL BE ABLE TO SUPPORT A 250 POUND MAN WITHOUT DEFLECTION OR DEFORMATION. ON TYPE IV CABS THE HOODS SHALL NOT HAVE VENTS OR OTHER OPENINGS. HOODS ON TYPE IV AND V SHALL HAVE HEAT AND SOUND DEADENING INSULATION ON THE INSIDE OF ALL PANELS.

3.23.4 CABS. THE CAB SHALL BE OF THE TYPE SPECIFIED (SEE 6.1).

3.23.4.1 TYPE I, CONVENTIONAL TYPE, SHALL BE MANUFACTURER'S STANDARD FULL-WIDTH CAB OF ALL METAL OR METAL AND REINFORCED FIBERGLASS CONSTRUCTION, WITH STANDARD INSULATION, FLOORMATS, CRANK-OPERATED WINDOWS, GLOVE COMPARTMENT AND DOME LIGHTS.

3.23.4.2 TYPE II, TILT TYPE, SHALL BE MANUFACTURER'S STANDARD COMMERCIALLY AVAILABLE LOW TILT CAB WITH FULL-WIDTH ADJUSTABLE SEAT OR TWO INDIVIDUAL ADJUSTABLE SEATS. CAB SHALL HAVE MECHANICAL OR HYDRAULIC TILTING AND LOCKING MECHANISM (IN OPEN OR CLOSED POSITIONS).

3.23.4.3 TYPE III, TILT TYPE WITH JUMP SEATS, SAME AS TILT CAB AND THE FOLLOWING: A CANOPY TYPE ADDITION SHALL BE ADDED TO THE CAB TO COMFORTABLY ACCOMMODATE TWO OR THREE MEN IN A SAFE PROTECTED MANNER.

CANOPY TO BE CONSTRUCTED OF STEEL, BRACED, REINFORCED AND ELECTRICALLY WELDED TO CAB.

CANOPY ROOF, AND SIDE PANELS SHALL BE SAME HEIGHT, AND SHALL FOLLOW THE CURVES AND CONTOUR OF THE CAB.

THE SEAT INSTALLED UNDER THE CANOPY SHALL BE STATIONERY AND NOT RAISE WITH THE CANOPY. SEAT AND BACK REST SHALL HAVE FOAM RUBBER PADDING AND UPHOLSTERED WITH HEAVY-DUTY BLACK VINYL.

THE REAR WINDOW OF THE CAB SHALL BE A SLIDING TWO SECTION WINDOW. THE CANOPY SHALL HAVE ONE WINDOW ON EACH SIDE, NOT LESS THAN 325 SQ. INCHES AREA, EACH WINDOW.

CONTROL FOR TILTING CAB SHALL BE EASILY ACCESSIBLE WITH INSTRUCTION PLATE FOR TILTING THE CAB.

THE WALKWAY BETWEEN THE SEAT AND FRONT OF BODY SHALL BE CONSTRUCTED OF TREADPLATE ALUMINUM WITH REMOVABLE PLATE OVER CHASSIS TRANSMISSION.

3.23.4.4 TYPE IV. FIVE MAN CAB FORWARD, CUSTOM BUILT. CAB FORWARD CANOPY STYLE, DESIGNED FOR FIRE APPARATUS. THE FRONT SECTION SHALL CONTAIN SEATS FOR DRIVER AND TWO PASSENGERS, WITH A RADIO COMPARTMENT UNDER PASSENGER'S SEAT. THE CANOPY SECTION SHALL HAVE TWO SEATS, ONE EACH SIDE OF ENGINE COMPARTMENT MINIMUM OF 25 INCHES WIDE. SEAT CUSHIONS SHALL BE FOAM RUBBER TYPE, UPHOLSTERED IN HEAVY-DUTY BLACK VINYL. THE DRIVER'S SEAT SHALL BE 4-WAY ADJUSTABLE TYPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

THE WINDSHIELD GLASS AREA SHALL NOT BE LESS THAN 2,000 SQ. INCHES (ALL GLASS TO BE SAFETY TYPE).

CAB SHALL HAVE A MINIMUM WIDTH OF 94 INCHES WITH A REMOVABLE SECTION IN ROOF FOR REMOVAL OF ENGINE AND/OR RADIATOR.

3.23.4.5 TYPE V, CAB FORWARD CUSTOM 7 MAN ENCLOSED 4 DOORS. SAME AS 5 MAN AND WITH THE FOLLOWING:

CAB SHALL HAVE 4 DOORS WITH 2 MORE SEATS IN REAR SECTION OF THE FLIP DOWN TYPE ON REAR WALL.

REAR DOORS SHALL HAVE CRANK-OPERATED WINDOW IN EACH DOOR, WINDOWS AND TOP OF DOORS SHALL BE ON THE SAME PLANE AS FRONT DOORS.

3.23.4.6 ALL TYPES OF CAB SHALL HAVE THE FOLLOWING:

A. INSULATION AND SOUND DEADENER.

B. FRONT DOOR VENT WINDOWS, OR SIDE CAB VENT WINDOWS.

C. CRANK-OPERATED WINDOWS.

D. DOOR CHECKS.

E. ALL DOORS SHALL HAVE SEALING TO PREVENT ENTRY OF WATER.

F. UPHOLSTERED DOOR PANELS, HEADLINERS AND SUN VISORS.

G. TYPE III AND IV CABS SHALL HAVE SAFETY BARS ON EACH SIDE AT CANOPY ENTRANCE.

3.23.4.7 CAB TYPE IV AND V WHEN SPECIFIED (SEE 6.1) TYPE IV AND V CAB AND CANOPY SHALL BE ALUMINUM.

3.23.5 SEATBELTS AND ANCHORS. SEATBELT ASSEMBLIES, ATTACHMENT HARDWARE, AND RETRACTORS FOR THE FRONT OUTBOARD BELTS SHALL BE FURNISHED, FOR DRIVER AND EACH OCCUPANT.

3.23.6 GLASS. GLAZING SHALL BE CLEAR AND CONFORM TO FEDERAL MOTOR CARRIER SAFETY REGULATION 393.60. TINTED GLASS SHALL BE FURNISHED WHEN SPECIFIED (SEE 6.1).

3.23.7 INSTRUMENTS, LIGHTS, ETC. THE INSTRUMENTS SHALL BE THE MANUFACTURER'S STANDARD EASILY ACCESSIBLE FOR MAINTENANCE, AND SHALL INCLUDE, BUT NOT BE LIMITED TO, PANEL LIGHTS, INTERIOR DOME LIGHTS, SPEEDOMETER AND RECORDING ODOMETER ACCURATE WITHIN 5 PERCENT, LIGHTING CONTROL SWITCHES AND INDICATORS, CHOKE WHEN APPLICABLE, FUEL SHUT-OFF FOR DIESELS, LOW AIR PRESSURE WARNING DEVICES WHEN AIR BRAKES ARE FURNISHED, TACHOMETER, AMMETER, OR VOLTMETER, OIL PRESSURE, ENGINE TEMPERATURE AND FUEL GAUGE(S), AND HEATER-DEFROSTER CONTROLS. OTHER INSTRUMENTS SHALL BE FURNISHED, WHEN SPECIFIED (SEE 6.1)

3.23.8 ACCESSORIES. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE ACCESSORIES FURNISHED SHALL BE THE MANUFACTURER'S STANDARD AND SHALL INCLUDE, BUT NOT BE LIMITED TO, DUAL AIR OR ELECTRIC, TWO OR MORE SPEEDS, CONSTANT IN EACH SPEED, WINDSHIELD WIPERS; HORN(S); HEATER AND DEFROSTERS; DUAL SUN VISORS; CIGAR LIGHTER; DUAL OUTSIDE REARVIEW MIRRORS; BACK-UP WARNING DEVICE.

3.23.8.1 MUD FLAPS. MUD FLAPS SHALL BE FURNISHED ON ALL VEHICLES WHEN THE HORIZONTAL DISTANCE BETWEEN THE CENTER LINE OF REAR WHEELS AND THE REAR OF VEHICLE IS LESS THAN THREE TIMES THE VERTICAL HEIGHT FROM GROUND TO END OF REAR PLATFORM OR BODY. MUD FLAPS FURNISHED AND INSTALLED SHALL BE FULL-WIDTH OF DUAL REAR TIRES, CONFORMING TO SAE J682 AND BE TWIST AND SAILPROOF, AND DEVOID OF ADVERTISEMENT, EXCEPT FOR SUPPLIER'S NAME OR EMBLEM.

3.23.8.2 MIRRORS, REARVIEW. OUTSIDE REARVIEW MIRRORS FURNISHED SHALL BE DUAL WESTERN TYPE SWING OR EXTENDABLE, BRACKET MOUNTED, INDEPENDENTLY ADJUSTABLE MIRROR HEADS OF THE LARGEST SIZE APPROPRIATE FOR VEHICLE MODEL OFFERED. MIRROR HEADS SHALL INCORPORATE A SEPARATELY ADJUSTABLE WIDE ANGLE (CONVEX) SECTION. MIRRORS SHALL BE SECURELY MOUNTED TO CAB OR CAB DOORS AND FREE OF VIBRATION. REFLECTIVE AREA SHALL BE NOT LESS THAN 70 SQUARE INCHES EACH, SHALL BE CHROME OR STAINLESS STEEL.

3.23.8.3 HEATER AND DEFROSTER. HOT WATER, FRESH AIR TYPE HEATER AND DEFROSTER WITH A 30,000 B.T.U. PER HOUR MINIMUM RATING, SUFFICIENT FOR OCCUPANT'S COMFORT WITH DASH MOUNTED PANEL CONTROLS CONVENIENT TO THE DRIVER, SHALL BE PROVIDED. DISCHARGE OUTLETS SHALL BE PROVIDED TO DIRECT HEATER AIR TO FLOOR AND TO DEFROSTER LOUVERS BY BLOWERS. CAB COMPARTMENT VENTILATOR SYSTEM OTHER THAN WINDOWS SHALL BE PROVIDED ON TYPE I, II, III MODELS. A LARGER CAPACITY HEATER OR AN AUXILIARY RECIRCULATING HEATER MAY BE SPECIFIED (SEE 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.24 TOOLS. WHEN SPECIFIED (SEE 6.1), EACH VEHICLE SHALL BE FURNISHED WITH THE MANUFACTURER'S STANDARD TOOLS INCLUDING, BUT NOT LIMITED TO, HYDRAULIC JACK OF SUFFICIENT CAPACITY TO LIFT WHEEL OF FULLY LOADED VEHICLE TO HEIGHT NECESSARY TO PERMIT REMOVAL AND REPLACEMENT OF WHEEL AND TIRE ASSEMBLY, JACK HANDLE, AND LUG NUT WRENCH.

3.25 BODY AND APPARATUS.

3.25.1 BODY. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE TRUCK SHALL BE EQUIPPED WITH A BODY WHICH INCORPORATES A PUMP HOUSING, OPERATOR'S PANEL, HOSE BED, EQUIPMENT COMPARTMENTS, RUNNING BOARDS, REAR STEP, AND WATER TANK. FOUR FOLDING STEPS WITH KICKPLATES SHALL BE FURNISHED, TWO AT REAR AND ONE EACH SIDE ON FRONT OF SIDE COMPARTMENT TO PROVIDE ACCESS TO HOSE BED OR REELS. THE BODY SHALL BE MADE OF NOT LESS THAN 12 GA. GALVANNEAL STEEL, REINFORCED AT ALL POINTS WHERE HOSE,LADDER AND OTHER EQUIPMENT CLAMPS ARE ATTACHED. THE BODY SIDE PANELS SHALL BE FORMED OUT AND DOWN ON TOP AND AT REAR FOR STRENGTH. SIDE PANELS ARE NOT TO BE PART OF LOWER SIDE COMPARTMENT. THE REAR BODY PANEL BELOW HOSE BED DOWN TO THE STEP SHALL BE ALUMINUM DIAMOND PLATE. WHEN A TYPE III, IV OR V CAB IS USED THE FRONT BODY PANEL SHALL BE ALUMINUM DIAMOND PLATE. THE INSIDE OF BOTH BEAVERTAILS IS TO BE COVERED WITH ALUMINUM DIAMOND PLATE OR EQUAL. ALUMINUM SHALL BE FASTENED TO STEEL WITH STAINLESS STEEL FASTENERS, AND BE SEPARATED WITH AN INSULATOR TO PREVENT ELECTROLYSIS.

3.25.2 PUMP HOUSING AND STOWAGE BIN. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A STOWAGE BIN SHALL BE PROVIDED OVER THE PUMP. THIS BIN SHALL HAVE A REMOVABLE BOTTOM PANEL LARGE ENOUGH TO ENABLE THE PUMP TO BE REMOVED WITH SUCTION AND DISCHARGE CONNECTIONS REMOVED. THE BOTTOM SHALL SUPPORT 200 POUNDS ON ANY ONE SQUARE FOOT AREA WITHOUT PERMANENT DEFORMATION. ADEQUATE DRAIN HOLES SHALL BE PROVIDED. WHEN SPECIFIED (SEE 6.1), TWO 1 1/2 INCH CROSSLAY SHALL BE FURNISHED IN THE FRONT OF THE STOWAGE BIN WITH A CAPACITY OF 200 FEET EACH OF 1 1/2 INCH DOUBLE JACKETED FIRE HOSE. STAINLESS STEEL ROLLERS SHALL BE PROVIDED ON EACH SIDE AND BOTTOM. EACH CROSSLAY SHALL BE EQUIPPED WITH SWIVEL, 1 1/2 INCH 1/4 TURN BALL VALVES CONTROLLED FROM PUMP PANEL AND DISCHARGE GAUGES. AN ALUMINUM DIAMOND PLATE DOOR WITH A FULL LENGTH STAINLESS STEEL HINGE AND LATCHES SHALL COVER THE CROSSLAYS. THE PUMP HOUSING SHALL HAVE REMOVABLE SIDE PANELS (LEFT AND RIGHT) FOR PUMP REPAIRS. PUMP HOUSING SHALL HAVE A 4 INCH HIGH ALUMINUM DIAMOND PLATE KICK PLATE ON EACH SIDE AT THE BOTTOM OF PANELS.

THE PUMP HOUSING MAY BE LOWER THAN THE HOSE BED WHEN LARGE TANKS AND HOSE BED ARE SPECIFIED.

3.25.3 FIRE HOSE COMPARTMENTS. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A HOSE COMPARTMENT(S) SHALL BE PROVIDED, DESIGNED TO ACCOMMODATE NOT LESS THAN 1,500 FEET OF 2 1/2 INCH RUBBER LINED DOUBLE JACKETED FIRE HOSE, AND 400 FEET OF 1 1/2 INCH RUBBER LINED DOUBLE JACKETED FIRE HOSE. A PARTITION SHALL BE PROVIDED TO SEPARATE THE 1 1/2 INCH AND 2 1/2 INCH HOSE. COMPARTMENTS SHALL BE CONSTRUCTED OF STEEL AND REINFORCED AT CORNERS. FLOORING TO BE CONSTRUCTED OF ALUMINUM SLATS. SLATS TO BE NO LESS THAN 3 1/2 INCHES WIDE X 3/4 INCH THICKNESS, SPACED TO PROVIDE VENTILATION. FLOORING SHALL BE REMOVABLE. FLOORING SHALL ALSO BE PROVIDED IN CROSSLAY WHEN CROSSLAYS ARE SPECIFIED, WITH HARD RUBBER INSULATORS.

3.25.4 EQUIPMENT COMPARTMENTS. UNLESS OTHERWISE SPECIFIED (SEE 6.1), TWO EQUIPMENT COMPARTMENTS SHALL BE PROVIDED ON EACH SIDE OF THE BODY, ONE IN FRONT AND ONE TO THE REAR OF WHEEL HOUSINGS. THE COMPARTMENT WIDTH SHALL BE APPROXIMATELY 24 INCHES WIDE; HEIGHT SHALL NOT BE LESS THAN 28 INCHES AND DEPTH SHALL BE NOT LESS THAN 20 INCHES. EACH COMPARTMENT SHALL HAVE FORWARD HINGED DOORS WITH FULL BOX PAN, STAINLESS STEEL HINGE, TWO POINT LATCH WITH RECESSED PADDLE HANDLE OR BENT "D" RING, AND AUTOMOTIVE TYPE GASKET TO PREVENT ENTRY OF WATER. IN ADDITION, A COMPARTMENT SHALL BE PROVIDED ON THE REAR PANEL BELOW HOSE BED. THIS COMPARTMENT SHALL FIT BETWEEN THE TRUCK FRAME, AND BETWEEN THE HOSE BED AND REAR STEP. COMPARTMENT SHALL HAVE A SINGLE BOXPAN DOOR, HINGED ON THE SIDE, WITH LATCHES IDENTICAL TO SIDE COMPARTMENT. ALL COMPARTMENTS (SIDE AND REAR) SHALL HAVE SWEEPOUT FLOORS. AN ALUMINUM DRIP MOLDING SHALL BE PROVIDED OVER AND EXTEND PAST ALL COMPARTMENT DOORS. WHEEL SKIRTING SHALL BE PROVIDED BETWEEN SIDE COMPARTMENTS WITH A FULL INNER WHEEL LINER. ALL COMPARTMENTS SHALL HAVE VENTS NOT LESS THAN 12 SQUARE INCHES LOCATED NOT TO PICK UP WATER OR DIRT.

WHEN SPECIFIED (SEE 6.1), A COMPARTMENT SHALL BE FURNISHED AHEAD OF PUMP HOUSING ON EACH SIDE NOT LESS THAN 15 INCHES WIDE X 10 INCHES DEEP X 34 INCHES HIGH. THE DOOR ON THIS COMPARTMENT SHALL BE IDENTICAL TO SIDE COMPARTMENTS.

3.25.5 RUNNING BOARDS AND REAR PLATFORM. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE TRUCK SHALL BE EQUIPPED WITH RUNNING BOARDS AND A REAR PLATFORM. THE REAR PLATFORM SHALL BE OF A SIZE TO ACCOMMODATE FOUR MEN, WEIGHING 175 EACH, WITHOUT NOTICEABLE DEFLECTION. THE RUNNING BOARDS AND REAR STEP SHALL BE CONSTRUCTED OF ALUMINUM DIAMOND PLATE, WITH RADIUS AT THE CORNERS, AND FORMED DOWN NOT LESS THAN 2 INCHES AND BACK 1 INCH. THE RUNNING BOARDS AND REAR STEP SHALL NOT BE MORE THAN 24 INCHES ABOVE THE GROUND. SIDE RUNNING BOARDS SHALL BE CONTINUOUS FROM THE FRONT OF THE BODY TO THE SIDE EQUIPMENT CABINETS. A RUB RAIL SHALL RUN FROM THE RUNNING BOARDS BELOW THE SIDE COMPARTMENT TO THE FRONT OF THE WHEEL OPENING AND FROM THE REAR WHEEL OPENING TO THE REAR STEP. THE RUB RAIL SHALL NOT BE LESS THAN 1 INCH OUT PAST THE SIDE COMPARTMENT AND FORMED DOWN AND BACK LIKE THE RUNNING BOARDS AND REAR STEP, AND OF THE SAME MATERIAL. RUNNING BOARDS AND REAR PLATFORM SHALL BE SUPPORTED BY STRUCTURAL STEEL ASSEMBLIES BOLTED TO CHASSIS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

3.25.6 HANDRAILS. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE REAR STEP SHALL BE PROVIDED WITH TWO VERTICAL GRAB RAILS FOR MOUNTING THE STEP, AND A HORIZONTAL HANDRAIL NOT OVER 66 INCHES ABOVE THE STEP, WITH REINFORCING ROD. THE HANDRAIL SHALL BE LOCATED NOT MORE THAN 6 INCHES FORWARD OF THE REAR END OF THE HOSE BED, OR 6 INCHES FORWARD OF THE CLEAR AREA OF THE REAR STEP. ALL THE GRAB RAILS AND HANDRAIL SHALL BE NOT LESS THAN 1 1/4 INCH STAINLESS STEEL TUBING AND SHALL BE SECURELY MOUNTED WITH CHROME PLATED BRASS OR POLISHED STAINLESS STEEL STANCHIONS. ON TYPE III, IV AND V CABS ONE 18 INCH HANDRAIL SHALL BE AT EACH CAB AND CANOPY ENTRANCE WITH STAINLESS STEEL TRIM PLATE.

3.25.7 BOOSTER TANK. THE TANK SHALL BE OF RECTANGULAR "T" DESIGN WITH A REMOVABLE TOP. THE REMOVABLE TOP TO BE LARGE ENOUGH TO PERMIT COMPLETE CLEANING OR REPAIR OF TANK OR BAFFLES. TOP SHALL BE GASKETED TO PREVENT LEAKAGE DUE TO SURGING OF WATER, THE TOP RETAINING SCREWS OR FASTENERS SHALL NOT COME IN CONTACT WITH WATER. TANK CONSTRUCTION SHALL ALLOW WATER TO BE PUMPED OUT WHEN THE TRUCK IS STANDING ON A 20% GRADE IN ALL PLANES. INTERNAL BAFFLES TO BE PROVIDED AS PER (N.F.P.A. 1901 CHAPTER 6); THE TANK SHALL BE EQUIPPED WITH SUITABLE METHOD FOR LIFTING TANK OUT OF BODY WITHOUT THE REMOVAL OF BODY PANELS. THE TANK SHALL HAVE A FILL TOWER NOT LESS THAN 6 INCHES BY 10 INCHES WITH AN EASILY REMOVABLE SCREEN, 3 INCH VENT/OVERFLOW (OVERFLOW TO EXIT TO THE REAR OF REAR WHEELS). FILL TOWER SHALL HAVE A HINGED COVER TO PREVENT WATER FROM SPLASHING OUT WHILE VEHICLE IS IN MOTION. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE TANK SHALL BE CONSTRUCTED OF 10 GA., 304 STAINLESS STEEL. THE TANK CAPACITY SHALL BE SPECIFIED (SEE 6.1). ALL TANK MOUNTING SHALL INCORPORATE A FULL FLOATING DESIGN TO PREVENT CRACKING DUE TO CHASSIS FLEXING. THE TANK OUTLET BETWEEN TANK AND PUMP SHALL PERMIT A FLOW AS PER (N.F.P.A. 1901 CHAPTER 6) OR AS SPECIFIED (SEE 6.1).

3.25.8 PIPING. THE TANK TO PUMP LINE SHALL BE NOT LESS THAN 2 1/2 INCHES WITH CHECK VALVE, AND FULL FLOW BALL QUARTER TURN VALVE WITH CONTROL MOUNTED ON OPERATOR'S PANEL. PUMP TO TANK LINE SHALL BE NOT LESS THAN 1 INCH ON 500 GALLON TANK AND NOT LESS THAN 1 1/2 INCH ON 750 GALLON AND LARGER TANKS WITH CONTROL MOUNTED ON OPERATOR'S PANEL. ALL LINES FROM AND TO THE TANK SHALL HAVE FLEXIBLE FITTINGS. ALL VALVES USED IN THE PIPING SHALL BE ABLE TO BE TAKEN APART FOR SERVICE WITHOUT DISTURBING PIPING. THE PIPE LINE BETWEEN PUMP AND BOOSTER REEL(S) SHALL BE NOT LESS THAN 1 INCH WITH A QUARTER TURN VALVE FROM EACH REEL WITH CONTROL(S) MOUNTED ON OPERATOR'S PANEL. ALL PIPING SHALL BE GALVANIZED. DRAINS SHALL BE PROVIDED IN ALL PIPING WHERE WATER MAY BE TRAPPED AND FREEZE, THE DRAIN VALVE SHALL BE OPERABLE FROM THE OPERATOR'S SIDE WITHOUT THE NECESSITY OF CRAWLING UNDERNEATH THE TRUCK. CONTROLS SHALL NOT HANG BELOW THE RUNNING BOARD.

3.25.9 FIRE PUMP. THE PUMP SHALL BE MIDSHIP MOUNTED, MULTI-STAGE CENTRIFUGAL PARALLEL SERIES TYPE, OR SINGLE STAGE TYPE WHEN SPECIFIED (SEE 6.1), HAVING A RATED CAPACITY AS SPECIFIED (SEE 6.1), DRIVEN BY THE TRUCK ENGINE FROM THE OUTPUT SHAFT OF THE ROAD TRANSMISSION. THE PUMP CASING SHALL BE FERROUS ALLOY WITH A STAINLESS STEEL SHAFT AND BRONZE IMPELLER(S). PUMP SHAFT SHALL HAVE BALL, ROLLER, OR INTERNAL SLEEVE BEARING. IMPELLER(S) SHALL BE STATIC BALANCED WITHIN 0.5 OZ-IN. PUMP TRANSMISSION SHALL HAVE HARDENED ALLOY STEEL GEARS OR SPROCKETS. IF A CIRCULATING WATER-OIL COOLER IS NEEDED TO MAINTAIN THE OIL OPERATING TEMPERATURE RECOMMENDED BY THE PUMP MANUFACTURER, THE COILS OR PIPING THROUGH WHICH WATER FLOWS SHALL DRAIN AUTOMATICALLY WHEN THE PUMP IS DRAINED. ALL LEVERS OR OTHER DEVICES USED FOR PUMP CONTROLS SHALL BE PROVIDED WITH POSITIVE CATCHES OR OTHER MEANS TO PREVENT THEM FROM BEING JARRED OR OTHERWISE ACCIDENTLY MOVED OUT OF POSITION. CONTROLS FOR CHANGING INTO PUMPING MODE SHALL BE OPERABLE FROM THE DRIVER'S POSITION AND SHALL BE ADEQUATELY IDENTIFIED. WHEN AN AUTOMATIC TRANSMISSION IS SPECIFIED N.F.P.A. 1901 3-3.4.10 SHALL BE FURNISHED.

WHEN SPECIFIED THE PUMP SHALL BE OF THE PUMP AND ROLL TYPE. THE PUMP AND ROLL TYPE PUMP SHALL BE DRIVEN BY EITHER A FULL TORQUE P.T.O. OR 2 POSITION GEAR CASE. ALL TYPES SHALL HAVE A INDICATOR LIGHT TO SHOW PUMPING MODE.

ALL PUMPS SHALL BE TESTED PER (N.F.P.A. 1901 CHAPTER 11) BY UNDERWRITERS LABORATORIES, INC. SEE 4.2 THE TORQUE RATING ON INPUT AND OUTPUT SHAFT SHALL AT LEAST EQUAL THE MAXIMUM GROSS TORQUE DEVELOPED BY THE ENGINE IN THE LOWEST TRANSMISSION RATIOS.

3.25.10 PRIMING PUMP. THE PRIMING PUMP SHALL BE OF THE ROTARY TYPE, 12-VOLT, MOTOR-DRIVEN, COMPLETE WITH LUBRICATING OIL RESERVOIR AND NECESSARY VALVES, OPERATED FROM THE PUMP PANEL. THE PRIMING PUMP SHALL DEVELOP A VACUUM OF 22 INCHES OF MERCURY (HG) AT AN ALTITUDE UP TO 1,000 FEET ABOVE SEA LEVEL IN NOT MORE THAN 30 SECONDS.

3.25.11 PRESSURE RELIEF VALVE. AN AUTOMATIC RELIEF VALVE OR PRESSURE REGULATOR AS SPECIFIED (SEE 6.1), SHALL BE PROVIDED FOR CONTROLLING THE PRESSURE FROM ALL OUTLETS. THE LOCATION OF THE RELIEF VALVE OR PRESSURE REGULATOR CONTROL SHALL BE SUCH THAT ADJUSTMENT CAN READILY BE MADE BY THE OPERATOR WHEN STANDING IN NORMAL POSITION, WITHOUT THE USE OF TOOLS, AND IN FULL VIEW OF ALL DISCHARGE PRESSURE GAUGES. THE RELIEF VALVE OR REGULATOR SHALL BE OF SUCH DESIGN THAT WHEN SET 10 PSI HIGHER THAN THE PUMP WORKING PRESSURE, THERE WILL NOT BE AN INCREASE IN PUMP PRESSURE GREATER THAN 30 PSI WHEN DISCHARGE LINES ARE SHUT SLOWLY. THE RELIEF VALVE OR REGULATOR, SHALL PERFORM SATISFACTORILY WHEN PUMPING RATED CAPACITY AT ANY PUMP WORKING PRESSURE 90 TO 300 PSI, (SEE 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.25.12 TRANSFER VALVE. THE TRANSFER VALVE SHALL BE ELECTRICALLY, MANUALLY OR HYDRAULICALLY OPERATED AS SPECIFIED (SEE 6.1). THE POSITION FOR PARALLEL (VOLUME) AND SERIES OPERATION (PRESSURE) SHALL BE CLEARLY INDICATED ALONG WITH A MANUAL OVERRIDE PROVIDED ON OPERATOR'S PANEL. THE TRANSFER VALVE, IF OTHER THAN SPECIFIED SHALL HAVE THE ABILITY TO CHANGE FROM SERIES OPERATION TO PARALLEL WITHOUT REDUCING ENGINE SPEED WHILE MAINTAINING AN EFFECTIVE FIRE STREAM AT THE NOZZLE AT ALL TIMES, (SEE 6.1).

3.25.13 AUXILIARY COOLING SYSTEM. A SUPPLEMENTARY HEAT EXCHANGE COOLING SYSTEM SHALL BE INSTALLED TO PERMIT USE OF WATER FROM THE DISCHARGE SIDE OF THE FIRE PUMP FOR COOLING OF WATER CIRCULATING THROUGH THE ENGINE COOLING SYSTEM. HEAT EXCHANGER TO BE MADE OF BRONZE OR COPPER AND SHALL BE A SEPARATE UNIT INSTALLED IN ENGINE COMPARTMENT WITH VALVE CONTROL ON OPERATOR'S PANEL. AN EMERGENCY RADIATOR REFILL LINE SHALL ALSO BE PROVIDED WITH CONTROL ON OPERATOR'S PANEL, WHEN SPECIFIED (SEE 6.1).

3.25.14 SUCTION INLETS. TWO SUCTION INLETS, ONE ON EACH SIDE, AND OF THE SAME SIZE AS THE SUCTION HOSE AS SPECIFIED IN N.F.P.A. 1901, 3-1.2.2 SHALL BE PROVIDED WITH LONG HANDLED CHROME PLATED CAPS. ONE OR TWO AS SPECIFIED (SEE 6.1), 2 1/2 INCH GATED SUCTION INLETS SHALL BE PROVIDED WITH FULL-FLOW QUARTER TURN BALL VALVE, CHROME PLATED PLUG AND BLEEDER DRAIN. WHEN SPECIFIED (SEE 6.1), A GATED FRONT OR REAR INLET SHALL BE PROVIDED. ALL INLETS SHALL HAVE REMOVABLE STRAINERS.

3.25.15 DISCHARGE OUTLETS. 2 1/2 INCH DISCHARGE OUTLETS SHALL BE PROVIDED AS SPECIFIED (SEE 6.1), EACH OUTLET SHALL BE PROVIDED WITH A QUARTER TURN FULL-FLOW BALL VALVE CONTROLLED FROM OPERATOR'S PANEL, 3/4 INCH DRAIN VALVE PIPED BELOW PUMP FOR DRAINING HOSE LINE, AND A ROCKER LUG, CHROME PLATED GASKETED CAP CHAINED TO VALVE OR PANEL. ONE 1 1/2 INCH DISCHARGE LOCATED ON THE REAR PANEL BELOW 1 1/2 INCH HOSE BED, WITH A FLOW OF NOT LESS THAN 150 GPM WITH NO MORE THAN 40 PSI FRICTION LOSS SHALL BE PROVIDED. 1 1/2 DISCHARGE SHALL HAVE A QUARTER TURN FULL-FLOW BALL VALVE CONTROLLED FROM OPERATOR'S PANEL. ALL DISCHARGES SHALL HAVE GAUGES AND UNLESS OTHERWISE SPECIFIED (SEE 6.1) MALE N.S. THREADS.

3.25.16 PUMP EQUIPMENT. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE FOLLOWING EQUIPMENT SHALL BE FURNISHED:

(A) ONE FIFTEEN FOOT LENGTH OF SOFT SUCTION HOSE, SIZE AS SPECIFIED (SEE 6.1), COMPLETE WITH LIGHT WEIGHT FEMALE N.S.T. COUPLINGS SIZE AS SPECIFIED (SEE 6.1).

(B) TWO TEN FEET LENGTHS OF HARD SUCTION HOSE, SIZE AS SPECIFIED (SEE 6.1), COMPLETE WITH ONE MALE AND ONE FEMALE LIGHT WEIGHT N.S.T. COUPLINGS MOUNTED IN STEEL TROUGHS ON LEFT UPPER SIDE BODY PANEL WITH CHROME PLATED QUICK RELEASE LOCKS.

(C) ONE ALUMINUM SUCTION HOSE STRAINER, SIZE AS SPECIFIED (SEE 6.1), WITH THIRTY FEET OF ROPE AND MOUNTING BRACKET.

3.25.17 HOSE REEL(S). UNLESS OTHERWISE SPECIFIED (SEE 6.1), ONE DRUM TYPE HOSE REEL, ELECTRIC, 12 VOLT, REWIND TYPE GEAR OR CHAIN DRIVEN DRUM, COMPLETE WITH 200 FEET OF ONE INCH, 800 POUND WORKING PRESSURE HOSE (FOUR 50-FOOT LENGTHS WITH COUPLINGS AND HIGH PRESSURE FOG NOZZLE SHALL BE FURNISHED). THE HOSE REEL SHALL BE MOUNTED ABOVE THE PUMP AT THE FORWARD END OF THE BODY. CHROME PLATED GUIDES OR ROLLERS SHALL BE PROVIDED ON EACH SIDE OF REEL OPENING. REEL SHALL BE EQUIPPED WITH A POSITIVE LOCKING BRAKE TO PREVENT LOOSENING ON THE REEL DRUM DURING A PUMPING OPERATION. A HAND REWIND CRANK SHALL BE PROVIDED FOR RETRIEVING OF HOSE IN THE EVENT OF AN ELECTRICAL FAILURE. VALVE, (QUARTER TURN BALL TYPE), SERVING HOSE REEL SHALL BE CONTROLLED FROM PUMP PANEL. THE HOSE REEL SWIVELS FURNISHED SHALL BE OF THE NONPACKED TYPE WATER LUBRICATED. THE REEL AND SWIVELS SHALL BE CAPABLE OF WITHSTANDING 1,000 PSI STATIC PRESSURE TEST. THE NOZZLE SHALL BE CAPABLE OF DELIVERING NO LESS THAN 30 GALLONS OF WATER PER MINUTE AND HAVE A COMPLETE RANGE OF ADJUSTMENT FROM FULL FOG TO LONG RANGE STREAM. THE ADJUSTMENT SHALL REMAIN CONSTANT AFTER BEING SET, NOT DEPENDENT ON GRIP OF HANDS TO KEEP THE SHAPE OF FOG REQUIRED. SHUTOFF CONTROL SHALL BE SEPARATE FROM FOG ADJUSTMENT. TWO COUPLING SPANNER WINCHES SHALL BE FURNISHED.

3.25.18 OPERATOR'S CONTROL PANEL. UNLESS OTHERWISE SPECIFIED (SEE 6.1), ALL PUMP CONTROLS AND GAUGES TO BE LOCATED AT LEFT SIDE OF APPARATUS. THE COMPLETE PUMP PANELS RIGHT AND LEFT SHALL BE SATIN FINISHED STAINLESS STEEL. EMBOSSED METAL OR LAMINATED PLASTIC PLATES, PERMANENTLY SECURED WITH FASTENERS, SHALL BE PROVIDED INDICATING EACH CONTROL ON PANEL. DISCHARGE CONTROLS SHALL BE EITHER PUSH-PULL OR SWING TYPE. PUSH-PULL DISCHARGE CONTROLS TO HAVE CHROME OR CADMIUM PLATED RODS, MINIMUM 1/2 INCH DIAMETER. DISCHARGE CONTROLS TO BE LOCKING TYPE, PUSH-PULL TYPE TO PULL STRAIGHT OUT OF PANEL. REMOTE CONTROL PUSH-PULL RODS MUST PULL STRAIGHT OUT OF PANEL WITH GUIDES AND JOINTS TO ELIMINATE BINDING. PUMP PANEL SHALL BE DESIGNED TO PERMIT EASE OF REMOVAL. AMPLE LIGHTING SHALL BE PROVIDED SO THAT THE OPERATOR'S PANEL WILL BE FULLY ILLUMINATED WITH A FULL LENGTH POLISHED STAINLESS STEEL SHIELD PROVIDED TO DIRECT THE LIGHT DOWNWARD AND PROTECT THE BULB(S). THE LEFT SIDE SHALL HAVE TWO SATIN FINISHED STAINLESS STEEL PANELS. THE UPPER ONE FOR ALL GAUGES, LOWER ONE FOR CONTROLS, INLETS AND OUTLETS.

WHEN SPECIFIED (SEE 6.1), A TOP MOUNT CONTROL PANEL SHALL BE FURNISHED, MADE INTO THE FRONT OF BODY WITH OPERATOR FACING TO THE REAR. THESE SHALL HAVE REMOVABLE PANEL(S) FOR REPAIRING OF CONTROLS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE FOLLOWING CONTROLS, GAUGES, AND INDICATORS SHALL BE PROVIDED, MOUNTED ON THE PANEL:

(A) SUCTION INLET CONTROLS, 2 1/2 INCH.

(B) DISCHARGE OUTLET CONTROLS.

(C) RELIEF VALVE CONTROL.

(D) CONTROLS FOR TANK REFILL.

(E) MANUAL PUMP SHIFT OVERRIDE CONTROL.

(F) MASTER PRESSURE AND SUCTION GAUGES, 30 IN. HG.-0-600 LB./SQ. IN, WITH N.F.P.A. TEST PLUGS.

(G) INDIVIDUAL PRESSURE GAUGES FOR ALL DISCHARGES -0-600 LBS., 2 1/2 INCH DIAMETER, MINIMUM.

(H) ALL GAUGES SHALL BE THE LIQUID FILLED TYPE. (PRESSURE AND VACUUM).

(I) ENGINE OIL PRESSURE GAUGE.

(J) ENGINE WATER TEMPERATURE GAUGE.

(K) TACHOMETER, HANDCOUNTER R.P.M. OUTLET, AND ENGINE HOUR METER.

(L) MASTER PUMP DRAIN CONTROL.

(M) INDIVIDUAL DRAIN VALVES.

(N) TANK WATER LEVEL GAUGE.

(O) VERNIER TYPE QUICK ACTION ENGINE THROTTLE.

(P) MANUFACTURER'S AND UNDERWRITER'S DATA PLATE.

(Q) VOLTMETER.

(R) AUXILIARY COOLING.

3.25.19 ELECTRICAL EQUIPMENT. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE FOLLOWING SHALL BE PROVIDED:

(A) TWO CHROME PLATED, SEALED BEAM, INNER CAB CONTROLLED SPOTLIGHTS, 6 INCH SIZE, AND MOUNTED ON EACH SIDE OF CAB.

(B) TWO SWIVEL-TYPE, 6 INCH SEALED BEAM, CHROME PLATED, HOSE PICKUP LIGHTS MOUNTED, ONE ON EACH REAR CORNER, ABOVE THE HOSE COMPARTMENT.

(C) TWO BACKUP LIGHTS, FLUSH MOUNTED IN REAR OF BODY, TO PROVIDE AMPLE ILLUMINATION FOR BACKING UP VEHICLE.

(D) ENGINE COMPARTMENT WORK LIGHT.

(E) PUMP COMPARTMENT WORK LIGHT.

(F) COMBINATION TAIL, STOP, AND DIRECTIONAL SIGNALS, FLUSH MOUNTED.

(G) ALL CLEARANCE AND MARKER LIGHTS, REFLECTORS, AND LICENSE PLATE BRACKET AND OTHER LIGHTS SHALL CONFORM TO FMVSS NO. 108. THE REAR CLUSTER MARKER LIGHTS SHALL BE MOUNTED IN A MANNER AND LOCATION TO PROVIDE FOR PROTECTION OF LIGHTS.

(H) TWO ALTERNATELY FLASHING RED WARNING LIGHTS SHALL BE PROVIDED AT REAR, MOUNTED ON BRACKETS, WHICH ALSO SUPPORT THE TWO HOSE DECK LIGHTS. ALL WIRING TO BE COMPLETELY ENCLOSED.

(I) A MASTER SWITCH SHALL BE PROVIDED, FOR ALL WARNING LIGHTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

(J) A 12 VOLT EMERGENCY REVOLVING LIGHT SHALL BE FURNISHED, HAVING 4 SEALED BEAMS, 2 CLEAR AND 2 RED, EACH CLEAR LAMP HAVING A MINIMUM OF 35,000 CANDLE POWER, MOUNTED ON TOP OF CAB AND SHALL BE VISIBLE AT ALL TIMES THROUGH 360 DEGREES.

(K) CONTROLS FOR ALL THE WARNING LIGHTS SHALL BE INDEPENDENT OF SIREN AND EACH SHALL BE PROVIDED WITH A PILOT LIGHT INDICATING THE "ON" POSITION.

(L) WHEN SPECIFIED (SEE 6.1), A 110 VOLT AC ON BOARD POWER SYSTEM SHALL BE PROVIDED FOR THE OPERATION OF TOOLS AND RESCUE EQUIPMENT, WITH REQUIRED OUTLETS AND OUTPUT AS SPECIFIED (SEE 6.1).

(M) ONE COMPARTMENT LIGHT SHALL BE PROVIDED IN EACH COMPARTMENT, ALL CONTROLLED BY ONE SWITCH IN CAB AND HAVING A PILOT LIGHT TO INDICATE WHEN THESE CIRCUITS ARE IN OPERATION.

(N) TWO ALTERNATELY FLASHING RED 6 INCH WARNING LIGHTS SHALL BE PROVIDED ON THE FRONT.

3.25.20 COMMUNICATIONS.

(A) RADIO (MOBILE) PROVISIONS. ALL FIRE APPARATUS SHALL BE PROVIDED WITH SUFFICIENT VENTILATED SPACE FOR INSTALLATION AND SERVICING OF MODERN TWO-WAY RADIOS. UNLESS OTHERWISE SPECIFIED (SEE 6.2), THE CONSIGNEE WILL LOCALLY INSTALL MOBILE RADIO UNIT(S) OR SHALL PROVIDE ANY ADDITIONAL DATA, EQUIPMENT, AND A COORDINATOR TO INSURE COMPATIBILITY OF SPECIFIED SYSTEMS.

(B) ANTENNA, CABLE AND MOUNTINGS. ANTENNA WHEN FURNISHED SHALL MEET THE REQUIREMENTS OF EIA STANDARD RS329 PART II. THE COAXIAL LEAD-IN WIRE FURNISHED SHALL BE OF THE IMPEDANCE, LOSS, AND POWER HANDLING CAPABILITY SPECIFIED BY THE MOBILE RADIO MANUFACTURERS. THE CONTRACTOR SHALL PROVIDE EACH FIRE ENGINE WITH A GROUND PLANE OPENING, AND COAXIAL LEAD-IN WIRE FROM THE VENTILATED RADIO STORAGE COMPARTMENT TO THE ANTENNA PORT.

(C) TWO-WAY (MOBILE) RADIO EQUIPMENT. WHEN SPECIFIED (SEE 6.1), A TWO-WAY RADIO SHALL BE FURNISHED AS SPECIFIED.

(D) A SIGNALLING DEVICE, (A BUZZER OR SIMILAR DEVICE) FOR COMMUNICATING BETWEEN CAB AND REAR STEP SHALL BE FURNISHED, WITH A WEATHER PROOF PUSH BUTTON(S).

3.25.21 SIREN - PUBLIC ADDRESS SYSTEM. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A COMBINATION ELECTRONIC SIREN WITH INTEGRAL PUBLIC ADDRESS SYSTEM, AND RADIO AMPLIFICATION CAPABILITY SHALL BE PROVIDED. THE SIREN'S CONTROL FUNCTIONS AND RELATED CHARACTERISTIC SOUND PATTERNS SHALL CONSIST OF AT LEAST MANUAL, WAIL, YELP AND HI-LO (EUROPEAN). THE SYSTEM SHALL HAVE REMOTE CONTROL CAPABILITY FROM THE PASSENGER SEAT, AND DRIVER'S HORN RING (SIREN/HORN SWITCH) AND ALL OTHER NECESSARY HARDWARE.

THE SIREN SHALL BE CAPABLE OF PRODUCING A CONTINUOUS WARNING SOUND AT A MINIMUM LEVEL OF 123 DB A-WEIGHTED, AT 3M (10 FEET) ON AXIS WITH 13.6 VOLTS INPUT, AT A FUNDAMENTAL FREQUENCY IN THE RANGE OF 500 TO 2,000 HZ MAXIMUM IN BOTH WAIL AND YELP MODES.

TWO CHROMED OR POLISHED STAINLESS STEEL SPEAKERS SHALL BE INSTALLED OUTSIDE THE VEHICLE MOUNTED JUST ABOVE THE FRONT BUMPER AND BELOW HEADLIGHTS.

WHEN SPECIFIED, AN ELECTRIC-MECHANICAL 12 VOLT SIREN, COASTER TYPE, CHROME PLATED WITH ELECTRIC BRAKE, CAPABLE OF PRODUCING 1230 DB AT TEN FEET SHALL BE PROVIDED. SIREN TO BE OPERATED BY SWITCHES, ONE EACH SIDE OF CAB.

3.25.22 ACCESSORIES. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE FOLLOWING SHALL BE FURNISHED, IN PLACE OF N.F.P.A. BASIC EQUIPMENT (10-2.1).

A. REMOVABLE LAMINATED NYLON COVER FOR HOSE COMPARTMENT(S) COVER SHALL BE HELD IN PLACE WITH ELASTIC BANDS ALONG FRONT AND EACH SIDE, AND WEIGHTED AT REAR.

B. ONE TEN FOOT PIKE POLE WITH FIBERGLASS HANDLE, MOUNTED BELOW LADDERS.

C. ONE 15 LB. CO_2 FIRE EXTINGUISHER WITH BRACKET*.

D. ONE 20 LB. DRY CHEMICAL EXTINGUISHER, A.B.C. TYPE WITH BRACKET*.

E. ONE 2 1/2 INCH DOUBLE FEMALE CONNECTION, LIGHTWEIGHT TYPE WITH MOUNTING PLATE.*

F. ONE 2 1/2 INCH DOUBLE MALE CONNECTION, LIGHTWEIGHT TYPE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

G. TWO ELECTRIC HAND LANTERNS, FIRE DEPARTMENT TYPE, UTILIZING 6 VOLT LANTERN TYPE DRY CELLS, MINIMUM 4 1/2 INCH DIAMETER REFLECTOR. ALKALINE BATTERY IS REQUIRED, THE BATTERY CASE AND LAMP SHALL BE WATER AND RUSTPROOFED WITH BRACKET.*

H. ONE SIX POUND FLATHEAD AXE, WITH FIBERGLASS HANDLE, SECURED IN CHROME PLATED MOUNTINGS.*

I. ONE SIX POUND PICKHEAD AXE, WITH FIBERGLASS HANDLE, SECURED IN CHROME PLATED MOUNTINGS.*

J. ONE 60 INCH STEEL CROWBAR, SECURED IN CHROME PLATED MOUNTING.*

K. ONE 36 INCH HOOLIGAN TOOL, SECURED IN CHROME PLATED MOUNTING.*

L. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A 24 FOOT, TWO SECTION ALUMINUM FIRE DEPARTMENT TYPE LADDER, SHALL BE PROVIDED AND MOUNTED, RIGHT SIDE.

M. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A 14 FOOT ALUMINUM FIRE DEPARTMENT TYPE ROOF LADDER, WITH FOLDING HOOKS, SHALL BE FURNISHED AND MOUNTED OUTSIDE OF 24-FOOT LADDER.

N. UNLESS OTHERWISE SPECIFIED (SEE 6.1), A 10 FOOT FOLDING ALUMINUM ATTIC LADDER SHALL BE FURNISHED, MOUNTED BELOW 24 FOOT LADDER.

O. UNLESS OTHERWISE SPECIFIED (SEE 6.1), 1,500 FEET OF DOUBLE JACKETED POLYESTER 2 1/2 INCH FIRE HOSE IN 50 FOOT LENGTHS, COUPLED BY LIGHT WEIGHT FORGED COUPLINGS, AND 600 PSI TEST.

P. UNLESS OTHERWISE SPECIFIED (SEE 6.1), 400 FEET OF DOUBLE JACKETED COTTON-POLYESTER 1 1/2 INCH FIRE HOSE IN 50 FOOT LENGTHS, COUPLED BY LIGHT WEIGHT FORGED COUPLINGS, AND 600 P.S.I TEST.

Q. TWO 1 1/2 INCH SHUTOFF NOZZLES CAPABLE OF DISCHARGING A MINIMUM OF 100 GPM IN BOTH A SPRAY AND STRAIGHT STREAM,WITH MOUNTING PLATES.*

R. TWO 2 1/2 INCH SHUTOFF NOZZLES CAPABLE OF A MINIMUM OF 250 GALLONS IN BOTH A SPRAY AND STRAIGHT STREAM, WITH MOUNTING PLATES.*

S. WHEN SPECIFIED 45° ANGLE ELBOWS SHALL BE FURNISHED FOR EACH SIDE DISCHARGE.

* ALL SHALL BE MOUNTED BY THE DELIVERY ENGINEER AT TIME OF DELIVERY.

3.26 NAME AND CAUTION PLATES. MANUFACTURER'S STANDARD PRODUCTION DATA, CAUTION AND INSTRUCTION PLATES FOR BOTH CHASSIS AND FIRE APPARATUS SHALL BE FURNISHED. FOR CHASSIS DETAIL, SEE PARAGRAPH 3.5.2.

3.27 PREPARATION FOR PAINTING. ALL CHASSIS AND BODY SURFACES CONCEALED OR EXPOSED, EXCEPT POLISHED METAL PARTS THAT ARE CORROSION-RESISTANT OR PLATED, SHALL BE CLEANED, TREATED, AND COATED WITH A FIRM PRIMER AND PAINTED BEFORE ASSEMBLY FOR QUALITY PROTECTION. SUBSEQUENT PRESERVATIVES OR FINISHES SHALL BE INDUSTRY'S STANDARD PRACTICE.

3.27.1 PAINT FINISH AND COLOR. UNLESS OTHERWISE SPECIFIED (SEE 6.1), THE EXTERIOR COLOR SHALL MATCH THE COLOR CHIP OF PAINT NUMBER 13670 LIME YELLOW WITH 17875 WHITE ROOF OF FEDERAL STANDARD 595A ON CAB FROM BOTTOM OF WINDOWS UP. THE INTERIOR FINISH COLOR SHALL BE THE SAME COLOR AS THE EXTERIOR OR A COMPATIBLE CONTRASTING COLOR. EXTERIOR PAINT SHALL BE POLYURETHANE TYPE.

3.28 WORKMANSHIP. VEHICLES SHALL BE FREE FROM DEFECTS WHICH MAY IMPAIR THEIR SERVICEABILITY OR DETRACT FROM THEIR APPEARANCE.

3.29 RUSTPROOFING. THE UNIT SHALL BE COMPLETELY RUSTPROOFED IN ACCORDANCE WITH MIL-STD 1223, BODY, CAB, FRAME, WHEELWELLS, INSIDE OF ALL DOORS (CAB AND COMPARTMENT) AND ALL EXPOSED UNDER SIDE OF BODY, INCLUDING ALL ALUMINUM.

4. QUALITY ASSURANCE PROVISIONS

4.1 RESPONSIBILITY FOR INSPECTION. UNLESS OTHERWISE SPECIFIED (SEE 6.1), IN THE CONTRACT OR PURCHASE ORDER, THE SUPPLIER IS RESPONSIBLE FOR THE PERFORMANCE OF ALL INSPECTION REQUIREMENTS AS SPECIFIED HEREIN. EXCEPT AS OTHERWISE SPECIFIED IN THE CONTRACT OR ORDER, THE SUPPLIER MAY USE HIS OWN OR ANY OTHER FACILITIES SUITABLE FOR THE PERFORMANCE OF THE INSPECTION REQUIREMENTS SPECIFIED HEREIN, UNLESS DISAPPROVED BY THE GOVERNMENT. THE GOVERNMENT RESERVES THE RIGHT TO PERFORM ANY OF THE INSPECTIONS SET FORTH IN THE SPECIFICATION WHERE SUCH INSPECTIONS ARE DEEMED NECESSARY TO ASSURE THAT SUPPLIES AND SERVICES CONFORM TO PRESCRIBED REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

4.2 A REPRESENTATIVE OF UNDERWRITERS LABORATORIES INC. SHALL CONDUCT THE UL CERTIFICATION TEST PER N.F.P.A 1901, (11-2-.2) BEFORE FINAL INSPECTIONS BY THE GOVERNMENT. ALL UL TEST DOCUMENTS (11-2.2, 11-2.3) SHALL BE FURNISHED TO THE ORDERING AGENCY AT TIME OF DELIVERY WITH A COPY GOING TO THE GOVERNMENT QUALITY ASSURANCE SPECIALIST AT TIME OF INSPECTION.

QUALITY ASSURANCE SPECIALIST SHALL CONDUCT TESTS PER N.F.P.A. 1901 PARTS 12-1.2.1. 11-2.2,11-1.2.4 AND PER KKK 1964A PARTS 3.8.1 A AND B.

THE CONTRACTOR SHALL HAVE A APPLICABLE COPY OF N.F.P.A. 1901 FOR USE BY THE QUALITY ASSURANCE SPECIALIST AT TIME OF INSPECTION.

5. PREPARATION FOR DELIVERY

5.1 PREPARATION. UNLESS OTHERWISE SPECIFIED (SEE 6.1). THE TRUCK(S) SHALL BE PRESERVED AND PACKAGED FOR MOBILE DELIVERY IN ACCORDANCE WITH THE SUPPLIER'S STANDARD COMMERCIAL PRACTICE, INSURING CARRIER ACCEPTANCE AND SAFE DELIVERY TO DESTINATION IN COMPLIANCE WITH REGULATIONS APPLICABLE TO THE MODE OF TRANSPORTATION.

6. NOTES

6.1 ORDERING DATA. PURCHASER SHOULD SELECT THE PREFERRED OPTIONS PERMITTED HEREIN AND INCLUDE THE FOLLOWING INFORMATION IN PROCUREMENT DOCUMENT.

A. TITLE, NUMBER, AND DATE OF THIS SPECIFICATION.

B. TYPE OF CAB, SIZE OF VEHICLE, PUMPING CAPACITY AND TANK CAPACITY (SEE 1.2).

C. SPECIAL EQUIPMENT REQUIRED IF OTHER THAN SPECIFIED (SEE 3.3.1).

D. GROSS VEHICLE WEIGHT RATING (G.V.W.R.) (SEE 3.5.1.1).

E. DIMENSIONS OF VEHICLE, CA OR WHEELBASE, ETC. IF REQUIRED (SEE 3.5.3 AND 3.5.3.1).

F. FRAME REINFORCEMENT IF REQUIRED (SEE 3.6.1).

G. POWER UNIT, STATE TYPE AND/OR SPECIAL REQUIREMENTS POWER (SEE 3.7.2 AND 3.7.3).

H. SPEED AND GRADEABILITY, SPECIFY IF DIFFERENT (SEE 3.8.1).

I. AIR FILTER, IF OTHER THAN SPECIFIED (SEE 3.11).

J. FUEL TANKS, SPECIFY CAPACITY AND STYLE REQUIRED (SEE 3.13).

K. SHUTTERS, IF REQUIRED (SEE 3.14.2).

L. POWER TAKEOFF OPENING IF OTHER THAN S.A.E. P.T.O. OPENING IS REQUIRED (SEE 3.16.2).

M. TRANSMISSION, SPECIFY NUMBER OF SPEEDS (SEE 3.16.2.1).

N. AUTOMATIC TRANSMISSION IF REQUIRED (SEE 3.16.2.2).

O. TRANSFER CASE AND DRIVE HUBS IF REQUIRED (SEE 3.16.2.3).

P. AXLE CAPACITIES, WHEN REQUIRED (SEE 3.16.4).

Q. TWO SPEED REAR AXLES, WHEN REQUIRED (SEE 3.16.4.1).

R. DIFFERENTIAL, SPECIAL TRACTION TYPE IF REQUIRED (SEE 3.16.5).

S. WHEEL AND RIMS, IF OTHER THAN SPECIFIED (SEE 3.18.1).

T. TIRES, IF OTHER THAN SPECIFIED (SEE 3.18.2).

U. SPARE WHEEL AND TIRE, SPECIFY IF REQUIRED AND IF SPECIAL MOUNTING IS REQUIRED (SEE 3.18.4 AND 3.18.4.1).

V. AIR BRAKES, IF OTHER THAN SPECIFIED (SEE 3.19.1.2 AND 3.19.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

W. BATTERY, IF OTHER THAN SPECIFIED (SEE 3.21.2 AND 3.21.2.1).

X. ALTERNATOR, IF OTHER THAN SPECIFIED (SEE 3.21.3).

Z. CABS, SPECIFY TYPE (SEE 3.23.4.1, 3.23.4.2, 3.23.4.3, 3.23.4.4 AND 3.23.4.5 AND 3.23.4.7).

AA. GLASS, TINTED IF REQUIRED (SEE 3.23.6).

BB. INSTRUMENTS, IF OTHER THAN SPECIFIED (SEE 3.23.7).

CC. ACCESSORIES IF OTHER THAN SPECIFIED (SEE 3.23.8).

DD. HEATER AND DEFROSTER, IF OTHER THAN SPECIFIED (SEE 3.23.8.3).

EE. TOOLS, WHEN SPECIFIED (SEE 3.24).

FF. BODY, IF OTHER THAN SPECIFIED (SEE 3.25.1).

GG. PUMP HOUSING AND STOWAGE BIN, IF OTHER THAN SPECIFIED (SEE 3.25.2).

HH. FIRE HOSE COMPARTMENT, IF OTHER THAN SPECIFIED (SEE 3.25.3).

II. EQUIPMENT COMPARTMENTS, IF OTHER THAN SPECIFIED (SEE 3.25.4).

JJ. RUNNING BOARDS AND REAR PLATFORM, IF OTHER THAN SPECIFIED (SEE 3.25.5).

KK. HANDRAILS, IF OTHER THAN SPECIFIED (SEE 3.25.7).

LL. BOOSTER TANK, SPECIFY CAPACITY AND IF OTHER THAN REQUIRED (SEE 3.25.7).

MM. FIRE PUMP SPECIFY RATED CAPACITY, IF OTHER THAN REQUIRED AND IF PUMP AND ROLL (SEE 3.25.9).

NN. PRESSURE RELIEF VALVE, TYPE AS SPECIFIED (SEE 3.25.11).

OO. TRANSFER VALVE, TYPE AS SPECIFIED (SEE 3.25.12).

PP. AUXILIARY COOLING SYSTEM, IF OTHER THAN SPECIFIED (SEE 3.25.13).

QQ. SUCTION INLET, IF OTHER THAN SPECIFIED (SEE 3.25.14).

RR. DISCHARGE OUTLET, SPECIFY NUMBER AND SIZE (SEE 3.25.15).

SS. PUMP EQUIPMENT, SPECIFY SIZE AND THREADS (SEE 3.25.16).

TT. HOSE REEL, IF OTHER THAN SPECIFIED (SEE 3.25.17).

UU. OPERATOR'S CONTROL PANEL, IF OTHER THAN SPECIFIED (SEE 3.25.18).

VV. ELECTRICAL EQUIPMENT, IF OTHER THAN SPECIFIED (SEE 3.25.19).

WW. COMMUNICATIONS (SEE 3.25.20).

XX. SIREN, IF OTHER THAN SPECIFIED (SEE 3.25.21).

YY. ACCESSORIES, SPECIFY IF DIFFERENT (SEE 3.25.22).

ZZ. PAINT, IF OTHER THAN SPECIFIED (SEE 3.27.1).

AAA. SPECIAL REQUIREMENTS AS DICTATED BY INTENDED USE (SEE 6.4).

BBB. INSPECTION, IF DIFFERENT THAN SPECIFIED (SEE 4.1).

CCC. PREPARATION AND DELIVERY, SPECIFY IF DIFFERENT (SEE 5.1).

DDD. ILLUSTRATIONS AND DRAWINGS, IF OTHER THAN SPECIFIED (SEE 6.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

EEE. TRUCK ABILITY PREDICTION PROCEDURE, SAE FORM J688 MAY BE OMITTED WHEN SO INDICATED IN CONTRACT (SEE 6.2).

FFF. MANUALS, IF OTHER THAN SPECIFIED (SEE 6.3.5).

GGG. DRIVEAWAY DELIVERY, IF REQUIRED (SEE 6.3.8).

6.2 PERFORMANCE PREDICTION. COMPLETE COPIES OF SAE J688 TRUCK ABILITY PREDICTION PROCEDURE FORM AND COMPUTATION FOR HIGH AND LOW SPEED REQUIREMENTS OR AN EQUIVALENT COMPUTER SIMULATION FOR EACH VEHICLE MODEL FURNISHED UNDER CONTRACT SHALL BE SUBMITTED WITH THE REQUIRED DRAWINGS, UNLESS OTHERWISE SPECIFIED (SEE 6.1). THE SAE WORK SHEET ITEM 1 SHOULD INCLUDE VEHICLE MODEL NUMBER, WHEELBASE, ENGINE MODEL NUMBER, AND VEHICLE TYPE. UNLESS OTHER CONDITIONS ARE CITED IN THE CONTRACT, COMPUTATIONS SHOULD BE MADE FOR NORMAL ATMOSPHERIC PRESSURE, NORMAL AMBIENT AIR TEMPERATURE, AND STILL, DRY AIR. THE FACTORS, TO BE USED IN PREDICTING TRUCK ABILITY (SEE 3.8.3) ARE ESTABLISHED AS FOLLOWS FOR THE CORRESPONDING SAE TRUCK ABILITY PREDICTION PROCEDURE TABLES:

TABLE 1. TIRE FACTORS RELATES TO THE SIZE OF TIRES FURNISHED BY THE CONTRACTOR IN ACCORDANCE WITH THIS SPECIFICATION.

TABLE 2. ALTITUDE FACTOR - 1.00.

TABLE 3. ROLLING FACTOR - 1.613.

TABLE 4. AREA FACTOR - USE ACTUAL FRONTAL AREA OF FIRE ENGINE PRESENTED BY THE CHASSIS AND WITH BODY MOUNTED.

TABLE 5. VELOCITY FACTOR - 250.0.

TABLE 6. ALTITUDE FACTOR - 1.00.

TABLE 7. CHASSIS FRICTION HORSEPOWER - USE APPLICABLE POWER UNIT G.V.W. (TO NEAREST, HIGHER 1,000 POUNDS) AND THE ENGINE R.P.M. (TO NEAREST 100 REVOLUTIONS) WHICH IS REQUIRED FOR 50 M.P.H. GEARED SPEED. FOR G.V.W. AND ENGINE SPEED BEYOND THE RANGE OF THIS TABLE, FACTORS SHALL BE EXTRAPOLATED.

TABLE 8. GRADE FACTOR - 0.75.

TABLE 8A. CORRECTION FACTOR - NOT REQUIRED.

TABLE 9. ROAD FACTOR - 0.0.

6.3. PROCUREMENT REQUIREMENTS. INVITATION FOR BIDS, CONTRACT, OR ORDERS SHALL CONTAIN THE FOLLOWING REQUIREMENTS (SEE 6.3.1 THROUGH 6.5).

6.3.1 DOMESTIC WARRANTY. THE CONTRACTOR, ON VEHICLES USED WITHIN THE FIFTY STATES OF THE UNITED STATES AND THE DISTRICT OF COLUMBIA, HEREBY WARRANTS VEHICLE TO BE FREE FROM DEFECTIVE MATERIAL AND WORKMANSHIP AS FOLLOWS:

THE ENTIRE VEHICLE (EXCEPT TIRES AND TUBES, IF WARRANTED BY THEIR MANUFACTURERS AND NORMAL MAINTENANCE SERVICES) SHALL BE WARRANTED FOR ONE YEAR FROM DATE OF ACCEPTANCE OR 12,000 MILES ROAD TRAVEL WHICHEVER MAY OCCUR FIRST. ENGINE AND POWER TRAIN COMPONENTS (AS COVERED BY THE VEHICLE MANUFACTURER'S STANDARD WARRANTY TO THE GENERAL PUBLIC FOR THE CURRENT YEAR OF MANUFACTURE), SHALL BE WARRANTED AT 50 PERCENT OF THE NORMAL CHARGE FOR PARTS AND LABOR IMPOSED BY THE DEALER OR OTHER AUTHORIZED FACILITY FROM 12,001 OR 50,000 MILES PROVIDED THIS OCCURS WITHIN THE ORIGINAL 12 MONTHS. PROVIDED, HOWEVER, THAT IF THE CONTRACTOR RECEIVES FROM ANY SUPPLIER OR SUBCONTRACTOR ANY ADDITIONAL WARRANTY ON THE WHOLE OR ANY COMPONENT OF THE VEHICLE, EITHER IN THE FORM OF GREATER TIME AND/OR MILEAGE OR OTHERWISE AND INCLUDING ANY PRO-RATA TYPE ARRANGEMENT, OR IF THE CONTRACTOR GENERALLY EXTENDS TO HIS COMMERCIAL CUSTOMERS A GREATER WARRANTY COVERAGE THAN THAT PROVIDED THE GOVERNMENT UNDER THIS CONTRACT, THE GOVERNMENT SHALL RECEIVE CORRESPONDING WARRANTY BENEFITS, (TO START AT DATE OF ACCEPTANCE INCLUDING THE CAB AND CHASSIS).

THE WARRANTY SHALL INCLUDE THE FURNISHING (WITHOUT COST TO THE GOVERNMENT, F.O.B. CONTRACTOR'S NEAREST DEALER OR BRANCH, OR TO THE ORIGINAL DESTINATION IF DESIRED BY THE GOVERNMENT), OF NEW PARTS AND ASSEMBLIES TO REPLACE ANY THAT PROVE TO BE DEFECTIVE WITHIN THE WARRANTY PERIOD. IN ADDITION, WHEN THE GOVERNMENT ELECTS TO HAVE THE WORK PERFORMED BY THE CONTRACTOR, THE COST OF THE LABOR INVOLVED IN THE REPLACEMENT OF THE DEFECTIVE PARTS OR ASSEMBLIES AT THE CONTRACTOR'S PLANT, BRANCH, OR DEALER FACILITY SHALL BE BORNE BY THE CONTRACTOR. ON VEHICLES PROCURED F.O.B. DESTINATION AND DELIVERED BY THE DRIVEAWAY DELIVERY METHOD, WHEN AUTHORIZED BY THE GOVERNMENT, WARRANTY LIMITATION WILL BE IN ADDITION TO THE MILEAGE ACCUMULATED BY SUCH DRIVEAWAY METHOD.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:46Z
Check the source to verify that this is the current version before use.

6.3.2 EXPORT WARRANTY. THE CONTRACTOR, ON VEHICLES USED OUTSIDE THE FIFTY STATES OF THE UNITED STATES AND THE DISTRICT OF COLUMBIA, WARRANTS THE ENTIRE VEHICLE (EXCEPT TIRES AND NORMAL MAINTENANCE SERVICES) TO BE FREE FROM DEFECTIVE MATERIAL AND WORKMANSHIP, FOR ONE YEAR FROM DATE OF ACCEPTANCE OR 12,000 MILES ROAD TRAVEL, WHICHEVER MAY OCCUR FIRST. ON VEHICLES DELIVERED TO THE GOVERNMENT BY DRIVE-AWAY METHOD, THE 12,000 MILES WARRANTY LIMITATION WILL BE IN ADDITION TO THE MILEAGE ACCUMULATED BY SUCH DRIVEAWAY METHOD. THIS WARRANTY SHALL ONLY INCLUDE THE FURNISHING OF NEW PARTS OR ASSEMBLIES TO REPLACE ANY RETURNED TO THE CONTRACTOR BY GOVERNMENT WHICH PROVE TO BE DEFECTIVE. THE REPLACEMENT PARTS OR ASSEMBLIES SHALL BE DELIVERED BY THE CONTRACTOR TO THE PORT OF EMBARKATION IN THE UNITED STATES DESIGNATED BY THE GOVERNMENT. THE CONTRACTOR SHALL NOT BE REQUIRED TO BEAR THE COST OF THE LABOR INVOLVED IN CORRECTING DEFECTS IN VEHICLES USED OUTSIDE THE FIFTY STATES OF UNITED STATES AND THE DISTRICT OF COLUMBIA.

6.3.3 ILLUSTRATIONS AND DRAWINGS. FOUR COMPLETE SETS OF WORKING DRAWINGS OF THE PROPOSED VEHICLES(S) SHALL BE SUPPLIED WITHIN 45 DAYS AFTER RECEIPT OF NOTICE BY THE SUCCESSFUL BIDDER, FOR THE APPROVAL OF THE ORDERING AGENCY. DRAWINGS SHALL INCLUDE PLANS, ELEVATIONS, SECTIONS AND DETAIL DRAWINGS. ALL MATERIAL, EQUIPMENT AND APPARATUS SHOWN IN THE DRAWINGS SHALL BE CONSIDERED PART OF THE OFFER AND SHALL BECOME PART OF THE CONTRACT.

6.3.4 REPAIR PARTS AND SERVICE. AS A CONTINUOUS OPERATION OF THE VEHICLES CONTEMPLATED BY THIS SPECIFICATION IS OF UTMOST IMPORTANCE, IT IS NECESSARY THAT THE SUCCESSFUL BIDDER BE IN A POSITION TO RENDER PROMPT SERVICE AND TO FURNISH REPLACEMENT PARTS. ACCORDINGLY BIDDERS SHALL INDICATE THE EXTENT OF THEIR ABILITY TO RENDER PROMPT SERVICE BY FURNISHING, UPON REQUEST, A LIST OF BRANCH OFFICES OR AGENCIES WHERE COMPLETE STOCKS OF REPAIR PARTS ARE MAINTAINED AND CAN BE SECURED WITHIN A REASONABLE TIME AFTER ORDERING BY PART NUMBER FROM THE MANUFACTURER'S PARTS BOOK AND AT SUCH DISCOUNT AS MAY BE QUOTED FROM YEAR TO YEAR BY THE MANUFACTURER OF THE VEHICLE PURCHASED UNDER THIS SPECIFICATION.

6.3.5 MANUALS, OPERATING AND SERVICING. THE SUCCESSFUL BIDDER SHALL FURNISH TWO OPERATOR'S HANDBOOKS AND TWO LUBRICATION CHARTS, IF THE CHARTS ARE NOT IN THE HANDBOOKS, WITH EACH VEHICLE. WHEN SPECIFIED, TWO SPARE PARTS LISTS OR BOOKS AND SHOP REPAIR MANUALS FOR VEHICLE AND FURNISHED EQUIPMENT SHALL BE FURNISHED WITH EACH VEHICLE (SEE 6.1).

6.3.6 LOADING. WHEN SHIPMENT IS TO BE MADE BY RAIL, WATER, OR TRUCK, THE VEHICLE SHALL BE PREPARED AND LOADED FOR SHIPMENT IN ACCORDANCE WITH THE BEST COMMERCIAL PRACTICE. WHEN SHIPMENT IS TO BE MADE BY RAIL ON GOVERNMENT BILL OF LADING, FREIGHT CARS SHALL BE LOADED SO THAT THE GOVERNMENT WILL OBTAIN THE MOST ADVANTAGEOUS FREIGHT RATE.

6.3.7 SERVICING PRIOR TO LOADING. SERVICING PRIOR TO LOADING SHALL BE IN ACCORDANCE WITH GSA FORM 1455, MOTOR VEHICLE PRESHIPMENT INSPECTION AND SERVICING REQUIREMENTS. UNLESS SHIPPING REGULATIONS PROHIBIT, THE CRANKCASE SHALL BE FILLED TO THE OPERATING LEVEL WITH HIGH QUALITY LUBRICATING OIL OF THE CORRECT VISCOSITY FOR THE "RUN-IN" PERIOD AS RECOMMENDED BY THE ENGINE MANUFACTURER. IN ADDITION, THE FUEL TANK SHALL BE FILLED WITH 10 GALLONS OF FUEL, AND THE COOLING SYSTEM SHALL BE FILLED WITH A 50 260% MIXTURE OF WATER AND ETHYLENE GLYCOL ANTIFREEZE (THAT WILL ALSO PROTECT ALUMINUM BLOCKS) IN PROPER PROPORTIONS TO VEHICLES WHICH ARE SHIPPED WITH DRAINED CRANKCASE, HALF-FILLED TRANSMISSION, SHALL HAVE A WARNING CLEARLY INDICATED ON TAG, SECURELY ATTACHED TO THE STEERING WHEEL OR CLEARLY MARKED ON THE WINDSHIELD THAT THE CRANKCASE, AND TRANSMISSION, MUST BE FILLED PRIOR TO RUNNING THE ENGINE.

6.3.8 SERVICING FOR DRIVEAWAY DELIVERY. WHEN DRIVEAWAY BY GOVERNMENT PERSONNEL IS SPECIFIED IN THE INVITATION FOR BID (SEE 6.1), THE CONTRACTOR SHALL PERFORM ALL THE SERVICING OPERATIONS SPECIFIED IN 6.3.7.

6.4 INTENDED USE. PURCHASERS SHOULD OUTLINE CLEARLY THE CONDITIONS UNDER WHICH THE VEHICLES REQUIRED WILL OPERATE, AND DESCRIBING THE PERFORMANCE AND ABILITY NECESSARY. ANY UNUSUAL OPERATING CONDITIONS THAT WOULD JUSTIFY DEVIATIONS FROM STANDARD CONSTRUCTION AS REQUIRED BY THIS SPECIFICATION SHOULD ALSO BE SPECIFICALLY DESCRIBED.

6.5 STATEMENT OF ORIGIN OR BILL OF SALE. A MANUFACTURER'S STATEMENT OF ORIGIN OR BILL OF SALE SHOWING THE APPLICABLE DELIVERY ORDER NUMBER IS REQUIRED FOR EACH VEHICLE PROCURED UNDER THIS SPECIFICATION. UNLESS OTHERWISE SPECIFIED, SUCH DOCUMENTS SHALL BE FORWARDED TO THE CONSIGNEE.

6.6 INSTRUCTIONS. UNLESS OTHERWISE SPECIFIED THE CONTRACTOR SHALL PROVIDE A QUALIFIED TECHNICAL REPRESENTATIVE TO BE PRESENT AT TIME OF DELIVERY OF THE FIRETRUCK. THE REPRESENTATIVE OR DELIVERY ENGINEER SHALL REMAIN FOR A PERIOD OF TWO DAYS FOR THE PURPOSE OF INSTRUCTING FIRE DEPARTMENT AND MAINTENANCE PERSONNEL IN THE OPERATION AND MAINTENANCE OF THE APPARATUS, (SEE 6.1). DURING THIS TIME THE PUMP SHALL BE TESTED PER N.F.P.A. 1901, 11-2.2.1 FOR 10 MIN AT 100% AT 150 PSI AND FOR 10 MIN AT 50% AT 250 PSI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

6.7 PREPRODUCTION CONFERENCE. WHEN REQUESTED BY THE CONTRACTING OFFICER, A MEETING OF THE CONTRACTOR, CONTRACTING OFFICER, A REPRESENTATIVE OF THE ORDERING AGENCY AND THE SPECIFICATION MANAGER SHALL BE HELD PRIOR TO THE START OF CONSTRUCTION OF THE FIRE ENGINE(S).

CUSTODIANS:
GSA-FSS

PREPARING ACTIVITY
GSA-FSS-FAE

COORDINATING ACTIVITIES

MILITARY

CIVIL AGENCIES:

DOT - COAST GUARD
INTERIOR - BIA - NPS
U.S. ERDA- ERDA
VA- VA (134)

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595/5211

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

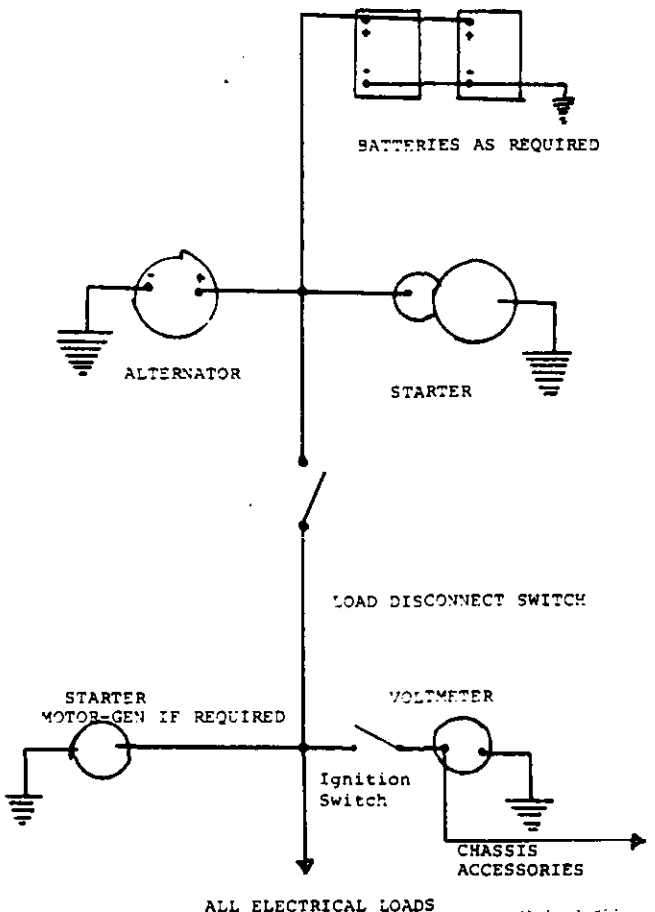


FIGURE 1

Source: https://assist.dla.mil - Downloaded: 202640-26T12:46Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, fold, staple, and mail. to GSA-FSS-FAE, CMBg. #4, Rm. 420, Wash., DC 20406.
NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION
KKK-F-1964A - Firetruck (Pumper), Gasoline or Diesel Engine, (4x2, 4x4, 6x4) 20,000 Pounds GVW & Over.

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

GSA DC 69-9761

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.