FEDERAL SPECIFICATION

FIRETRUCK, WILDLAND, 4x2, 4x4, GASOLINE OR DIESEL ENGINE, 8,700 POUND TO 27,500 POUND GVWR

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND COVERAGE.

1.1 Scope. This specification covers gasoline and diesel engine driven, four wheel, two rear wheel drive, 4x2, and four wheel, two front and two rear wheel drive, 4x4, firetruck of the types shown in Tables 1 and 2. Vehicles procured under this specification are intended to be used in wildland (off-road) fire suppression. Pumpers over 20,000 lbs. are covered by KKK-F-1964A; 11,000 to 20,000 lbs. are covered by KKK-F-2115.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are available, but are intended to cover only those generally used by the Federal Government.

1.2 Coverage of truck. The vehicles covered by this specification are listed below. To order, select the Item Number from the applicable Table 1 or 2. The "Schedule" for additional options appears on table 3 (see page 26).

Item Number	Vehicle Type	GVWR	Table Number	Page Number
921	Pickup, 2 door, 4x2	8,700	1	18
922	Pickup, 4 door, 4x2	9,000	1	18
923	Pickup, 2 door, 4x2	10,000	1	18
924	Pickup, 4 door, 4x2	10,000	1	18
925	Pickup, 2 door, 4x4	9,200	2	22
926	Pickup, 4 door, 4x4	9,200	2	22
927	Pickup, 2 door, 4x4	10,000	2	22
928	Pickup, 4 door, 4x4	10,000	2	22
931	Chassis, 2 door, 4x2	10,500	1	19
932	Chassis, 4 door, 4x2	10,000	1	19
933	Chassis, 2 door, 4x2	16,000	1	19
934	Chassis, 4 door, 4x2	16,000	1	19
935	Chassis, 2 door, 4x2	20,000	1	20
936	Chassis, 4 door, 4x2	20,000	1	20
937	Chassis, 2 door, 4x2	26,000	1	20
938	Chassis, 4 door, 4x2	26,000	1	20
941	Chassis, 2 door, 4x4	11,000	2	23
942	Chassis, 4 door, 4x4	11,000	2	23
943	Chassis, 2 door, 4x4	13,700	2	23
944	Chassis, 2 door, 4x4	16,000	2	23
945	Chassis, 4 door, 4x4	16,000	2	24
946	Chassis, 2 door, 4x4	21,000	2	24
947	Chassis, 4 door, 4x4	21,000	2	24
948	Chassis, 2 door, 4x4	27,500	2	24
949	Chassis, 4 door, 4x4	27,500	2	25
961	Chassis, 2 door, 4x2	32,000	1	21
962	Chassis, 4 door, 4x2	32,000	1	21
963	Chassis, 2 door, 4x4	32,000	2	25
964	Chassis, 4 door, 4x4	32,000	2	25

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

Federal Standard:

Fed. Std. No. 595 - Colors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

Federal Specification:

Federal Specification No. KKK-F-1964 - Firetruck, Pumper.
Federal Specification No. KKK-F-2115 - Firetruck, Pumper.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402).

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge, from Business Service Centers at the General Service Administration Regional Offices in Boston, New York, Philadelphia, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Houston, Denver, San Francisco, Los Angeles, and Seattle).

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies).

Laws and Regulations:

40 CFR 85 - Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines
40 CFR 205 - EPA Transportation Equipment Noise Emission Control
49 CFR 393.60 - Glazing and window construction
49 CFR 393.65 - All fuel systems
49 CFR 393.67 - Liquid fuel tanks
49 CFR 393.94 - Vehicle Interior Noise Levels
49 CFR 571. - Federal Motor Vehicle Safety Standards

(The Code of Federal Regulations (CFR) and Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal Agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

State of California, Vehicle Emissions Standards:

(Application for copies should be addressed to the California Air Resource Board, 1709 24th Street, Sacramento, California 95809.)

Tire and Rim Association Yearbook:

(Copies may be obtained from the Tire and Rim Association, Inc., 3200 West Market Street, Akron, Ohio 44313.)

Society of Automotive Engineers (SAE), Inc., Standards and Recommended Practices:

J-163 - Low Tension Wiring and Cable Terminal And Splice Clips
J-245 - Engine Rating Code, Spark Ignition
J-551 - Measurement of Electromagnetic Radiation from Motor Vehicles (20-1000MHZ)
J-552 - External Electromagnetic Radiation Suppressors
J-553 - Circuit Breakers
J-561 - Electrical Terminals
J-683 - Tire Chain Clearance
J-704 - Side Openings For Truck Power Take-Off
J-816 - Engine Test Code, Spark Ignition and Diesel
J-928 - Electrical Terminals
J-992b - Brake System Performance Requirements
J-1128 - Low Tension Primary Cable.

(Copies may be obtained from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, Pennsylvania 15096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

National Fire Protection Association Standard:

No. 1901 - Automotive Fire Apparatus

(Application for copies should be addressed to the National Fire Protection Association, 470 Atlantic Avenue, Boston, Massachusetts 02210)

3. REQUIREMENTS

3.1 Design. The fire apparatus furnished under this specification shall be basically the manufacturer's current design for the type specified. The vehicle and allied equipment specified shall be complete with all necessary operating accessories customarily furnished together with such modifications and attachments as may be necessary to enable the vehicle to function reliably and efficiently in sustained operation. The design of the vehicle and optional equipment shall permit ready accessibility for servicing, replacement, and adjustment of component parts and accessories with minimum disturbance of other components and systems. The apparatus shall be constructed with due consideration to the nature and distribution of the load to be sustained, and to the service to which the apparatus is to be subjected when placed in service. All design, operational and material features must fully comply with applicable Standards as stated in 40 CFR 85, 40 CFR 205, and 49 CFR 571, including additional pertinent acts, amendments, and standards in effect at time of bidding, whether or not specifically referenced herein.

3.2 Materials. The materials shall be new with quality conforming to the best current engineering and manufacturing practices. Materials shall be free of defects, suitable for the intended service. Virgin materials are not required and recovered materials are not excluded in manufacturing.

3.3 Vehicle equipment and accessories. The vehicle components, assemblies, and accessories to be delivered under the contract shall be new and shall meet or exceed the requirements of this specification. They shall comply with all Environmental Protection Agency Regulations, Federal Motor Vehicle Safety Standards and Federal Motor Carrier Safety Regulations applicable to the specified vehicle on the date of manufacture. All chassis items shall be as represented in the manufacturer's current technical data, and special bodies or mounted equipment shall be as represented in the body and equipment manufacturer's current technical data. Technical data shall be limited to specifications and technical material, identical to that furnished to the authorized company representatives for selection of vehicle models and components, or on file by the company as being engineered for the particular application, prior to award of contract for a vehicle. The component parts of the vehicle need not be the products of the same manufacturer.

3.3.1 Special equipment. In addition to the standard vehicle and components required herein, each vehicle shall be furnished when required by the solicitation, with special equipment as specified therein.

3.4 Vehicle lubrication. The vehicle, chassis components, and equipment shall be fully equipped with accessible lubrication fittings in accordance with the manufacturer's standard practice.

3.5 Vehicle weight, rating and dimension.

3.5.1 Curb weight. Curb weight shall include weight of chassis and cab with all chassis attachments, accessories, equipment, and body, including a full complement of fuel, lubricant, and coolant.

3.5.1.1 Gross vehicle weight. Gross vehicle weight rating, (G.V.W.R.) shall not be less than specified (see Table No. 1 or 2).

3.5.1.2 Payload. Shall be as specified in Table No. 1 or 2 (Note: With this payload, the GVW will be 10 to 15% below the GVWR for off-road.)

3.5.2 Ratings. Vehicular ratings, as published in the manufacturer's current technical data, may be raised to meet the requirements of this specification, provided the rated capacity of each component is not raised over the manufacturer rating for the components. Manufacturers shall provide a G.V.W.R. plate showing actual G.V.W.R. of the vehicle furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.5.3 Dimensions. Cab to axle (CA) dimension shall be as specified in table no. 1 or 2.

3.5.3.1 Unless otherwise specified or required by stated CA dimension, wheelbase shall be manufacturer's standard type of vehicle offered.

3.6 Frame. The frame shall be capable of withstanding the strain of rigorous service and shall be provided with adequate crossmembers so designed and constructed to support the gross weight of the vehicle with its load, personnel, power plant and all specified equipment. The frame, as supplied by the chassis manufacturer shall not be altered, either to be increased or decreased in length other than to remove excess length of frame, rails behind the rear spring hangers, which will not affect the original wheelbase.

3.6.1 Frame reinforcement. The minimum resisting bending moments shall be as specified (see table no. 1 or 2), the frame design and material shall be capable of withstanding the maximum stress imposed under extreme conditions. This may be accomplished by increasing resistance to bending moment through reinforcement of frame channels, use of deeper section to provide increased section modulus, or use of higher tensile strength steel frame rails.

3.7 Power unit, gasoline or diesel.

3.7.1 Power unit. Power unit furnished for the specified vehicle shall be the chassis manufacturer's standard or, optional, commercially available engine for the model truck which meets or exceeds the requirements, per table no. 1 or 2, at not more than engine manufacturer's recommended engine speed. It shall be of such design and construction that it will give an even flow of power at all r.p.m. without undue vibration, strain, or overheating of engine parts.

3.7.1.1 Engine starting. The engine, gasoline or diesel, shall start satisfactorily without devices that are not self-contained on the vehicle at temperatures down to 0°F The vehicle manufacturer shall incorporate sufficient battery capacity to satisfy this requirement. Auxiliary heating or starting devices shall be provided at the option of the purchaser.

3.7.2 Gasoline engine. When specified, power unit shall be liquid cooled, internal combustion, four stroke cycle gasoline type, eight cylinders and shall conform to requirements as specified herein. Engines furnished shall be rated in accordance with SAE J245.

3.7.3 Diesel engine. Unless otherwise specified, the engine shall be a liquid cooled, compression ignition type. Engine shall develop the required horsepower and torque (per table no. 1 or 2), and operate smoothly and efficiently. Engines furnished shall be rated in accordance with SAE J816.

3.8 Oil filter. The oil filter shall be of the full-flow type that is recommended or approved by the engine manufacturer, so constructed and mounted that no special equipment or skill will be required in changing the filtering element.

3.9 Air filter. Unless otherwise specified, air filter shall be engine manufacturer's standard for engine offered.

3.10 Emission controls. Vehicles and engines shall comply with the regulations of the Environmental Protection Agency governing Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines in effect on the date of manufacture.

3.11 Fuel system. The fuel system furnished shall conform with Federal Motor Carrier Safety Regulations 393.65-393.67 and include fuel tanks equipped with an electrical fuel level sensing device with gauge visible to the seated operator. Unless otherwise specified, the style tank(s) shall be manufacturer's standard for the vehicle offered. Fuel tank(s) shall have not less than the capacity per table no. 1 or 2. Truck filler opening shall be so located to provide ready access to filler opening when using standard type fuel delivery nozzle, without obstruction by any portion of mounted body or equipment. All tanks shall be made of steel. When dual fuel tanks are furnished, fuel tank selector valve identified to indicate which tank is furnishing fuel, shall be installed. A selective switch to operate fuel gauge readings shall be installed on the instrument panel adjacent to the fuel gauge. The switch positions shall be identified to indicate which tank reading is being taken. Note: All step or frame mounted tanks shall have not less than 24 inches ground clearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.11.1 Fuel system, gasoline engine. A carburetor/fuel injection fed by a mechanically or electrically-driven fuel pump and protected by fuel filter(s) shall be furnished.

3.11.2 Fuel system, diesel engine. A mechanically-driven fuel pump with all necessary regulating and controlling attachments; accessible and readily removable fuel filter(s) and a water/fuel separator/filter with see thru bowl and drain valve shall be furnished.

3.12 Cooling system. The cooling system shall be liquid pressurized force circulation type. It shall consist of the necessary components of sufficient design and capacity to maintain the engine at the engine manufacturer's specified optimum safe temperature under all operating conditions specified herein, without any loss of coolant. Optimum engine temperature shall be maintained with the vehicle loaded to the G.V.W.R. and continually operating at all driveable altitudes and grades in ambient temperatures ranging from -20° to 125°F. The cooling system shall be suitable for operating with permanent type of anti-freeze solutions and its temperature be thermostatically controlled. All shall be the manufacturer's heaviest duty available.

3.12.1 Drain outlets. Easily accessible drain outlets shall be provided on all vehicles to allow complete cooling system drainage.

3.13 Exhaust system. The exhaust system tubing shall be manufacturer's heaviest duty aluminized steel or stainless steel, of such size as recommended by the engine manufacturer to avoid undue increase in back pressure, and shall be located in such a manner and shall include heat shields or deflectors as necessary to avoid undue heating of fuel system components, batteries, wiring, chassis components, etc.
and tires.

3.14 Power train.

3.14.1 Clutch. The chassis manufacturer's heaviest duty clutch available for the engine and chassis model offered shall be furnished, with torque capacity exceeding maximum gross engine torque.

3.14.2 Transmission. Manufacturer's selective manual or automatic type transmission shall be provided. Input torque capacity of the transmission shall be at least equal to the maximum gross torque delivered by the engine. Manual transmission shall be provided with a standard SAE 704 power take-off (PTO) opening at the right or left side.

3.14.2.1 Transmission, manual. Unless otherwise specified, a manual type transmission shall be furnished and shall have the number of speeds as per table no. 1 or 2.

3.14.2.2 Transmission, automatic. When specified by code, the vehicle shall be provided with automatic transmission. The transmission shall include a hydraulic torque converter with not less than the number of speeds per code. All shall have an oil cooler outside of cooling system.

3.14.2.3 Transfer case, 4x4. When a 4x4 is specified, a part-time, four-wheel drive system shall be provided. The system shall have a 2 speed transfer case. A shift pattern located on the shift knob or decal within the cab shall be provided.

Input torque capacity of the transfer case shall be at least equal to the maximum torque delivered by the engine in the lowest intervening gear reductions and be for on/off road use at all speeds, heaviest duty available.

3.14.3 Drive hubs, front wheels. When a 4x4 is specified, manual front wheel locking hub to disengage the front wheels from the powertrain shall be provided on all front axles.

3.14.4 Drive line components. The drive line components shall be of sufficient capacity and design to transmit the maximum torque of the engine developed through the lowest intervening gear reduction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.14.5 Axles, front and rear. Vehicles shall be equipped with manufacturer's standar or optional front and rear axles. The axle capacity ratings shall be at least equal t table no. 1 or 2, and not less than the gross load imposed at the ground when the vehicle is evenly loaded to its rated GVWR. The axle torque input capacity (rear on 4x2 and front and rear on 4x4) shall be at least equal to the total engine torque developed through the lowest intervening gear reductions. Gear ratios, front and rear, unless otherwise specified, shall be as follows:

Item No.	Ratios
921 to 928	4:10 to 1
931 and 932	4:10 to 1
933 and 934	5:29 to 1
935 and 936	5:29 to 1
937 and 938	5:82 to 1
941 to 943	4:10 to 1
944 and 945	5:29 to 1
946 and 947	5:29 to 1
948 and 949	5:82 to 1
961 to 964	5:82 to 1

3.14.6 Two-speed rear axles. When specified, a multi-speed axle shall be furnished and equipped with electric or air shift, operable from the driver's position in 4x2 with not less than 15,000 rear axle only.

3.14.6.1 Differential, rear. All differential shall have special traction, no-spin or equal.

3.15 Suspension. Vehicle shall be equipped with a suspension system of adequate strength to sustain the G.V.W.R. imposed by the evenly and fully loaded vehicle without evidence of overload or permanent set, not less than specified in table no. 1 or 2. Auxiliary rear springs shall be provided on all units.

3.15.1 Spring stops. The manufacturer's standard spring or axle stops shall be provided. The front spring stops shall prevent the axles from striking the engine oil pan, or other components under all conditions of operation.

3.15.2 Shock absorbers. Heaviest-duty hydraulic, double-acting, shock absorbers available for chassis model and axle offered shall be furnished on all front axles, and rear axles as per table no. 1 or 2.

3.16 Wheels, rims, tires, and tubes.

3.16.1 Wheels and rims. Unless otherwise specified, vehicles shall be equipped with wheels and rims per table no. 1 or 2. Rim contours and sizes shall conform to the current recommendations of the Tire and Rim Association, Inc.

3.16.2 Tires. Unless otherwise specified, all tires furnished including the spare (see 3.16.4), shall be truck type, tube or tubeless: with standard highway tread design on front and nonmilitary (crossbar at right angle to center line of tread not permitted), mud and snow type on rear, 4x2; and mud and snow on front and rear of all 4x4's per table no. 1 or 2.

3.16.3 Inner tubes. When tube type tires are furnished, the inner tubes shall be of the type for the tires furnished in accordance with recommendations of the Tire and Rim Association, Inc.

3.16.4 Spare wheel and tire. When specified by code, one inflated spare wheel or rim, tire and tube (if applicable), shall be furnished with each vehicle. Size and tread shall match that provided on rear of truck mounted on unit.

3.16.5 Tire chain clearance. There shall be no interference which will prevent use of tire chains on driving wheels in accordance with SAE J683.

3.16.6 Wheel-tire balancing. All wheel-tire assemblies of the vehicle shall be balanced in accordance with the current chassis manufacturer's standard.

3.16.7 Radial tires. When specified by code RAD, unit shall have steel belted radial tires, front and rear.

3.17 Brakes. Full air brakes or booster hydraulic brakes shall be furnished as specified in table no. 1 or 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.17.1 Service brakes.

3.17.1.2 Air brakes. When specified in table no. 1 or 2, full air brakes shall be furnished with all necessary components, including, but not limited to, the following:

1. Air compressor having a capacity of not less than 12 (cfm), at rated pressure.

2. Reservoir(s) with not less than 2,000 cubic inches total capacity, each tank equipped with drain valve automatic moisture ejector, and with safety and check valves between the compressor and last reservoir tank.

3. Spring type parking brake

4. Dash mounted air reservoir pressure gauge and low air pressure warning buzzer

5. Air dryer, desiccant type with heater and automatic moisture ejector.

3.17.1.3 Hydraulic booster brakes. When specified in table no. 1 or 2, the vehicle shall be equipped with vacuum or hydraulic assisted, hydraulic actuated four-wheel service brakes. Vacuum assisted brakes shall have a minimum 1000 cubic inch total vacuum reserve, and "low vacuum" warning indicator light or device in cab.

3.17.2 Brake performance. The parking brakes shall be capable of controlling and holding the vehicle in either direction, forward or reverse, loaded to its G.V.W.R. on a 20 percent grade, free of ice and snow. Service brakes shall conform to requirements of SAE J992.

3.18 Controls and mechanisms.

3.18.1 Controls. Controls shall be complete and conveniently accessible to the operator. Lever controls shall be designed and located so as to permit easy entrance and exit to and from the operator's compartment. Instruments and controls shall be identified as to function and installed in a manner facilitating easy removal for servicing.

3.18.2 Steering mechanism. The chassis shall be equipped with manufacturer's standard power steering mechanism. The steering mechanism shall provide for operation and shall be capable of controlling the direction of the fully loaded vehicle under all operating conditions. Means shall be provided for rapid and easy adjustment to compensate for wear in the steering mechanism. Easily accessible means of lubricating the system shall be provided.

3.19 Electrical.

3.19.1 Equipment and lighting. Vehicle shall be equipped with a complete 12 volt electrical system. The electrical supply source shall be as specified in 3.19.2 and 3.19.3. Lighting, signalling, wiring and protective devices, shall be provided.

3.19.2 Batteries. The manufacturer shall furnish batteries that meet or exceed the minimum cold cranking amperes per table no. 1 or 2. The system shall be wired per figure I and include a voltmeter and load disconnect switch, like the Cole Hersee #2484-16.

3.19.3 Alternator. Unless otherwise, specified, a 12 volt alternator and voltage control, shall be provided with a capacity not less than table no. 1 or 2.

3.19.4 Ignition system. Shall be furnished with the manufacturer's current ignition system. Ignition system wiring shall be routed safely, fastened securely, clear of hazards, and shall be accessible. Ignition switch furnished shall include an accessory position.

3.19.5 Starter system. A key ignition switch shall be provided. A high torque, minimum current draw starter motor of heaviest duty available for the model and engine offered shall be furnished with compatible solenoid and wiring.

3.19.6 Wiring and Devices. All added wiring shall be harness type (in looms), grease and oil resistant, moisture proof, routed in protected locations neatly, securely fastened with insulated metal cable straps, and all apertures properly grommetted for passing wiring. Wiring shall conform to SAE J1292. Each added wiring circuit shall be protected by breakers (automatic Reset), all added wiring shall be color coded or numbered every 3" and shall be in accordance with SAE J-163, J-561, J-928, J-553 and J-1128 SXL type wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.19.7 Electromagnetic interference suppression. Vehicle shall be electromagnetic interference suppressed in accordance with SAE J551 and J552.

3.20 Chassis equipment. The chassis equipment, etc., shall be complete and shall include, but shall not be limited to, the equipment specified herein.

3.20.1 Bumpers. A front bumper shall be provided for all vehicles, bumper mounting brackets shall be attached to frame. All pickups shall have heaviest duty available rear step type bumper.

3.20.2 Fenders. Front fenders and running boards shall be provided on all cab types.

3.20.3 Engine hood. The engine hood shall be so fitted to prevent water leakage from precipitation, and shall be readily removable, or shall open sufficiently to provide easy access to components in the engine compartment requiring routine maintenance.

3.21 Cab. All cabs shall be the conventional type (two and four door), full-width of all metal or metal and reinforced fiberglass construction with the standard insulation, floormats (front and rear on four door), glove compartment, domelight(s), and a full-width adjustable seat (front and rear on four door) upholstered in heavy-duty tan vinyl.

3.21.1 Seatbelts and anchors. Seatbelt assemblies, attachment hardware, and retractors for the front outboard belts shall be furnished, for driver and each occupant.

3.21.2 Glass. Glazing shall be clear and conform to Federal Motor Carrier Safety Regulation 393.60. Tinted glass shall be furnished when specified by code.

3.21.3 Instruments, lights, etc. The instruments shall be the manufacturer's standard easily accessible for maintenance, and shall include, but not be limited to, panel lights, interior dome lights, speedometer and recording odometer accurate within 5 percent, lighting control switches and indicators, choke when applicable, fuel shut-off for diesels, low air pressure warning devices when air brakes are furnished, tachometer, voltmeter, oil pressure, engine temperature and fuel gauge(s), vacuum indicator when hydraulic brakes are furnished, and heater-defroster controls.

3.21.4 Accessories. Unless otherwise specified, the accessories furnished shall be the manufacturer's standard and shall include, but not be limited to, two or more speeds, constant in each speed, windshield wipers; horn(s); heater and defrosters; dual sun visors; cigar lighter; dual outside rearview mirrors; back-up warning device.

3.21.5 Mirrors, rearview. Outside rearview mirrors furnished shall be dual western type swing on extendable, bracket mounted, independently adjustable mirror heads of the largest size appropriate for vehicle model offered. Mirror heads shall incorporate a separately adjustable wide angle (convex) section. Mirrors shall be securely mounted to cab or cab doors and free of vibration.

3.21.6 Heater and defroster. Hot water, fresh air type heater and defroster with a 20,000 B.T.U. per hour minimum rating sufficient for occupant's comfort with dash mounted panel controls convenient to the driver, shall be provided. Discharge outlets shall be provided to direct heater air to floor and to defroster louvers by blowers. Cab compartment ventilator system other than windows shall be provided.

3.22 Tools. When specified by code, each vehicle shall be furnished with the manufacturer's standard tools including, but not limited to, hydraulic jack of sufficient capacity to lift wheel of fully loaded vehicle to height necessary to permit removal and replacement of wheel and tire assembly, jack handle, and lug nut wrench.

3.23 Paint, finish, or color. Exterior color shall be specified from Federal Standard No. 595A. The interior finish shall be manufacturer's standard compatible color with the exterior.

3.24 STANDARD, and additional requirement.

3.24.1 Operator's, servicing, and parts manuals. The successful bidder shall furnish at least two operator's, maintenance handbook and parts book for the vehicle and any special equipment with warranties.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.24.2 Rustproofing. The unit shall be completely rustproofed in accordance with Federal Standard 297, body, cab, frame, wheelwells, inside of all doors.

3.24.3 Brush guard. All units shall have the front bumper extended 10 inches to 15 inches with a 1/8" aluminum treadplate deck and full brush guard of not less than 1 1/2 inch steel tubing or pipe with center covered with at least 10 gauge expanded metal screen. Brush guard shall not be higher than the hood of the unit.

3.24.4 Skid plates. When code SP is specified, unit shall have a 1/4 inch skid plate installed protecting the engine, transmission, and transfer case from ground contact. Each plate shall be demountable for servicing. Opening shall be provided to enable draining oil from all units.

3.24.5 Roll and light bar. When code RB is specified, unit shall have a roll and light bar behind cab. Bar shall be made of not less than .250" x 2" x 4" steel tubing bolted to truck frame with not less than 1/2", grade 8 bolts (3 per side). Bar shall be as per figure II and painted black. Bar shall be not more than 1" above top of cab.

3.25 Body. All pickups, 4x2 and 4x4, shall have OEM's standard 8 to 8.5 foot flushside (fender inside) pickup body.

3.25.1 Bodies, utility type.

3.25.2 Fiberglass. When code UFB is specified, the body shall be one piece molded fiberglass construction with three compartments on each side and one (1) hotstick door on right side of body with full length hotstick shelf. The entire body shall be no less than 3/16" (.187) thick of fiberglass reinforced polyester resin (FRP). The unfilled polyester resin shall include a chemical fire retardant such as Dion #6604T, or equal. The glass to resin ratio shall be 30/70 average or better. The outer finish shall be a permanent NPG-ISO gel coat of .015 to .018 thickness cured. Any one square foot of the loadbed area shall sustain a 500 pound and shelving a 100 pound live load without damage or permanent distortion. The interior compartments shall be coated with either a buff colored resin (gel coat) or plastic paint to provide a clean, smooth interior. All compartment openings shall be reinforced to insure rigid non-distorting surfaces.

Floor-load bed. The load bed shall be an integral part of the body and shall be no less than 1 1/8" thick including reinforcing (coring). There shall be at least 3/16" of fiberglass reinforced polyester (FRP) resin on each side of coring material. Load bed and compartment tops shall have a nonslip permanent surface to insure user safety. Floor design and mounting shall be of sufficient strength to support one and one half times the rated capacity of the chassis.

Tailgate. The tailgate shall be constructed of molded FRP as stated above and have a nonslip surface. The tailgate shall be held in the closed position by stainless steel slam type latches and in the open position by stainless steel support. The tailgate hinge shall be a continuous (piano type) stainless steel hinge. All tailgate hardware and mounting fasteners shall be stainless steel. The top edge of the tailgate assembly shall be protected from damage by aluminum treadplate channel (approximate dimensions of 1" x 1" x 3").

Cabinet doors. Cabinet doors shall provide access to all portions of each cabinet. Door enclosures shall be weatherproofed. Cabinet doors shall be molded of reinforced fiberglass with core type reinforcing covering the entire face of the doors. All hinge bolts shall extend through FRP and core material. All bolts and nuts shall be stainless steel. All nuts shall have a nylon insert to prevent loosening. All doors shall be equipped with chrome plated hinges. Hinge pins shall have a minimum diameter of 5/16" and a minimum pivot area length of 1 1/2". Surface contact per hinge shall be not less than four square inches per tongue and four square inches per butt. Hinge pins shall be nonremovable for security. Door latches shall be three point stainless steel twist lock, extra-large with offset D-ring type, for ease of operation with gloves. All doors on a body shall be keyed alike. A minimum of four keys shall be furnished with each body. Latches shall be flush mounted. Each horizontal door shall have a limit chain of 1/16" stainless steel aircraft cable, attached at each end to support it in a horizontal work

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

position. The cables shall be fastened to approximately a 1 1/4" x 2 1/2" steel plate each end. Horizontal doors shall be capable of supporting a live load of not less than [illegible] pounds per square foot. Striker plates shall be of formed stainless steel. Door gasketing shall be of closed cell, fully skinned sponge rubber, and shall provide a dust and moisture tight closure.

Rock guards. The front lower corners of the body shall be protected by an aluminum plate 3/16" thick and approximately 10" x 10" square and securely fastened to the body with stainless steel bolts.

The inside rear of each wheelwell shall be lined with 12 gauge steel plate to protect the body against damage by rocks or broken chain links.

Special reinforcement. The rear skirt below the load bed floor shall be reinforced to provide a total thickness in this area of not less than 1" to resist twisting forces caused by uneven terrain.

Approximate compartment dimensions for 60" CA.

1. Left front, 28"W x 32"H x 15"D.
2. Over wheels, left side, 42"W x 15"H x 15"D.
3. Left rear, 20"W x 32"H x 15"D.
4. Right front, 28"W x 32"H x 15"D.
5. Over wheels, right side, 42"W x 16"H x 15"D.
6. Left rear, 20"W x 32"H x 15"D.
7. One (1) hotstick at rear with door, 6"W x 9"H, the length of body.

Approximate compartment dimensions for 84" CA.

1. Left front, 27"W x 48"H x 18"D.
2. Left front of wheels, 27"W x 48"H x 18"D.
3. Over wheels, left side, 51"W x 18"H x 18"D.
4. Left rear, 20"W x 48"H x 18"D.
5. Right front, 27"W x 48"H x 18"D.
6. Right front of wheels, 27"W x 48"H x 18"D.
7. Over wheels, right side, 51"W x 18"H x 18"D.
8. Right rear, 20"W x 48"H x 18"D.

3.25.3 Steel. The utility body shall be constructed of corrosion resistant metal (galvanneal steel or equal), with the exception of material(s) used to accomplish the objectives (example - safety tread steel plate floor, etc.). These service bodies shall have a center load compartment, with cabinets on each side. Any area of one square foot shall be capable of sustaining a live load of 500 pounds in the load space, and 100 pounds in the cabinets, and on the shelves without permanent deformation.

Floor and bulkhead. Load compartment floor shall be of not less than 14 gauge (0.0747 in.) safety tread steel plate or equal. Bulkhead shall be constructed to the height of the load space and shall be not less than 18 gauge (0.0478 in.) high-tensile steel, or 16 gauge (0.0598 in.) carbon steel reinforced for rigidity. The bulkhead shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

be capable of withstanding a horizontal static load equal to 1/2 the payload capacity of the vehicle without permanent distortion.

Tailgate. Tailgate shall be constructed of not less than 18 gauge (0.0478 in.) high-tensile steel, or 16 gauge (0.0598 in.) carbon steel reinforced for rigidity. Tailgate shall be hinged and equipped with supports for retention in horizontal position, flush or slightly lower than floor level.

Cabinet materials and construction. Cabinet headers shall be not less than 18 gauge (0.0478 in.) high-tensile steel, or 16 gauge (0.0598 in.) carbon steel. Cabinet backs, partitions, and shelves shall be of not less than 20 gauge (0.0359 in.) high-tensile steel, or 18 gauge (0.0478 in.) carbon steel. Cabinet doors shall be not less than 20 gauge (0.0359 in.) high-tensile, or 18 gauge (0.0478 in.) carbon steel, single thickness reinforced, or 22 gauge (0.0299 in,.) carbon steel, double panel reinforced. Latches shall be stainless steel type and bolt-through fastened.

Cabinet doors. Cabinet doors shall provide access to all portions of each cabinet, and door closures shall be weatherproof incorporating a sealing system. Doors shall have continuous rod or hem type heavy-duty hinges, with stainless steel hinge pins or stainless steel, bronze, or nylon insert sockets. Latches shall have recessed handles. All doors shall be provided with cylinder type locks, operable from the same key but having various combinations of cylinder locks between vehicles on multi-unit contracts. Moving parts of latches and locks shall be constructed of, or plated with corrosion-resistant material. All doors shall be provided with stays, vertical doors with spring loaded stays, and shall not interfere with each other when open. Horizontal doors shall be reinforced so as to permit their use as a shelf and shall be capable of supporting a static load of not less than 25 pounds per square foot. Approximate compartment dimensions for both the 60 and 84 CA are to be the same as for fiberglass body.

3.25.4 Aluminum. Body shall generally conform to the dimensional layout performance of the steel body using aluminum of equal strength.

3.25.5 Stake Body subframe shall be constructed with steel crossmembers and rubrails. Floor shall be hardwood or dense southern yellow pine, 7/8" minimum thickness. Platform shall be floored longitudinally with ship lap or tongue and groove joints or recessed at edges when steel skid strip is provided. Skid strip shall protrude above floor level approximately 1/16" and shall be installed flat and be free of buckling.

Body shall have manufacturer's standard removable rack sections at the front, sides, and rear not less than 40".

60" CA units shall have a 10' body.
84" CA units shall have a 12' body.

NOTE: All bodies (utility and stake) shall be mounted as per the OEM's body builders data book.

3.25.6 Custom pickup body. When Code UP is specified, the unit shall have a custom built stepside pickup body (fender outside of bed). The body shall be made of not less than 12 gauge galvanneal steel, with aluminum diamondplate fender, and side runningboards. The bed inside shall be not less than 49 inches wide, 19 inches deep, and 96 inches long. The bed floor shall also be aluminum diamondplate. Any one square foot of the loadbed area shall sustain 500 lbs. The upper edge of the body and tailgate shall be 1 1/2" tubing.

NOTE: This body is for all cab and chassis over 10,000 GVWR. Unit with a CA of 84" shall have a 24" deep and 120" long body.

3.26 Accessories.

3.26.1 Air conditioning. When Code AC is specified, the unit shall be equipped with the manufacturer's standard dehumidifying/all weather air conditioner. The AC system shall be insulated (headline, firewall, and side panels) and shall have tinted glass.

3.26.2 Tinted glass. When Code TG is specified, the unit shall have tinted glass in all windows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.26.3 Radio. When Code RA is specified, the unit shall have OEM's standard AM/FM rad with not less than one (1) speaker.

3.26.4 Engine hourmeter. When Code EHM is specified, the unit shall have an hourmeter having a totalizing mechanism of not less than 9,999 hours for the chassis engine.

3.26.5 Electric fuel pump backup. When Code EFP is specified, the unit shall have an electric fuel pump as a backup pump to the main pump with switch on cab dash, wired through the ignition switch, with light.

3.26.6 Spare tire assembly. When Code STA is specified, the unit shall have a spare tire assembly including an inflated tire mounted on a wheel. The spare tire and wheel shall be the same size, tread design, and load range (ply rating) as the tires and wheel furnished on the unit.

3.26.7 Alarm system. When Code AS is specified, the unit shall have a low oil pressure/high water temperature warning system with both visible and audible indicators.

3.26.8 Tools. When Code TJ is specified, the unit shall have the required tools for exchanging mounted tire assembly with the spare, and shall include at least a jack, handle and wheelnut wrench. The jack shall be of such closed height as to permit its location under axle, or other satisfactory lift point, as to permit with the flat tire. The jack, without blocking, shall be capable of raising any wheel of the unit loaded to its GVWR to a height adequated to permit removal and replacement of wheel and tire assembly.

3.26.9 Horn, air. When Code AOH is specified, the unit shall have an air operated horn from the unit air brake system.

3.26.10 Towing hooks. When Code TK is specified, the unit shall have two (2) hooks or loops furnished on the front and rear of the unit.

3.26.11 Hand throttle. When Code RTH is specified, the unit shall have a locking hand throttle in the cab for the chassis engine.

3.26.12 Silicone rubber hose. When Code SC is specified, the unit shall have silicone rubber hose with stainless steel clamps.

3.26.13 Worklight. When Code LW is specified, the unit shall have one (1) minimum, 5" sealed beam worklight at the rear of the unit with a switch at the light.

3.26.14 Alternator. When Code AA is specified, the unit shall have a minimum of a 100 ampere alternator on the unit.

3.26.15 Bucket seats. When code BS is specified, the unit shall have OEM type bucket seats in the front part of the cab only.

3.26.16 Cab spotlight. When Code SL is specified, the unit shall have a sealed beam spotlight, minimum 5" post type with control operable from inside cab.

3.26.17 Winches. All winches shall be front mounted.

When Code W-1 is specified, the unit shall have an 8,000 pound electric winch mounted below front deck with a 4-way roller assembly, 150 feet of 3/8" galvanized wire rope, hook, and 10 feet remote control switch.

When Code W-2 is specified, the unit shall have an 12,000 pound electric winch mounted below front deck with a 4-way roller assembly, 150 feet of 3/8" galvanized wire rope, hook, and 10 feet remote control switch.

When Code W-3 is specified, the unit shall have an 8,000 pound PTO winch, mounted below front deck with a 4-way roller assembly, 150 feet of 3/8" wire rope, and hook.

When Code W-4 is specified, the unit shall have a 10,000 pound PTO winch, mounted below front deck with a 4-way roller assembly, 150 feet of 7/16" wire rope, and hook.

When Code W-5 is specified (for units over 20,000 pounds GVWR) the unit shall have a 15,000 pound PTO winch mounted front frame rails, with a 4-way roller assembly, 200 feet of 9/16" wire rope, and hook.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

NOTE: All PTO's for winches shall have a plate or decal reading, "DO NOT OPERATE VEHICLE AT HIGHWAY SPEEDS WITH PTO ENGAGED." installed in cab. PTO shall be controlled from inside the cab.

The PTO shall be off the transmission, unless otherwise specified. When specified on 4x4, it shall be off the transfer case using the main transmission for in and out of the cable (forward speed for cable in and reverse for the cable out).

3.26.18 Trailer hitches. When Codes HP and HB are specified, the following must be specified.

Maximum gross trailer weight.
Drawbar eye dimensions for Code HP.
Ball sizes for Code HB.

All trailer hitches shall have a capacity of 10% over the maximum gross trailer weight as specified.

3.27 Fire package.

3.27.1 All fire packages shall have the following:

1. Aluminum subframe running the full length of the pump and tank area. Frame shall not be less than 2" x 3" x .125" tubing with four (4) lift eyes, two (2) front, and two (2) rear, tank mounted at the front, pump at rear.

2. A pump panel located at the rear facing aft, of brushed stainless steel not less than 14 gauge, with the following:

a. Adjustable locking throttle

b. Ignition with red light (not a key type)

c. Starter switch

d. Choke

e. Panel light(s) with switch

f. Pressure gauge (0-400#)

g. Hourmeter

h. Control handles for valves

3. Power (12 volts) shall be from the truck.

4. Piping may be Aeroquip type hose and ends.

5. All wiring shall be run in loom, color coded, and wired per SAE recommended practices.

6. All valves shall be ball type, full-flow quarter turn swingout, approved for fire service.

7. All discharge and suctions shall be NST.

8. Tanks used in utility body must have wheelwell cutouts on sides.

9. All units shall have not less than a 2 inch tank to pump line, with valve controlled from pump panel.

10. All units shall have a 1 inch pump to tank line with valve controlled from pump panel.

11. All units shall have a 1 1/2 inch discharge NSTM with valve at panel. The 1 1/2" discharge shall face to the rear of the unit.

12. All units shall have a 1 1/2" suction at the rear of unit with 1 1/2" NSTM with cap and chain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.27.2 Tanks. When Codes T-125 through T-500 are specified, the tank shall have the capacity per code. Tank shall be a reinforced fiberglass per U.S. Forest Service #5[illegible] 343A with baffling, removable top, outlets for suction and tank fill, clear corners c[illegible]- brated at 1/4, 1/2, 3/4, 4" filler spout with cab, and stainless steel strainer.

3.27.3 Pump. When Codes P-11-C through P-20-C are specified, the unit shall have a gas engine powered centrifugal pump bolted directly to the engine with the following:

1. Electric start
2. Exhaust primer
3. Self-adjusting shaft parking
4. Minimum 6 quart fuel tank
5. Bronze impeller, balanced, with bronze wear rings
6. Stainless steel shaft or sleeve
7. Pump shall be vibration proof mounted, with flex hose to tank

3.27.3.1 P-11-C. Shall have the following minimum pump performance:

PSI	260	150	50
GPM	10	55	60

3.27.3.2 P-16-C. Shall have the following minimum pump performance.

PSI	340	250	125
GPM	20	50	80

3.27.3.3 P-18-C. Shall have the following minimum performance.

PSI	340	275	160
GPM	35	50	80

3.27.3.4 P-20-C. Shall have the following minimum performance.

PSI	110	105	75	40
GPM	50	100	200	300

3.27.4 Hosereel. When Code HAR is specified, unit shall have an aluminum live hosereel mounted on top of tank with the following:

1. 12 volt rewind motor with switch on each side of reel

2. A roller and spool assembly on each side of reel.

3. Reel shall have a hose capacity of not less than 450' of 3/4" or 200' of 1" hose

4. Reel shall be piped from the discharge side of the pump with a 1" line with valve at reel.

3.27.4.1 When Code HSR is specified, unit shall have a steel reel the same as the HAR reel.

3.27.4.2 When Code HBB is specified, unit shall have a hose bracket mounted on top of tank, with a capacity of not less than 450' of 3/4" or 200' of 1" hose. The bracket shall be made from 10 gauge expanded metal screen with 1/2" tubing at the top.

3.27.5 Booster hose. When Code BH is specified, 50' of 3/4", 400 PSI (working pressure) booster hose with Bar-way type coupling shall be furnished. Specify the number of lengths to be furnished.

3.27.5.1 When Code BH1 is specified, 50' of 1", 400 PSI (working pressure) booster hose with Bar-way type coupling shall be furnished. Specify the number of lengths to be furnished.

3.27.6 Nozzle. When Code BN is specified, a booster nozzle capable of discharging a minimum of 10 GPM in both spray and straight stream shall be furnished.

3.27.6.1 When Code DBN is specified, a booster nozzle capable of discharging a minim dual flow of 10/20 GPM in both spray and straight stream shall be furnished.

NOTE: Fire packages are for agencies who do not have a standard fire package. If other accessories are to be furnished on the package, specify the type, quantity, and model number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplier and services conform to prescribed requirement.

4.2 Source inspection. When source inspection is specified, vehicles shall be inspected on completion, visually, operationally (performance), and by examination of the contractor's documentation and data books, by the Government, prior to shipment from the manufacturer's factory or assembly plant to determine compliance to contract requirements.

4.2.1 Visual inspection. Visual inspection shall include verification of fit, form, finish, workmanship, and configuration of the unit and all subassemblies, components, and auxiliary equipment.

4.2.2 Operational checks. Operational checks of the vehicle shall cover all controls, electrical systems, and devices, doors, windows, cabinets, accessories, in and outside the vehicle. Acceleration, roadability, and braking tests shall be conducted with vehicle loaded to rated GVW.

4.2.2.1 Acceleration test. Unless otherwise specified, the vehicle shall be accelerated from a standing start to the specified top or governed speed a minimum of three consecutive times and from a steady speed of 25 to 30 mph a minimum of three times to determine smoothness of acceleration (no hesitation or stalling) and to check for undue noise or vibrations.

4.2.2.2 Roadability test. Unless otherwise specified, the vehicle shall be operated at normal highway speeds, on both improved and unimproved highways for a minimum of thirty miles to check steering and handling for any unusual pulling, wandering, and shimmying, or any unusual swaying or leaning, during normal lane changing or cornering; chassis and wheels for any undue vibration, rattles, and noises and to check that all instruments are operating normally.

4.2.2.2.1 Four wheel drive. Unless other specified, four wheel drive and four wheel drive conversions shall be driven a minimum of five miles over off-road terrain in addition to the roadability tests specified in 4.2.2.2. The tests shall be conducted in both ranges when applicable and with four wheel drive engaged. Ease of engaging and disengaging and shifting between ranges should be observed during the test.

4.2.2.3 Braking tests. Unless otherwise specified, the vehicle shall be hard braked to a full stop a minimum of four successive times from a speed of 50 mph plus or minus 5 to check for undue pulling to either side, fading, uneven lockup and overheating.

4.2.2.4 Pump tests. Fire pump shall be tested for not less than 10 minutes at each of the minimum performance levels as per 3.27.3.1 to 3.27.3.4 from draft, with no more than a 5 foot lift.

5. PREPARATION FOR DELIVERY

5.1 Preparation. Unless otherwise specified, the truck(s) shall be preserved and packaged for mobile delivery in accordance with supplier's standard commercial practice, insuring carriers acceptance and safe delivery to destination is in compliance with regulations applicable to the mode of transportation

6. NOTES

6.1 Ordering data. Purchaser should select the required vehicle(s) and options from the tables. For the most expeditious ordering of the vehicles, use GSA Form 1781, Requisition. Unless otherwise directed, shipment and inspection acceptance shall be in accordance with 4 (Quality Provisions) and 5 (Preparation for Delivery).

Source: https://assist.dla.mil --Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

6.2 Procedure for ordering vehicles. First select the item number for type truck required that will adequately fulfill the load requirements by examining the data under the item number of the truck. Then, examine the highlighted remaining components pre-engineered as the minimum requirement for the truck. If, because of geographic and/or operational needs, some components require changes, a selection of options may be selected from tables, 1, 2, and 3. Identify those options by the "code" shown alongside the option. Further details about the vehicle and component's requirements are in the specification and should be studied before ordering the vehicle. Write in "2201" at the bottom of the list of Federal Standards in Item 9A of GSA Form 1781, then complete item 9B similar to the following examples.

Example to order:

4x4, 2 door pickup, 3,900 lb. payload, automatic, wide base tires, diesel, air conditioning, radio, 8,000 lb. winch, trailer hitch ball type.

GSA Form 1781 should show: Item #927, codes T2, HX, AC, RA, W-1, HB (5,000 GTW, 2" Ball).

Example to order (fire package):

200 gallon tank, 16 HP pump, steel reel, 200' of 1" booster hose, 10 GPM nozzle.

GSA Form 1781 should show codes: T-200, P-16-C, HSR, 4 ea. BH1, BN.

6.3 Procurement requirements. Invitation for bids, contract, or orders shall contain the following requirements (see 6.3.1 through 6.5).

6.3.1 Domestic warranty. The contractor, on vehicles used within the fifty States of the United States and the District of Columbia, hereby warrants vehicle to be free from defective material and workmanship as follows:

The entire vehicle (except tires and tubes, if warranted by their manufacturers and n l maintenance services) shall be warranted for one year from date of acceptance or 12,0 miles road travel, whichever may occur first. Engine and power train components (as covered by the vehicle manufacturer's standard warranty to the general public for the current year of manufacture), shall be warranted at 50 percent of the normal charge for parts and labor imposed by the dealer or other authorized facility from 12,001 or 50,000 miles provided this occurs within the original 12 months. Provided, however, that if the contractor receives from any supplier or subcontractor any additional warranty on the whole or any component of the vehicle, either in the form of greater time and/or mileage or otherwise and including any pro-rata type arrangement, or if the contractor generally extends to his commercial customers, a greater warranty coverage than that provided the Government under this contract, the Government shall receive corresponding warranty benefits (to start at date of acceptance including the cab and chassis).

The warranty shall include the furnishing (without cost to the Government, f.o.b. contractor's nearest dealer or branch, or to the original destination, if desired by the Government) of new parts and assemblies to replace any that prove to be defective within the warranty period. In addition, when the replacement of the defective parts or assemblies at the contractor's plant, branch, or dealer facility shall be borne by the contractor. On vehicles procured f.o.b. destination and delivered by the driveaway delivery method, when authorized by the Government, warranty limitation will be in addition to the mileage accumulated by such driveaway method.

6.3.2 Export warranty. The contractor, on vehicles used outside the fifty States of the United States and the District of Columbia, warrants the entire vehicle (except tires and normal maintenance services) to be free from defective material and workmanship, for one year from date of acceptance or 12,000 miles road travel, whichever may occur first. On vehicles delivered to the Government by driveaway method, the 12,000 miles warranty limitation will be in addition to the mileage accumulated by such driveaway method. This warranty shall only include the furnishing of new parts or assemblies to replace any returned to the contractor by Government which prove to be defective. The replacement parts or assemblies shall be delivered by the contractor to the port of embarkation in the United States designated by the Government. The contractor shall not be required to the cost of the labor involved in correcting defects in vehicles used outside the fif States of the United States and the District of Columbia.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

.3.3 Repair parts and service. As a continuous operation of the vehicles contemplated by this specification is of utmost importance, it is necessary that the successful bidder be in a position to render prompt service and to furnish replacement parts. Accordingly, bidders shall indicate the extent of their ability to render prompt service by furnishing, upon request, a list of branch offices or agencies where complete stocks of repair parts are maintained and can be secured within a reasonable time after ordering by part number from the manufacturer's parts book and at such discount as may be quoted from year to year by the manufacturer of the vehicle purchased under this specification.

.3.4 Manuals, operating and servicing. The successful bidder shall furnish two operator's handbooks and two lubrication charts, if the charts are not in the handbooks, with each vehicle. One spare parts list or book and shop repair manual for vehicle and furnished equipment shall be furnished with each vehicle (see 6.1).

.3.5 Loading. When shipment is to be made by rail, water, or truck, the vehicle shall be prepared and loaded for shipment in accordance with the best commercial practice. When shipment is to be made by rail on Government Bill of Lading, freight cars shall be loaded so that the Government will obtain the most advantageous freight rate.

.3.6 Servicing prior to loading. Servicing prior to loading shall be in accordance with SA Form 1455, Motor Vehicle Preshipment Inspection and Servicing Requirements. Unless shipping regulations prohibit, the crankcase shall be filled to the operating level with igh quality lubricating oil of the correct viscosity for the "run-in" period as recommended by the engine manufacturer. In addition, the fuel tank shall be filled with 10 gallons of fuel, and the cooling system shall be filled with a 50-50% mixture of water and thylene glycol antifreeze (that will also protect aluminum blocks). Vehicles which are hipped with drained crankcase, half-filled transmission, etc., shall have a warning learly indicated on a tag securely attached to the steering wheel or clearly marked on he windshield that the crankcase and transmission must be filled prior to running the ngine.

.3.7 Servicing for driveaway delivery. When driveaway by Government personnel is specified in the invitation for bid, the contractor shall perform all the servicing operations pecified in 6.3.6.

.4 Statement of Origin or Bill of Sale. A manufacturer's Statement of Origin or Bill of ale showing the applicable delivery order number is required for each vehicle procured nder this specification. Unless otherwise specified, such documents shall be forwarded o the consignee.

.5 Preproduction conference. When requested by the contracting officer, a meeting of he contractor, contracting officer, a representative of the ordering agency, and the pecification manager shall be held prior to the start of construction of the unit.

.6 Special vehicle. All units in this specification are special vehicles for off-road ire supppression and are not assembly line units. Four wheel drive and the four door cab ill be added to some units.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 1

TRUCK, PICKUP, 4x2

ITEM NO.	921	922	923	924
Payload	3400	3300	4400	3900
Style, cab	Conv., 2 door	Conv., 4 door	Conv., 2 door	Conv., 4 door
GVWR, min.	8700	9000	10000	10000
Axle, rear rating	6200	6200	7400	7400
Axle, front rating	4000	4000	4000	4000
Wheelbase	130	164	130	164
Frame, min., RBM	248,000	248,000	248,000	248,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/148/246@2000	8/148/246@2000	8/148/246@2000	8/148/246@2000
Trans. type/speed	Manual, 4	Manual, 4	Manual, 4	Manual, 4
Clutch size	11"	11"	11"	11"
Differential	Locking	Locking	Locking	Locking
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	3900	4000	4000	4200
Spring, rear	6300	6300	7500	7500
Shocks	HD front/rear	HD front/rear	HD front/rear	HD front/rear
Wheels, diameter/type	16" single	16" single	16" dual rear	16" dual rear
Tire size, ply, tread	LT235/85R(E)	LT235/85R(E)	7.50x16(D)	7.50x16(D)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Dual 700	Dual 700	Dual 700	Dual 700
Fuel capacity	32 gallons	32 gallons	32 gallons	32 gallons

REPRESENTATIVE USA VEHICLES

Item Number	921	922	923	924
GM	C-30	C-30	C-30	C-30
Ford	F-350	F-350	F-350	F-350

STANDARD ALTERNATES AND OPTIONS

Engines	Code
Gas, min., 350 CID	E3
Gas, min., 450 CID	E4
Transmission	
Automatic, 3 speed	A2

Tires and wheels	Code
Wide base (921 & 922 only) 10-16.5LT(E)	HW
Wide base (923 & 924 only) 12-16.5 LT(F)	HX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 1

CHASSIS WITH CAB, 4x2

ITEM NO.	931	932	933	934
Payload	5000	3400	9000	8600
Style, cab	Conv., 2 door	Conv., 4 door	Conv., 2 door	Conv., 4 door
GVWR, min.	10500	10000	16000	16000
Axle, rear rating	7500	7500	11000	11000
Axle, front rating	4000	4000	5000	5000
Cab to axle	60"	60"	60"	60"
Frame, min., RBM	248,000	248,000	525,000	525,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/148/246@2000	8/148/246@2000	8/165/354@1200	8/165/354@2000
Trans. type/speed	Manual, 4	Manual, 4	Manual, 4	Manual, 4
Clutch size	11"	11"	14"	14"
Differential	Locking	Locking	No-spin	No-spin
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	4000	4000	6000	6000
Spring, rear	7300	7300	15000	15000
Shocks	HD front/rear	HD front/rear	HD front	HD front
Wheels, diameter/type	16" dual	16" dual	20" dual	20" dual
Tire size, ply, tread	7.50x16(D)	7.50x16(D)	7.50x20(D)	7.50x20(D)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Dual 700	Dual 700	Dual 700	Dual 700
Fuel capacity	40 gallons	40 gallons	40 gallons	40 gallons

REPRESENTATIVE USA VEHICLES

Item Number	931	932	933	934
GM	C-30	C-30	C-5D	C-5D
Ford	F-350	F-350	F-600	F-600
International	--	--	--	1654

STANDARD ALTERNATES AND OPTIONS

Engines	Code	Tires and wheels	Code
Gas, min., 350 CID	E3	Wide base (931 & 932 only) 12-16.5LT(F)	HX
Gas, min., 450 CID (931 & 932 only)	E4	Wide base (933 & 934 only) 15-22.5(F)	HXB
Transmission			
Automatic, 3 speed (931 & 932 only)	A2		
Automatic, 4 speed (933 & 934 only)	A4		
Manual, 5 speed (933 & 934 only)	T5		

Source: https://assist.dla.mil - Downloaded: 2026Ø10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 1

CHASSIS WITH CAB, 4x2

ITEM NO.	935	936	937	938
Payload	10600	10000	15000	14400
Style, cab	Conv., 2 door	Conv., 4 door	Conv., 2 door	Conv., 4 door
GVWR, min.	20000	20000	26000	26000
Axle, rear rating	15000	15000	17000	17000
Axle, front rating	6000	6000	9000	9000
Cab to axle	84"	84"	84"	84"
Frame, min., RBM	700,000	700,000	900,000	900,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/165/354@1200	8/165/354@1200	8/175/415@1400	8/175/415@200
Trans. type/speed	Manual, 4	Manual, 4	Manual, 5	Manual, 5
Clutch size	14"	14"	14"	14"
Differential	No-spin	No-spin	No-spin	No-spin
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	6000	6000	9000	9000
Spring, rear	15000	15500	17000	17000
Shocks	HD front	HD front	HD front	HD front
Wheels, diameter/type	20" dual	20" dual	20" dual	20" dual
Tire size, ply, tread	8.25x20(D)	8.25x20(D)	9.00x20(E)	9.00x20(E)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Dual 700	Dual 700	Total 1800	Total 1800
Fuel capacity	50 gallons	50 gallons	50 gallons	50 gallons

REPRESENTATIVE USA VEHICLES

Item Number	935	936	937	938
GM	C-6D	C-6D	C-7D	C-7D
Ford	F-600	F-600	F-7000	F-7000
International	1654	1654	1754	1754

STANDARD ALTERNATES AND OPTIONS

Engines	Code
Gas, min, 350 CID	E3
Gas, min., 425 CID (937 & 938 only)	E5
Diesel, min. 210 HP 550 @ 1400 (937 & 938)	E6
Diesel, min. 225 HP 560 @ 1400 (937 & 938)	E7
Rear axle	
2 speed axle	R2

Transmission	Code
Automatic, 4 speed	A4
Automatic, 5 speed	A5
Manual, 5 speed (935 & 936 only)	T5
Tires and wheels, wide base	
15-22.5(F) (935 & 936)	HXB
18-22.5(G) (937 & 938)	HXC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 1

CHASSIS WITH CAB, 4x2

ITEM NO.	961	962
Payload	23100	22500
Style, cab	Conv., 2 door	Conv., 4 door
GVWR, min.	34000	34000
Axle, rear rating	22000	22000
Axle, front rating	12000	12000
Cab to axle	108"	108"
Frame, min., RBM	1,749,000	1,749,000
Engine type	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/210/550@1400	8/210/550@1400
Trans. type/speed	Manual, 5	Manual, 5
Clutch size	14"	14"
Differential	No-spin	No-spin
Brake type	Air	Air
Spring, front	12000	12000
Spring, rear	22000	22000
Shocks	HD front	HD front
Wheels, diameter/type	20" dual	20" dual
Tire size, ply, tread	11.00x20, 14 ply	11.00x20, 20 ply
Alternator	80 amp	80 amp
Battery CCA	Total 1800	Total 1800
Fuel capacity	50 gallons	50 gallons

REPRESENTATIVE USA VEHICLES

Item Number	961	962
GM	C7D042	C7D042
Ford	F-8000	F-8000
International	1955	1955

STANDARD ALTERNATES AND OPTIONS

Engines	Code	Transmission	Code
Gas, min, 425 CID	E5	Automatic, 4 speed	T4
Diesel, min. 225 HP 560 @ 1400 (N/A on IH)	E7	Automatic, 5 speed	T5
		Tires and wheels, wide base	
		18-22.5(J) (GVW will be 32,000 only with wide base tires)	HXD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 2

PICKUP, 4x4

ITEM NO.	925	926	927	928
Payload	3300	3000	3900	3100
Style, cab	Conv., 2 door	Conv., 4 door	Conv., 2 door	Conv., 4 door
GVWR, min.	9200	9200	10000	10000
Axle, rear rating	6200	6200	7400	7400
Axle, front rating	4500	4500	4500	4500
Wheelbase	130"	164"	130"	164"
Frame, min., RBM	248,000	248,000	248,000	248,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/148/246@2000	8/148/246@2000	8/148/246@2000	8/148/246@2000
Trans. type/speed	Manual, 4	Manual, 4	Manual, 4	Manual, 4
Clutch size	11"	11"	11"	11"
Differential	Locking	Locking	Locking	Locking
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	4500	4500	4500	4500
Spring, rear	6300	6300	7500	7500
Shocks	HD front/rear	HD front/rear	HD front/rear	HD front/rear
Wheels, diameter/type	16" single	16" single	16" dual	16" dual
Tire size, ply, tread	LT235/85R(E)	LT235/85R(E)	7.50x16(D)	7.50x16(D)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Dual 700	Dual 700	Dual 700	Dual 700
Fuel capacity	32 gallons	32 gallons	32 gallons	32 gallons

REPRESENTATIVE USA VEHICLES

Item Number	925	926	927	928
GM	K-30	K-30	K-30	K-30
Ford	F-350	F-350	F-350	F-350

STANDARD ALTERNATES AND OPTIONS

Engines	Code	Tires and wheels	Code
Gas, min., 350 CID	E3	Wide base (925 & 926 only) 10-16.5LT(E)	HW
Gas, min., 450 CID	E4	Wide base (927 & 928 only) 12-16.5LT(F) Highway tread only	HX
Transmission			
Automatic, 3 speed	A2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 2

CHASSIS WITH CAB, 4x4

ITEM NO.	941	942	943	944
Payload	5000	4400	6300	7500
Style, cab	Conv., 2 door	Conv., 4 door	Conv., 2 door	Conv., 2 door
GVWR, min.	11000	11000	13700	16000
Axle, rear rating	8200	8200	8200	11000
Axle, front rating	4500	4500	5500	6000
Cab to axle	60"	60"	60"	60"
Frame, min., RBM	248,000	248,000	300,000	525,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/148/246@2000	8/148/246@2000	8/148/246@2000	8/165/354@1200
Trans. type/speed	Manual, 4	Manual, 4	Manual, 4	Manual, 4
Clutch size	11"	11"	11"	11"
Differential	Locking	Locking	Locking	Locking
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	4500	4500	5500	6000
Spring, rear	8200	8200	8200	11000
Shocks	HD front	HD front	HD front	HD front
Wheels, diameter/type	16" dual	16" dual	16" dual	20" dual
Tire size, ply, tread	7.50x16(D)	7.50x16(D)	7.50x16(D)	7.50x20(D)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Dual 700	Dual 700	Dual 700	Total 1800
Fuel capacity	40 gallons	40 gallons	40 gallons	50 gallons

REPRESENTATIVE USA VEHICLES

Item Number	941	942	943	944
GM	K-30	K-30	K-30	C-5D
Ford	F-350	F-350	F-350	F-600
International	--	--	--	1654

STANDARD ALTERNATES AND OPTIONS

Engines	Code
Gas, min., 350 CID	E3
Gas, min., 450 CID (941, 942, & 943)	E4
Transmission	
Automatic, 3 speed	A2
Automatic, 4 speed (944)	A4
Manual, 5 speed (944)	T5

Tires and wheels, wide base	
12-16.5LT(F), (943) Highway tread only	HX
15-22.5(F) (944)	HXB

NOTE: Wide base tires on 943
The GVWR will be 13,580#
The Payload will be 6,180#

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 2

CHASSIS WITH CAB, 4x4

ITEM NO.	945	946	947	948
Payload	6900	9500	8900	14500
Style, cab	Conv., 4 door	Conv., 2 door	Conv., 4 door	Conv., 2 door
GVWR, min.	16000	21000	21000	27500
Axle, rear rating	11000	15000	15000	18500
Axle, front rating	6000	7500	7500	9000
Cab to axle	60"	84"	84"	84"
Frame, min., RBM	900,000	900,000	900,000	900,000
Engine type	Diesel	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/165/354@1200	6/180/465@1600	6/180/465@1600	6/205/442@1700
Trans. type/speed	Manual, 4	Manual, 5	Manual, 5	Manual, 5
Clutch size	14"	14"	14"	14"
Differential	No-spin	No-spin	No-spin	No-spin
Brake type	Hyd. power	Hyd. power	Hyd. power	Hyd. power
Spring, front	6000	7500	7500	9000
Spring, rear	11000	15000	15000	18500
Shocks	HD front	HD front	HD front	HD front
Wheels, diameter/type	20" dual	20" dual	20" dual	20" dual
Tire size, ply, tread	7.50x20(D)	8.25x20(E)	8.25x20(E)	10.00x20(F)
Alternator	80 amp	80 amp	80 amp	80 amp
Battery CCA	Total 1800	Total 1800	Total 1800	Total 1800
Fuel capacity	50 gallons	50 gallons	50 gallons	50 gallons

REPRESENTATIVE USA VEHICLES

Item Number	945	946	947	948
GM	C-5D	C-6D	C-6D	C-7D
Ford	F-600	F-600	F-600	F-7000
International	1654	1654	1654	1854

STANDARD ALTERNATES AND OPTIONS

Engines	Code
Gas, min., 350 CID	E3
Gas, min., 425 CID (946, 947, & 948)	E5
Diesel, min. 210 HP, 550 @ 1400 (946,947,&948)	E6
Diesel, min. 225 HP, 560 @ 1400 (946,947&948)	E7

Transmission	Code
Automatic, 4 speed	A4
Automatic, 5 speed	A5
Manual, 5 speed (945)	T5
Tires and wheels, wide base	
15-22.5(F) (945)	HXB
18-22.5(G) (946 & 947)	HXC
18-22.5(H) (948)	HXD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE NUMBER 2

CHASSIS WITH CAB, 4x4

ITEM NO.	949	963	964
Payload	13900	22,400	21900
Style, cab	Conv., 4 door	Conv., 2 door	Conv., 4 door
GVWR, min.	27500	32000	32000
Axle, rear rating	18500	23000	23000
Axle, front rating	9000	9000	9000
Cab to axle	84"	108"	108"
Frame, min., RBM	900,000	1,749,000	1,749,000
Engine type	Diesel	Diesel	Diesel
Engine, cyl/GHP/T@RPM	8/205/442@1700	8/210/550@1400	8/210/550@1400
Trans. type/speed	Manual, 5	Manual, 5	Manual, 5
Clutch size	14"	14"	14"
Differential	No-spin	No-spin	No-spin
Brake type	Air	Air	Air
Spring, front	9000	9000	9000
Spring, rear	18500	23000	23000
Shocks	HD front	HD front	HD front
Wheels, diameter/type	20" dual	20" dual	20" dual
Tire size, ply, tread	10.00x20(F)	11.00x20, 14 ply	11.00x20,14 ply
Alternator	80 amp	80 amp	80 amp
Battery CCA	Total 1800	Total 1800	Total 1800
Fuel capacity	50 gallons	50 gallons	50 gallons

REPRESENTATIVE USA VEHICLES

Item Number	949
GM	C-7D
Ford	F-7000
International	1854

STANDARD ALTERNATES AND OPTIONS

Engines	Code
Gas, min., 425 CID	E5
Diesel, min. 210 HP, 550 @ 1400	E6
Diesel, min. 225 HP, 560 @ 1400	E7

Transmission	Code
Automatic, 4 speed	A4
Automatic, 5 speed	A5
Tires and wheels, wide base	
18-22.5(H) (item 949)	HXD
18-22.5(J) (item 963 & 964)	HXD2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE 3

OPTIONS FOR ALL UNITS

COMPONENT	CODE
Air brakes for unit, 20,000 GVWR and over	ABS
Air conditioning and tinted glass	AC
Tinted glass only	TG
Radio, AM/FM	RA
Engine hourmeter	EHM
Electric fuel pump (backup)	EFT
Spare tire assembly	STA
Alarm system, low oil pressure/high water temperature	AS
Tools, hydraulic jack, wheel wrench and handles	TJ
Horn, air (with air brakes only)	AOH
Towing hooks/loops	TK
Hand throttle in cab	RTH
Silicone rubber hose w/SS clamp	SC
Work light, rear	LW
Alternator, 100 amperes	AA
Bucket seats	BS
Cab spotlight	SL
Roll and light bar	RB
Skid plates	SP
Radial tires	RAD
WINCHES	
Electric	
Front, 8,000 lbs.	W-1
Front, 12,000 lbs.	W-2
PTO (manual transmission only)	
Front, 8,000 lbs.	W-3
Front, 10,000 lbs.	W-4
Front, 15,000 lbs. (over 20,000 GVWR only)	W-5
TRAILER HITCHES	
Pintle type	HP
Ball type	HB
BODIES, UTILITY	
Steel	USB
Fiberglass	UFB
Aluminum	UAB
BODIES, STAKE	
Wood bed	CC
BODIES, PICKUP	
Step type	UP

FIRE PACKAGES

Tanks		Accessories	
125 gallon	T-125	Aluminum hosereel	HAR
150 gallon	T-150	Steel hosereel	HSR
200 gallon	T-200	Hose basket	HBB
250 gallon	T-250	3/4 inch booster hose	BH
500 gallon	T-500	1 inch booster hose	BH1
		10 GPM nozzle	BF
Pumps		10-20 GPM nozzle	Db
11 horsepower	P-11-C		
16 horsepower	P-16-C		
18 horsepower	P-18-C		
18 horsepower	P-20-C		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.


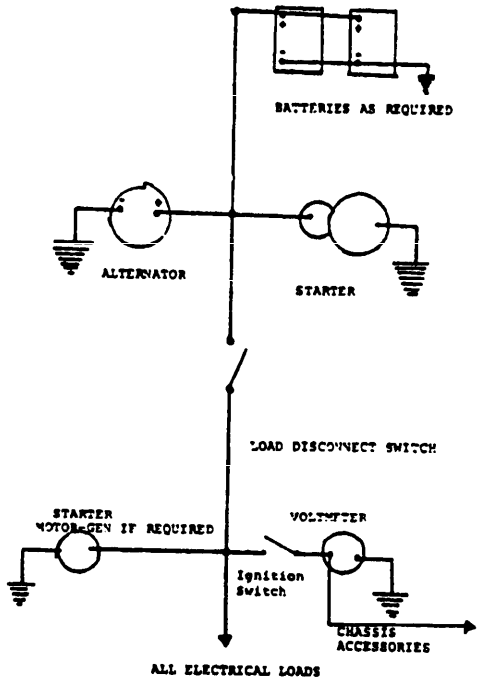


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

Figure II

Roll and Light Bar

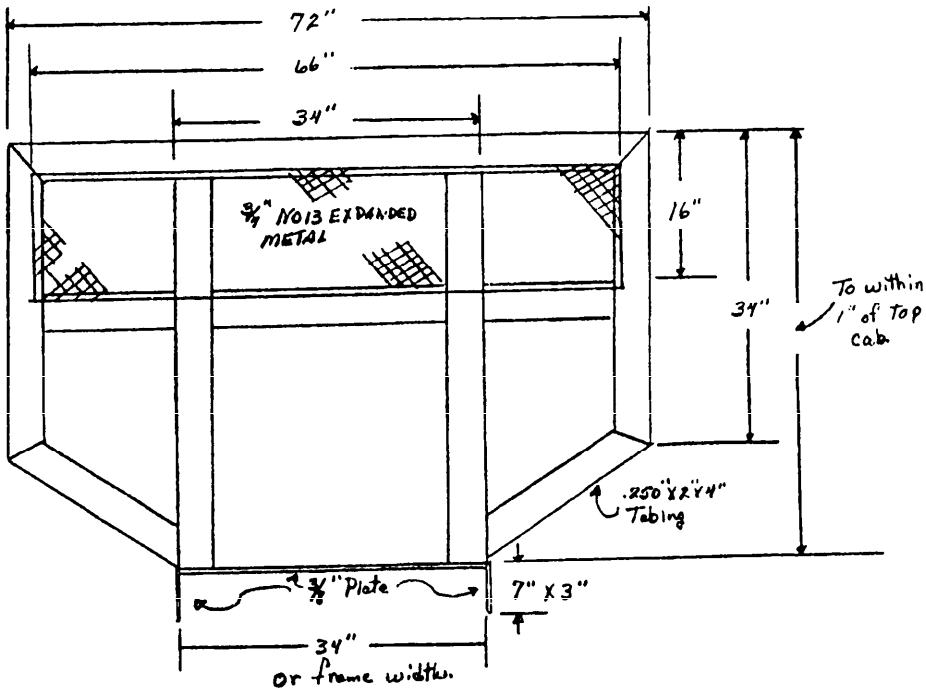

U.S. GOVERNMENT PRINTING OFFICE : 1986 - 491-241/47118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, fold, staple, and mail. to GSA-FSS-FCAE, CMBg. #4, Rm. 420, Wash., DC 20406

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

Federal Specification KKK-F-2201, Firetruck, Wildland, 4x2, 4x4, Gasoline or Diesel Engine, 8,700 lbs. to 27,500 lbs. GVW.

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

GSA DC 69-9761

FORM GSA FEB 69 2200

*U.S. GOVERNMENT PRINTING OFFICE: 1969 O-351-247/7718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.