KKK-T-1725
November 16, 1972

FEDERAL SPECIFICATION

TRUCK, HAND, BOX AND TUB TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers box and tub type hand trucks.

1.2 Classification.

1.2.1 Types, sizes and styles. The hand trucks shall be of the following types, sizes and styles, as specified:

Type I - Box nontilt
Size 6 bushel (7.5 cu. ft.)
8 bushel (9.9 cu. ft.)
10 bushel (12.4 cu. ft.)
12 bushel (14.8 cu. ft.)
14 bushel (17.3 cu. ft.)
16 bushel (19.8 cu. ft.)
18 bushel (22.3 cu. ft.)
20 bushel (24.9 cu. ft.)
Style A - With lid
Style B - Without lid

Type II - Tub, tilt
Size 1/2 cu. yd. (13.1/2 cu. ft.)
1 cu. yd. (27 cu. ft.)
Style A - With lid
Style B - Without lid

Type III - Tub, tilt, light duty
Size 1/2 cu. yd. (13.5 cu. ft.)
1 cu. yd. (27 cu. ft.)
Style A - With lid
Style B - Without lid

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

FF-C-88 -Casters, Rigid and Swivel, Industrial Duty
PPP-B-601 -Boxes, Wood Cleated-Plywood
PPP-C-650 -Crates, Wood, Open and Covered.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superentendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

FSC 3920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.)

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks, and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Methods of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

United States Department of Commerce

Product Standard PS1-66 - Soft Wood Plywood-Construction and Industrial

(Application for copies should be addressed to the Superentendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Society for Testing and Materials (ASTM) Standards:

Method D 635	Test for Flammability of Rigid Plastics over 0.127 cm (0.050 in.) in Thickness
Method D 638	Test for Tensile Properties of Plastics
Mehtod D 648	Test for Deflection Temperature of Plastics Under Load
Mehtod D 747	Test for Stiffness of Plastics by Means of Cantilever Beam
Method D 1044	Test for Resistance of Transparent Plastics to Surface Abrasion
Method D 1238	Measuring Flow Rate of Thermoplastics by Extrusion Plastometer
Method D 1505	Test for Density of Plastics by the Density-Gradient Technique
Method D 1822	Tensile Impact Energy to Break Plastics and Electrical Insulating Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1616 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

American Welding Society (AWS) Standards:

C1.1-50 Recommended Practices for Resistance Welding

(Copies of the American Welding Society publications may be obtained from the American Welding Society, Inc., 345 East 47th Street, New York, NY 10017.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified, (see 6.2), before production is started, a sample of the completely fabricated truck, which shall be identical to the units the supplier proposes to furnish in fulfillment of the requirements of the contract, shall be subjected to the inspection specified herein. No production hand trucks or lot sample shall be delivered prior to approval of the preproduction sample. Prefabrication of hand trucks prior to the approval of the preproduction sample is at the suppliers own risk.

3.2 General requirements.

3.2.1 Description - Type I. The hand truck shown in figure 1 shall provide a reliable unit easily pushed or pulled by hand and steerable. The unit shall consist of two main assemblies: a plastic body (box) and a plastic base with four casters (two fixed and two swivel). The body shall have a nominal volumetric capacity, maximum load, overall dimensions, empty weight, casters diameter and minimum load capacity as specified in table I. When specified (see 6.2) the box shall be fitted with a one-piece plastic lid.

TABLE I Capacity and Dimension of Type I Hand Truck

	Capacity		Overall Dimensions Maximum (inches)			Empty Weight (Lbs.	Casters	
Size	Volume (cu. ft.)	Load (Lbs. Max.)	Length	Width	Height	Min.)	Diameter (Inches)	Minimum Load Capacity Lbs.
6 BU.	7.5	200	33	23	26	22	3	125
8 BU.	9.9	300	37	25	31	30	3	125
10 BU.	12.4	400	39	27	31	44	4	150
12 BU.	14.8	450	39	29	35	51	4	150
14 BU.	17.3	500	43	31	36	60	5	175
16 BU.	19.8	550	43	31	39	62	5	175
18 BU.	22.3	600	45	33	38	67	5	175
20 BU.	24.9	650	51	35	39	74	5	175

3.2.2 Description - Type II. The hand truck shown in figure 2 shall provide a reliable unit easily pushed or pulled by hand and steerable. Dumping of the unit shall be accomplished by lifting up on the rear handle or lip and rotating the unit until the sloped front rests on the floor or edge of a bin into which it is being dumped. A set of "knees" on the frame keeps the unit from moving while being dumped. The unit shall consist of two main assemblies: A plastic body (tub) and a metal support frame with wheels. The main wheels shall be located just forward of the units center of gravity, with one or two swivel casters mounted under the rear of the frame. The tub shall have a nominal volumetric capacity, maximum load, overall dimensions and minimum empty weight as specified in table II. When specified, the tub shall be fitted with a two piece lid hinged in the middle so that either end can be opened while the other end locks under the lip of the tub.

Table II - Capacity and Dimensions of Type II Trucks

	Capacity		Overall dimensions Maximum (inches)			Minimum Empty
Size	Volume (cu. ft.)	Load (Lbs. max.)	Length	Width	Height	Weight (lbs.)
1/2 cu. yd.	13-1/2	500	56	27	38	100
1 cu. yd.	27	1000	71	33	43	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.2.3 Description - Type III. The hand truck shown in figure 3 shall provide a reliable unit easily pushed or pulled by hand and steerable. Dumping of the unit shall be accomplished by lifting up on the rear of the tub and rotating the unit until the sloped front rests on the floor or edge of the bin into which it is to be dumped. A front "bumper" on the frame keeps the unit from moving while being dumped. The unit shall consist of two main assemblies: a plastic body (tub) and a metal support frame with wheels. The main wheels shall be located just forward of the unit's center of gravity, with one swivel caster mounted under the rear of the frame. The tub shall have a volumetric capacity, maximum load, overall dimensions and minimum empty weight as specified in table III. When specified, the tub shall be fitted with a two-piece lid, hinged in the middle so that either end can be opened while the other end locks under the lip of the tub.

TABLE III - Capacity and Dimensions of Type III Trucks

Size	Volume (cu. ft.)	Load (lbs. max.)	Overall dimensions maximum (inches) Length	Width	Height	Minimum Empty weight (lbs.)
1/2 cu. yd.	13-1/2	300	53	27	38	60
1 cu. yd.	27	500	71	33	43	110

3.3 Materials. All materials entering into the final assembly of the truck shall conform to the applicable specifications.

Materials which are not covered by specifications or which are not specifically designated herein shall be of the best quality, of the lightest practicable weight consistent with strength and durability, and entirely suited to the purposes for which intended under all conditions of test and service operation.

3.3.1 The body and lid. The body and lid shall be molded from thermoplastic material. Up to 15 percent of re-ground stock may be used, provided the material properties, as determined in accordance with 4.5.2.1, comply with the appropriate ASTM methods of table IV. All physical property determinations shall be made, using specimens cut from a fabricated sample. The thickness of all wall sections of the body and bottom shall be not less than that indicated in table IV for the applicable type of truck. The material for the lid hinge shall be made of continuous preformed polypropylene or shall be a piano type metal hinge. The color of the body and lid shall be the manufacturer's commercial standard as specified by the purchaser. The lid shall be either the same material and thickness as the box or tub or it shall be of ABS material with a minimum thickness of 0.06 inch.

3.3.2 Support base type I hand truck. The support base shall be fabricated from plywood conforming to Product Standard PS1-66, exterior type, group I, grade B-C or better. The plywood shall have a minimum thickness of 5/8 inch. The support base shall have a grey or black vinyl or equivalent protective coating.

3.3.3 Support frame (types II and III hand trucks). The support frame shall be of all steel construction.

3.3.4 Casters.

3.3.4.1 Type I hand truck. Each of the casters for the type I hand truck shall conform to the requirements of FF-C-88, group A, type I or II, class 2, style 5. They shall have the wheel diameter and load capacities shown in table I.

3.3.4.2 Type II hand truck. The casters of the type II truck shall conform to FF-C-88, group A, type II, class 3, style 5. The exterior metal surfaces shall be zinc or cadmium plated. The wheels of the casters shall be 3-1/2 inches in diameter with a 1-5/6 inch tread width for the 1/2 cu. yd. hand truck and shall be 4 inches in diameter with a 1-5/6 inch tread width for the 1 cu. yd. hand truck. The casters shall be fitted with self lubricated bearings. The casters shall have a minimum load capacity of 200 pounds for both sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.3.4.3 Type III hand truck. The casters of the type III hand trucks shall conform to FF-C-88, group A, type II, class 1, style 5. The wheel of the caster shall be 3 inches in diameter with a 1 to 2-3/4 inch tread width. The minimum load capacity shall be 100 pounds. The wheel of the caster for 1 cu. yd. hand truck shall be 4 inches in a diameter with a 1 to 2 3/4 inch tread width. The minimum load capacity of the casters shall be 200 pounds.

3.3.5 Wheels.

3.3.5.1 Type II hand truck. Each of the main wheels of the truck shall conform to FF-C-88, group A, class 5, style 2. The wheels shall be 10 inches in diameter with a 3/4 to 2-1/2 inch tread width, and capable of withstanding a minimum load capacity of 800 pounds for the 1/2 cu. yd. size. They shall be 12 inches in diameter with a 3/4 to 2-1/2 inch tread width and capable of withstanding a minimum load capacity of 950 pounds for the 1 cu. yd. size hand truck. The wheels shall have roller bearings with a lubrication fitting. The hubs shall have a corrosion resistant coating such as zinc plate, cadmium plate, or enamel.

3.3.5.2 Type III hand truck. The wheels of the type III hand truck shall have rubber tires and permanently lubricated bearings. The wheels of the 1/2 cu. yd. size hand truck shall be 10 inches in diameter with a 1 to 2-3/4 inch tread width, capable of withstanding a minimum load capacity of 160 pounds. The wheels of the 1 cu. yd. hand truck shall be 12 inches in diameter, with a 1 to 2-3/4 inch tread width, and capable of withstanding a minimum load capacity of 350 pounds.

TABLE IV - Material Properties

Characteristics	ASTM METHOD	VALUES TYPE I	VALUES TYPE II and III
Specific Gravity	D1505	0.920 ± 0.002	0.950 ± 0.002
Melt Index, 9/10 min. max.	D1238	6.0	6.0
Tensile Yield (2"/min.) # min.	D638	1250	2500
Ultimate Elongation (2"/min.) # min.	D638	350	400
Stiffness Modulus, psi. min.	D747	22,000	60,000
Flammability (0.180" - 0.200" thick bar) in./min. max.	D635	1.0	1.0
Tensile Impact (1/8" thick bar) ft-lb/sq. in. min.	D1822	70.0	65.0
Heat Deflection Temperature (66 psi) °F min.	D648	115	135
Abrasion Resistance mg/1000 cycle max.	D1044	60.0	15.0
Material thickness (inch)	para 4.5.1.4	0.180-0.00	0.200-0.00

3.4 Construction.

3.4.1 Type I hand truck.

3.4.1.1 Support base. The plywood support base shall be of a solid one-piece construction with a size to support the total base of the plastic box. The corners of the support base shall be rounded.

3.4.1.2 Box. The box shall be of a solid, one-piece construction. The corners and edges shall be rounded. The top lip shall be rolled outward. The top lip shall be reinforced with a tubular steel rod not less than 16 gauge and 7/8 inch in diameter when the box lip material is less than 0.225 inch in thickness. The rod shall be free floating so as to absorb shock without damaging the top of the truck. The box shall be securely fastened to the support base.

3.4.2 Type II hand truck.

3.4.2.1 Support frame. The support frame shall be fabricated from 1 inch square and 7/8 inch round tubing having a minimum thickness of 16 gauge. The axle shall be 1 inch square tubing with a minimum thickness of 11 gauge with a 3/4 inch shaft welded in place. All fixed joints of support frame shall be welded in accordance with AWS C1.1-50. After final assembly, the support frame shall be thoroughly cleaned of loose, splattered or excess metal chips, flux or other foreign matter. Burrs and sharp edges shall be removed. The support frame shall be given a corrosion resistant coating of zinc plating or a primer coating followed by a black enamel finish coat, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.4.2.2 Handle. The handle depicted in figure 2 shall be a minimum of 13 inches wide by 4 inches deep and attached to the frame 33 to 35 inches above the floor (with the truck resting on both wheels and casters).

3.4.2.3 Tub. The tub shall be of a seamless one-piece construction. The corners and edges shall be rounded. The top lip shall be rolled outward. The tub shall be secured to the frame with bolts and nuts, spaced around the periphery of the top lip and extending down through the top frame member, or may be secured in place with a spring loaded sliding latch.

3.4.3 Type III hand truck.

3.4.3.1 Support frame. The support frame shall be fabricated from 1 inch square and 1 inch round tubing, having a minimum thickness of 11 gauge. The axle shall be 3/4 inch in diameter. All fixed joints of support frame shall be welded in accordance with AWS C1.1-50. After final assembly, the support frame shall be thoroughly cleaned and provided with a corrosion resistant finish as required for type II hand trucks in 3.4.2.1.

3.4.3.2 Tub. The tub shall be of a seamless one-piece construction. The corners and edges shall be rounded and the top lip shall be rolled outward. The tub shall be secured to the frame by bolting through the bottom of the tub to the frame with nuts and bolts.

3.5 Load capacity. When operated in accordance with 4.5.2.2 the truck shall withstand the load and operation without cracking, breaking, bending, twisting or other deformation or damage.

3.6 Performance handling. When operated in accordance with 4.5.2.3, the truck shall be capabable of manipulation by one employee without undue strain or excessive effort. The force required to push or maneuver shall be not greater than 32 pounds.

3.7 Hinge for lid on type II and III trucks. The polypropylene hinge or piano type metal hinge shall be attached to the two sections of the lid (by sonic welding, fusion cement, rivets, etc.) so that when tested in accordance with 4.5.2.4, the hinge and lid shall show no signs of separating, splitting, cracking, or other evidence of failure.

3.8 Identification Label. Each hand truck shall have a pressure sensitive identification label affixed to a conspicuous area of the base or frame. The label shall be legibly stamped, printed or otherwise permanently marked with letters 1/8 inch minimum in height and in a color contrasting to the label, as follows:

TRUCK, HAND, (BOX OR TUB) TYPE
KKK-T-1725
Capacity: ( ) cu. ft.; volume; ( ) lbs.
max. load.
(Contract or Purchase Order No.)
(Manufacturer's Name and Address)

3.9 Workmanship. All workmanship shall be in accordance with the highest commercial standards and practices for this type of equipment. The interior surfaces of the body and lid shall be smooth and free of all cracks, crevasses and recesses wherein dirt or foreign matter might collect. The completed truck shall be free from all defects which may impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for performance of all inspection requirements as specified herein. Except as otherwise specified the supplier may use his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

4.2 Sampling. Each lot of trucks shall be sampled for inspection in accordance with MIL-STD-105, Inspection Level II, Single Sampling. For purposes of inspection, a lot shall consist of all units of one type offered for delivery at one time.

The preproduction sample shall consist of the minimum number of units necessary to perform all tests specified herein.

4.3 Material testing and service testing. Testing (see 4.5.2.1, 4.5.2.2, 4.5.2.3, and 4.5.2.4) shall be conducted on the preproduction sample and thereafter once for each new contract.

4.4 Acceptance. Approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of the responsibility for the compliance with all provisions of this specification of all units subsequently offered for delivery.

Except as provided in 4.3, each sample unit shall be subjected to the inspection described in the following paragraphs. Acceptance shall be based on an Acceptable Quality Level (AQL) of 4.0. The supplier shall submit certified inspection reports with each lot offered for delivery. A check list shall be prepared and used to indicate the compliance of each unit with all specified requirements.

4.5 Procedures.

4.5.1 Examinations. Each truck shall be visually examined to ascertain its condition with respect to general configuration, components, fittings, color, finish, and fabrication techniques.

4.5.1.1 Dimensions. Measure the overall size of the truck. Record the dimensions.

4.5.1.2 Weight. Weigh the truck. Record the weight in pounds.

4.5.1.3 Volume. Measure the inside dimensions of the box or tub. Calculate the volume. Record the dimensions and the calculated volume.

4.5.1.4 Thickness. Measure the wall thickness at four points on each of the five major faces of the plastic box or tub. The average of the four measurements shall not be less than the specified thickness with no single measurement less than the minimum thickness specified. Record the locations and thicknesses on a sketch of the truck.

4.5.2 Tests. All tests shall be performed in and at a nominal temperature of 73°F.

4.5.2.1 Material properties. Each of the listed properties shall be determined in accordance with the indicated method. Specimens used may be prepared from a box or tub molding which for reasons not affecting strength has been rejected for the use in a finished truck. (See table IV).

Property	ASTM Method
Specific Gravity	D 1505
Melt Index	D 1238
Tensile Yield Strength	D 638
Ultimate Elongation	D 638
Stiffness Modulus	D 747
Flammability	D 635
Tensile Impact	D 1822
Heat Deflection Temperature	D 648
Abrasion Resistance	D 1044 Modified*

*Weigh each specimen to the nearest 0.5 mg. before and after 1000 cycles of abrasion. Report weight loss.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

4.5.2.2 Load. Using suitable material arranged to occupy as much of the volume of the body as possible (at least 80%), load the truck to its maximum load capacity. At any convenient speed, push the truck around the perimeter of a nominal square 25 feet per side. (Type II and III - Tilt the truck; dump the load; return it to its upright position). Examine the truck for any evidence of cracking, breaking, bending, twisting, or other deformation or damage. Record observations and all evidence of damage.

4.5.2.3 Handling. Load the truck to one half its load capacity with a suitable material. Have typical, average-sized employee (Male or Female) push the truck around the perimeter of a nominal square 50 feet per side on a floor with a surface equivalent to a warehouse-grade wood block construction. Negotiate a figure-8 pattern. (Type II and III - Tilt the truck; dump the load; return the truck to the upright position. Measure and record the force required to perform each function or maneuver.

Evaluate the truck for ease of handling and effort required to operate. Record evaluation.

4.5.2.4 Hinge. (Lid for type II and III truck). With lid positioned on truck, one side of lid should be raised to a 45 degree position from the horizontal for 1000 times. This can be accomplished by a motor driven mechanical mechanism. After test, examine hinge for evidence of damage. Record observations and all evidence of damage.

4.6 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table V. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE V - Examination of Preparation for Delivery

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any nonconforming component; component missing or damaged.
Workmanship	Inadequate application of components such as lumber blocking, bracing, cleats, and burlap backed felt.
Contents	Number per container is more or less than required.

4.6.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601, examination for defects in strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2)

5.1.1 Level A

5.1.1.1 Type I hand truck. Four trucks, of one size only, shall be nested into one another. Prior to nesting, the casters shall be covered with a piece of burlap backed jute felt approximately 1/2 inch thick and the ends of the felt securely fastened to the caster with wire or twine. The casters on the bottom truck shall be left uncovered. Alternative to covering casters with felt, a fiberboard pad shall be placed in the bottom of the three lower most trucks to prevent casters from contacting the adjacent trucks. The size of the fiberboard pad shall be not less than 1/2 inch less than the inside dimensions of the bottom of the truck.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:46Z
Check the source to verify that this is the current version before use.

5.1.1.2 Type II and III hand truck. Two trucks in a completely assembled condition shall be packaged in accordance with Method III of MIL-P-116 or four trucks in a disassembled condition shall be packaged as follows: Tubs (detached from frames), of one size only shall be nested into one another. The frames (with wheels and casters removed) shall be nested as much as practical. Hardware shall be placed in a heavy kraft paper bag and stapled to prevent loss. Wheels, casters, and hardware shall be in the same package with the frames.

5.1.2 Level C. Trucks shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I hand truck. Four trucks, packaged as specified in 5.1.1, shall be packed in a snug-fitting cleated plywood shipping container conforming to overseas type, type 3 load of PPP-B-601. Lumber, blocking, and bracing shall be provided under the nested trucks to provide a minimum 1/2 inch clearance between the casters and bottom of the container. Shipping containers exceeding 250 pounds gross weight shall be provided with skids in accordance with PPP-B-601. Closure and strapping shall be in accordance with the appendix to PPP-B-601.

5.2.1.2 Type II and III hand truck. Two assembled trucks or four tubs (from disassembled trucks), packaged as specified in 5.1.2 shall be packed in a snug-fitting cleated plywood shipping container conforming to overseas type, type 3 load of PPP-B-601. Lumber, blocking and bracing shall be provided as needed to provide a securely packed container. Frames, wheels, casters, and hardware (from disassembled trucks) as specified in 5.1.1.2 shall be packed the same as the tubs. Shipping containers exceeding 250 pounds gross weight shall be provided with skids in accordance with PPP-B-601. Closure and strapping shall be in accordance with the appendix to PPP-B-601.

5.2.2 Level B.

5.2.2.1 Type I hand truck. Trucks, packaged as specified in 5.1.1.1, shall be packed as specified in 5.2.1.1, except that shipping containers shall conform to types I or IV of PPP-C-650, with height and weight limitations not to be exceeded; or domestic type, style A or B of PPP-B-601.

5.2.2.2 Type II and III hand truck. Assembled trucks or disassembled tubs, frames, wheels, casters, and hardware packaged as specified in 5.1.1.2, shall be packed as specified in 5.2.1.2, except that shipping containers shall conform to types I or IV of PPP-C-650, with height and weight limitations not be exceeded; or domestic type, style A or B of PPP-B-601.

5.2.3 Level C. Trucks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers and packing shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special markings required by the contract or order (see 6.2), the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special markings required by the contract or order (see 6.2), shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The hand trucks covered by this specification are intended to be used for handling of bulk materials (such as laundry, mail, etc.) and the removal of office trash and litter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options submitted herein and included the following information in the procurement documents.

a. Title, number, and date of this specification.

b. The number of trucks to be produced and the schedule of delivery.

c. Type, size, and style (see 1.2).

d. Color (see 3.6.1.5).

e. Requirement for a preproduction sample (see 3.1).

f. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

Preparing activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

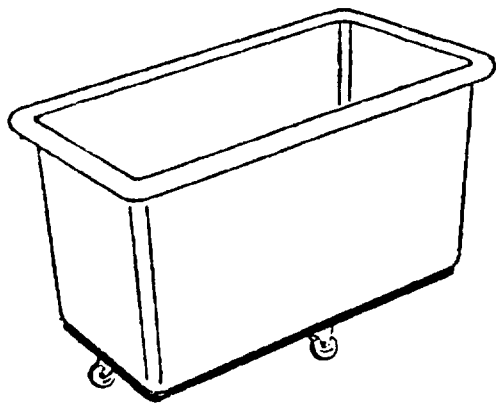


FIGURE 1

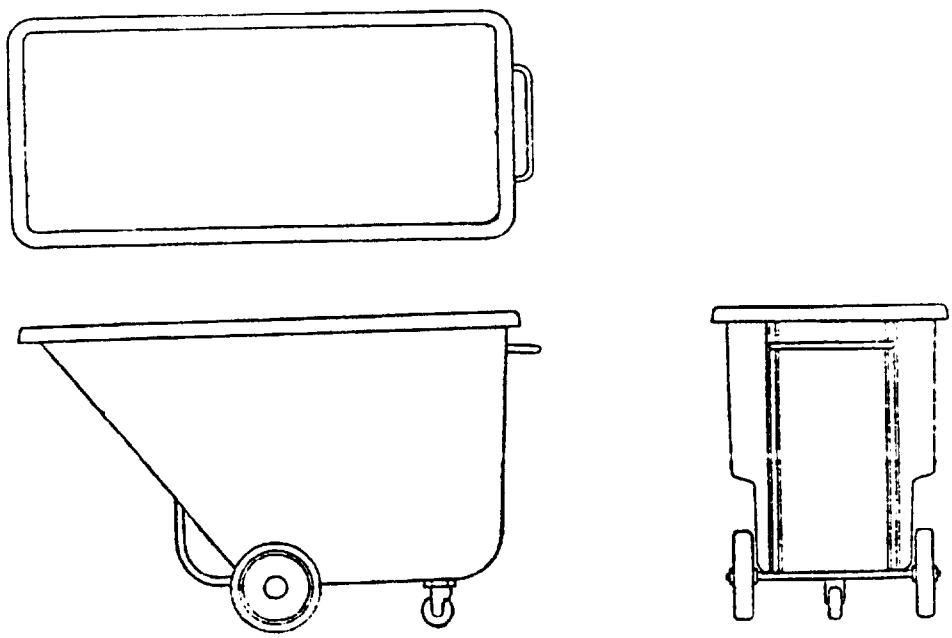


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

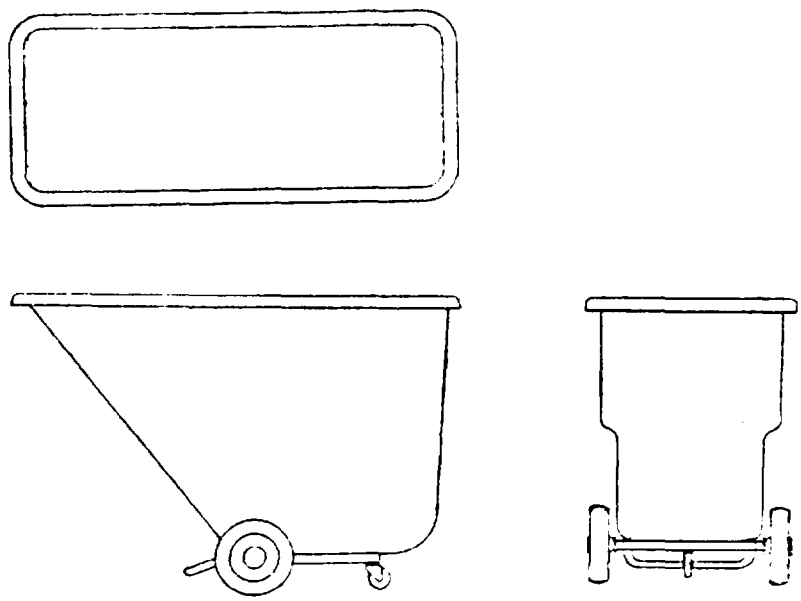


FIGURE 3

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See action 2 of this specification to obtain extra copies and other documents referred herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.