
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE V (N), HIGH POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

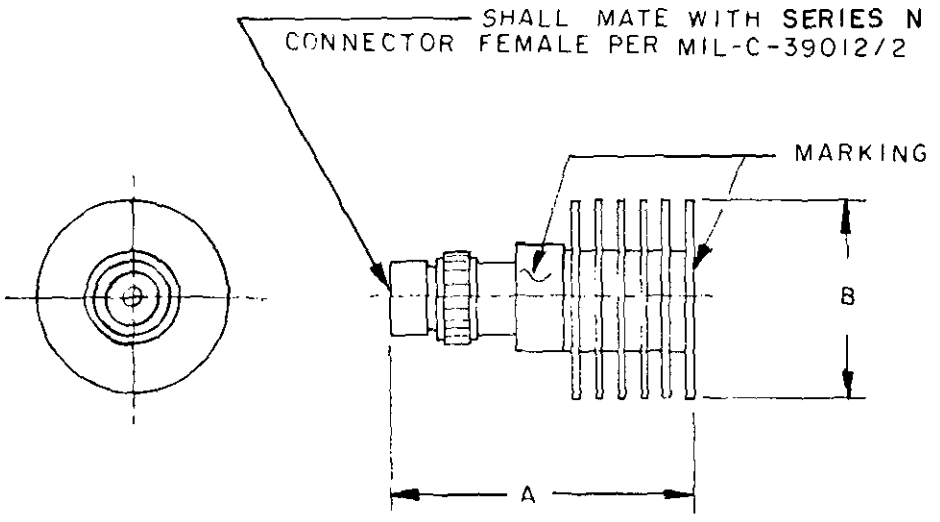

Dash number	A	B
01	4.61 ±.06	1.63 ±.03
02	5.06 ±.03	1.63 ±.03


INCHES	MM
.02	.5
.03	.8
.06	1.5
1.63	41.4
4.61	117.1
5.06	128.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, part numbers M39030/11-01 and -02.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

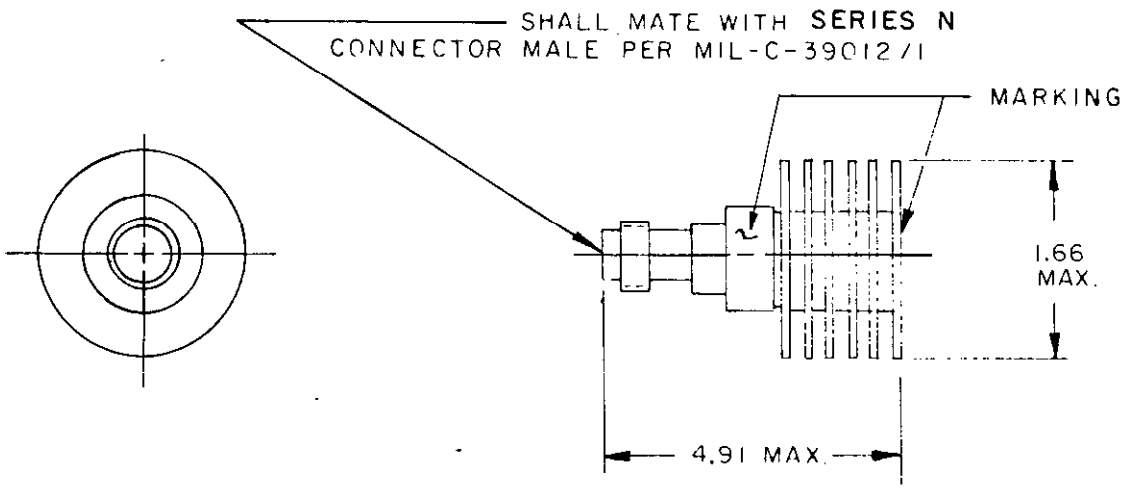


INCHES	MM
1.66	42.2
4.97	124.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, part number M39030/11-03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

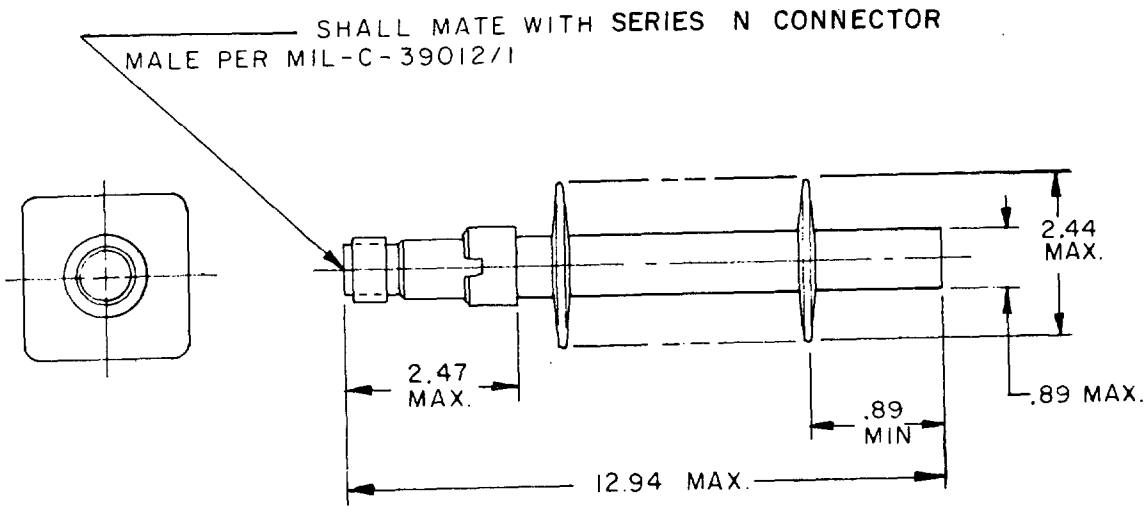

INCHES	MM
.89	26.6
2.44	62.0
2.47	62.7
12.94	328.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, part number M39030/11-04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance	Weight (max)	Finish	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01	DC to 8.0	1.10:1 (DC to 1.0 GHz) 1.20:1 (1.0 to 4.0 GHz) 1.40:1 (4.0 to 8.0 GHz)	50 1/	5.0K 1/	50	10	Body 2/ Connector 3/	1
02	DC to 10.0	1.10:1 (DC to 4.0 GHz) 1.30:1 (4.0 to 10.0 GHz)	40 1/	7.5K 1/		10		1
03	DC to 10.0	1.10:1 (DC to 4.0 GHz) 1.30:1 (4.0 to 10.0 GHz)	40 1/	7.5K 1/		10		2
04	.7 to 18.0	1.20:1	175 1/	10K 1/		40		3

1/ Power input is derated linearly from 100 percent at +25°C to 10 percent at specified maximum ambient operating temperature.
2/ Anodized per MIL-A-8625.
3/ Gold plated per MIL-G-45204, type II, class 2.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 3.

Electrical characteristics: See table I.

Materials:

Body: Aluminum alloy per QQ-A-225.

Finish: See table I.

Connector: Corrosion-resistant steel per QQ-S-763.

Finish: See table I.

Contact pin and contact socket: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01 thru 03 - -55°C to +125°C.
Dash number 04 - -55°C to +160°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

Nonoperating (storage):

Dash numbers 01 thru 03 - -65°C to +125°C.
Dash number 04 - -65°C to +175°C.

Part number: M39030/11-(dash number from table I).

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	80063	SM-C-920979-5	
01	18203	T90ON	
02	81755	C4716-1	
02	99899	376NM	
03	81755	C4716-2	
03	99899	376NF	5985-00-241-3518
03	19315	QB90622-2	5985-00-241-3518
04	50985	8828500005-1	
04	99899	369BNF	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0925-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.