
MILITARY SPECIFICATION SHEET

DUMMY LOAD, ELECTRICAL, TYPE XIV (SOCKET CONTACT), STRIPLINE, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the dummy load described herein shall consist of this specification and the latest issue of MIL-D-39030.

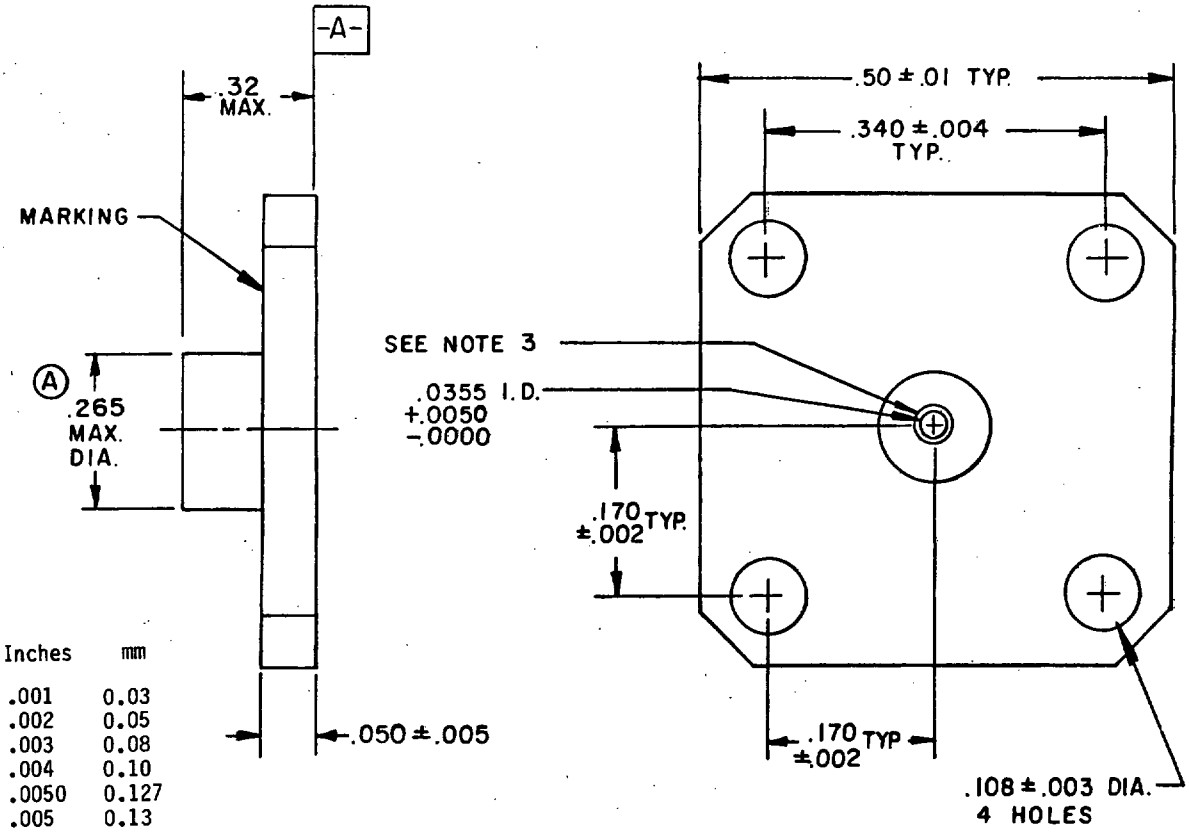

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.004	0.10
.0050	0.127
.005	0.13
.01	0.3
.020	0.81
.0355	0.902
.050	1.27
.065	1.65
.108	2.74
.170	4.32
.22	5.6
.32	8.1
.340	8.6
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Socket contact is recessed .020 ±.003 from surface "A".

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Electrical characteristics:

Operating frequency: DC to 12.4 GHz.

Voltage standing wave ratio (VSWR): 1.25:1, maximum at 12.4 GHz.

Power:

Average: 1 watt, Average power input is specified at a heat sink temperature of +60°C, and is derated linearly from 100 percent at +25°C to 12.5 percent at +125°C.

(A) Peak: 200 watts. Peak power input is specified at a heat sink temperature of +60°C and 200 watts maximum at 10 microseconds pulse with a .1 percent duty cycle, and is derated linearly from 100 percent at +25°C to 12.5 percent at +125°C. Average power during peak power application shall not exceed maximum average power.

Nominal characteristic impedance: 50 ohms.

Materials:

Body: Aluminum alloy per QQ-A-225 for dash number 01.
Brass per QQ-B-626 for dash number 02.

Finish: Gold plated per MIL-G-45204, type II, class 2 for dash number 01.
Nickel per QQ-N-290, class 1 for dash number 02.

Socket contact: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: .18 ounce, maximum.

Ambient temperature range:

Operating: -55°C to +125°C.

Nonoperating (storage): -65°C to +150°C.

Part number: M39030/13-01.

NOTE: The dummy load covered by this specification sheet is substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	NSN
01	23991	R4443P1	
01	24602	8540	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AV
Navy - OS, SH
Air Force - 17, 85
DLA - ES

User activities:
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0996-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.