
MILITARY SPECIFICATION SHEET

# DUMMY LOADS, ELECTRICAL, TYPE XIV (TAB CONTACT), STRIPLINE, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the dummy loads described herein shall consist of this specification and the latest issue of MIL-D-39030.

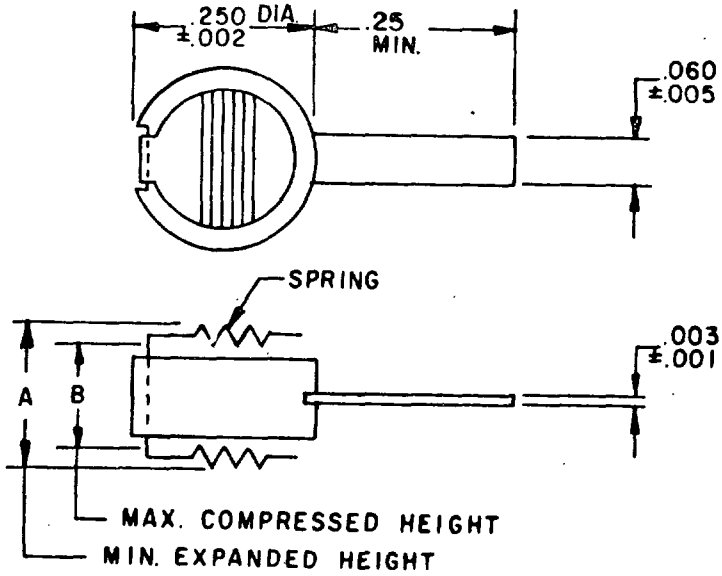


| Dash number | A | B |
|---|---|---|
| 01 | .265 | .246 |
| 04 | .140 | .121 |

| Inches | mm |
|---|---|
| .001 | 0.03 |
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .060 | 1.52 |
| .121 | 3.07 |
| .140 | 3.56 |
| .246 | 6.25 |
| .250 | 6.35 |
| .25 | 6.4 |
| .265 | 6.73 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.


FIGURE 1. Dimensions and configuration, part numbers M39030/20-01 and -04.

Ⓐ denotes changes


FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.


| Inches | mm |
|---|---|
| .001 | 0.03 |
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .010 | 0.25 |
| .060 | 1.52 |
| .062 | 1.57 |
| .125 | 3.18 |
| .156 | 3.96 |
| .25 | 6.4 |

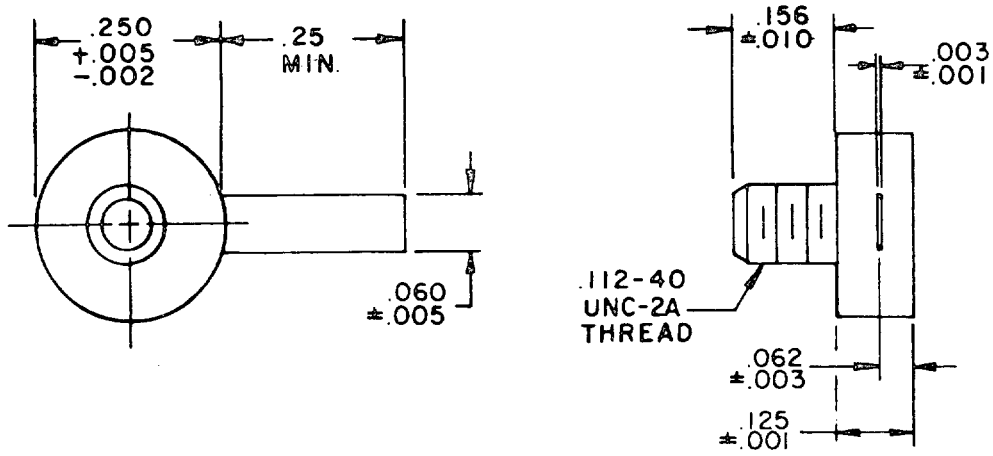


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configuration, part number M39030/20-02.

| Inches | mm |
|---|---|
| .001 | 0.03 |
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .02 | 0.5 |
| .060 | 1.52 |
| .063 | 1.60 |
| .090 | 2.29 |
| .26 | 3.20 |
| .250 | 6.35 |

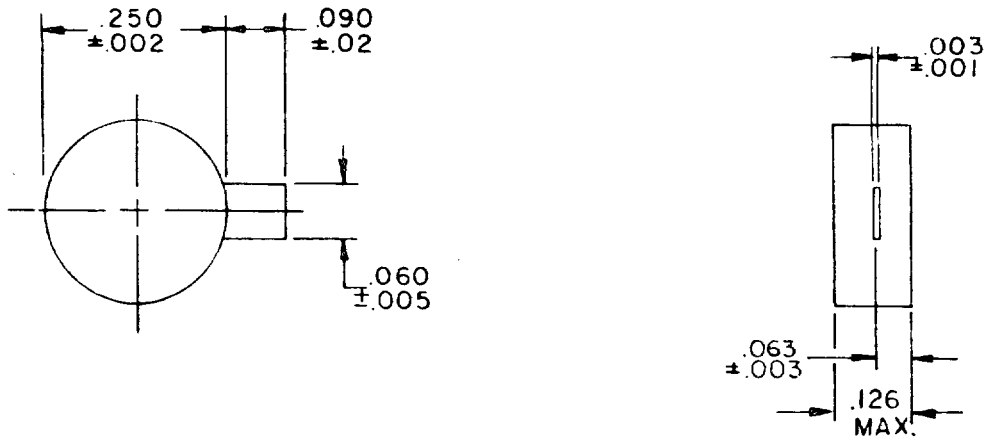



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 3. Dimensions and configuration, part number M39030/20-03.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

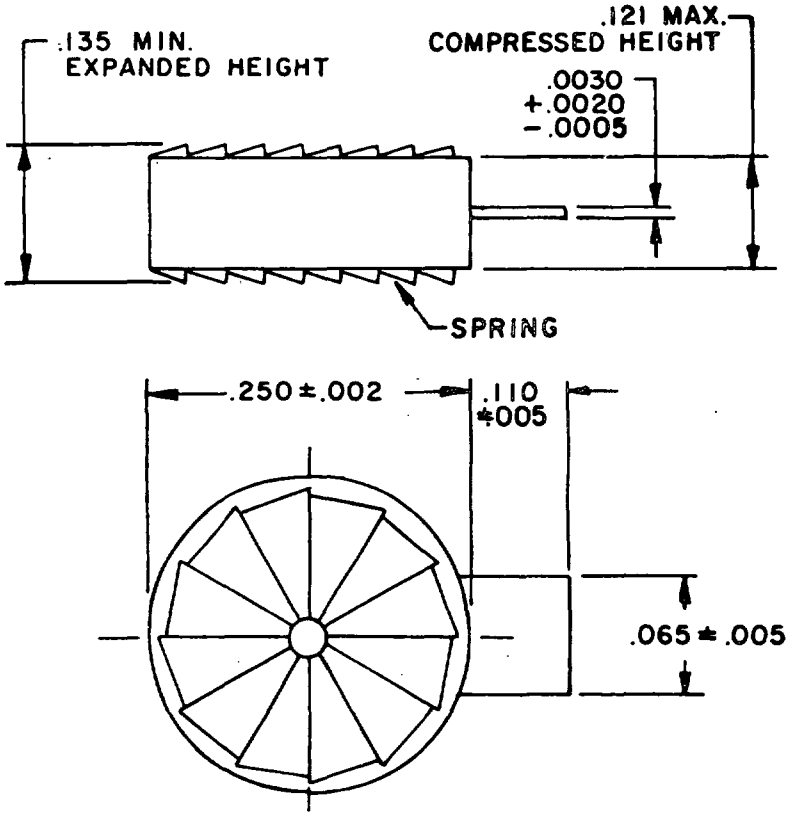



| Inches | mm |
|---|---|
| .0005 | 0.013 |
| .002 | 0.05 |
| .0020 | 0.051 |
| .0030 | 0.076 |
| .005 | 0.13 |
| .065 | 1.65 |
| .110 | 2.79 |
| .121 | 3.07 |
| .135 | 3.43 |
| .250 | 6.35 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Dimensions and configuration, part number M39030/20-05.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

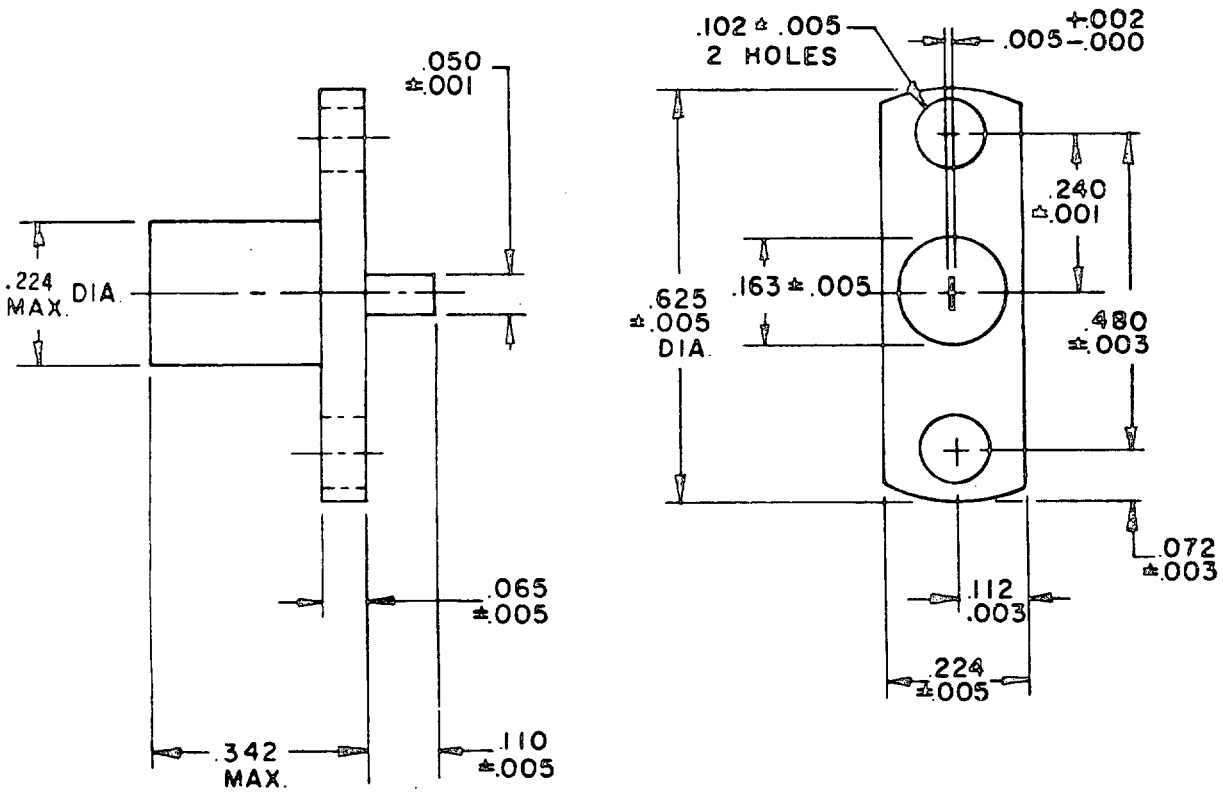


| Inches | mm |
|---|---|
| .001 | 0.03 |
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .050 | 1.27 |
| .065 | 1.65 |
| .072 | 1.83 |
| .102 | 2.59 |
| .110 | 2.79 |
| .112 | 2.84 |
| .163 | 4.14 |
| .224 | 5.69 |
| .240 | 6.10 |
| .244 | 6.20 |
| .342 | 8.69 |
| .480 | 12.19 |
| .625 | 15.88 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Dimensions and configuration, part number M39030/20-06.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dash numbers and characteristics.

| Dash number | Operating frequency | VSWR (max) | Power handling capability (max) | | Duty Cycle | Nominal characteristic impedance | Weight (max) | Finish | Figure number |
|---|---|---|---|---|---|---|---|---|---|
| | | | Average | Peak | | | | | |
| | GHz | | Watts | Watts | % | Ohms | Oz | | |
| 01 | DC to 6.0 | (1.20 + .025f):1 1/ | 1.0 2/ | 0.1K 2/ | 1 | 50 | .053 | Body 5/ | 1 |
| 02 | DC to 12.0 | (1.10 + .025f):1 1/ | 1.0 2/3/ | 0.1K 2/3/ | 1 | " | .070 | " | 2 |
| 03 | DC to 12.0 | (1.10 + .025f):1 1/ | 1.0 2/ | 0.1K 2/ | 1 | " | .020 | " | 3 |
| 04 | DC to 12.4 | 1.10.1 (DC to 4.0 GHz)<br>1.25:1 (4.0 + 8.0 GHz)<br>1.35:1 (8.0 to 12.4 GHz)<br>1.20:1 (DC to 8.0 GHz) | 1.0 2/ | 0.1K 2/ | 1 | " | .021 | " | 1 |
| 05 | DC to 12.4 | 1.35:1 (8.0 to 12.4 GHz) | 0.5 | 0.5K | .1 | " | .022 | " | 4 |
| 06 | DC to 18.0 | 1.25:1 | 1.0 4/ | 1.0K 4/ | .1 | " | .15 | " 6/ | 5 |

1/ Where f is the frequency in GHz.
2/ Power input is specified at +25°C.
3/ Power input is derated linearly to 10 percent at +125°C.
4/ Power input is specified at +71°C.
5/ Gold plated per MIL-G-45204, type II, class 2.
6/ Nickel plated per QQ-N-290.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 5.

Electrical characteristics: See table I.

Materials:

Body: Brass per QQ-B-626, QQ-B-637, QQ-B-639, or QQ-B-613.

Finish: See table I.

Tab contact: Brass per QQ-B-626, QQ-B-637, or QQ-B-639.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Spring: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

Ambient temperature range:

Operating:

Dash numbers 01 through 04: -55°C to +125°C.

Dash number 05: -55°C to +85°C.

Dash number 06: -55°C to +71°C.

Nonoperating (storage):

Dash numbers 01, 02, and 04: -65°C to +150°C.
Dash numbers 03, 05, and 06: -65°C to +125°C.

Solderability: Method 208 of MIL-STD-202; the following details and exception shall apply:

a. Number of terminations of each part to be tested: One contact.

b. Special preparation of terminations: No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.

c. Depth of immersion: The entire surface of the contact shall be covered.

d. Method of mounting: The dummy load shall be mounted onto a heat sink.

e. Examination of terminations: There shall be no evidence of pinholes and blistering.

NOTE: This test shall be performed after the visual and mechanical inspection in qualification.

Part number: M39030/20-(dash number from table I).

NOTE: The dummy load covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

| Dash number | Manufacturer's code | Manufacturer's part number | NSN |
|---|---|---|---|
| 01 | 05869 | 723873-2 | |
| 01 | 24602 | 02-250-T | |
| 01 | 95077 | 100-0028 | |
| 02 | 23991 | R4444 | |
| 02 | 24602 | 08-125-T | 5985-01-032-0105 |
| 02 | 94990 | 58-P0426F005 | 5985-01-032-0105 |
| 03 | 19202 | 11716519 | |
| 03 | 24602 | 01-125-T | |
| 04 | 49956 | 912566 | |
| 04 | 24602 | 02-125-T | |
| 04 | 05869 | 723873-1 | |
| 04 | 95077 | 100-0027 | |
| 05 | 97942 | 582R018H01 | |
| 05 | 13327 | 69.7 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

| Dash number | Manufacturer's code | Manufacturer's part number | NSN |
|---|---|---|---|
| 06 | 32562 | 341-2000-020 | |
| 06 | 19136 | UTLSK01213T | |

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AV
Navy - OS, SH
Air Force - 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

Project 5985-0996-6)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.