
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL COAXIAL
TYPE I (SMA), MEDIUM POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

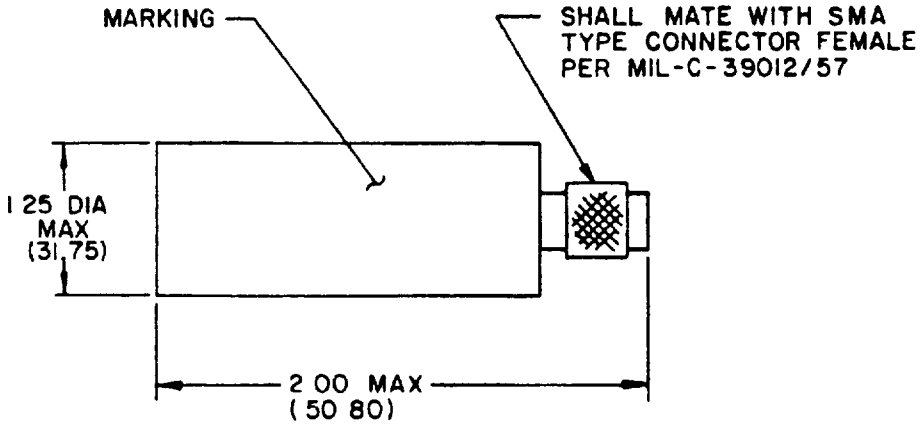

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. All undimensioned pictorial configurations are for reference purposes only.

FIGURE 1. Dimensions and configuration.

PSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure.

Operating frequency DC to 12.4 GHz.

Impedance 50 ohms nominal.

DC resistance 50 ±2.0 ohms

Power handling capability Derated linearly to 10 percent at 125°C.
Average - 10 watts.
Peak - 3 kilowatts

Overload. 20 watts for 1 minute.

Material See table I.

Operating temperature range: -55°C to 125°C.

Voltage standing wave ratio (VSWR) 1.30 : 1 maximum (test frequency range .5 to 12.4 GHz)

Force to engage and disengage Torque 2 inch-pounds, maximum.

Coupling proof torque 15 inch-pounds, minimum

Threaded coupling connector For each test of threaded coupling connector where the test is performed on mated pairs, the pairs shall receive 7 to 10 inch-pounds torque

Connector durability 500 cycles at 12 cycles per minute maximum. After this test the connector shall meet the engage and disengage requirement

Barometric pressure Test condition C

Weight, maximum See table I.

Part number M39030/4 -and dash number from table I.

TABLE I Dash number, material, and weight

Dash number	Housing	Connector	Weight
			ozs.
01	Aluminum per QQ-A-225/6 or equivalent	Corrosion resistant steel per QQ-S-763, series 300, passivated	3
02	Corrosion resistant steel per QQ-S-763	Beryllium copper per QQ-C-530	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:49Z
Check the source to verify that this is the current version before use.

NOTE The dummy loads covered by this specification are substitutable for the following commercial type

Dash no.	FSN	Manufacturer's code	Commercial type
-01	5985-192-0144	99899	4375M
-01	---	16301	8205M
-01	---	07397	73-805183-4
-01	---	05869	712408-1
-01	---	99899	23975

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - MI
Navy - SH, OS
Air Force - 17, 80, 85
DSA - ES

User activities
Army - AV
Navy - MC, AS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5985-0799-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:49Z
Check the source to verify that this is the current version before use.