
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE IV (TNC), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

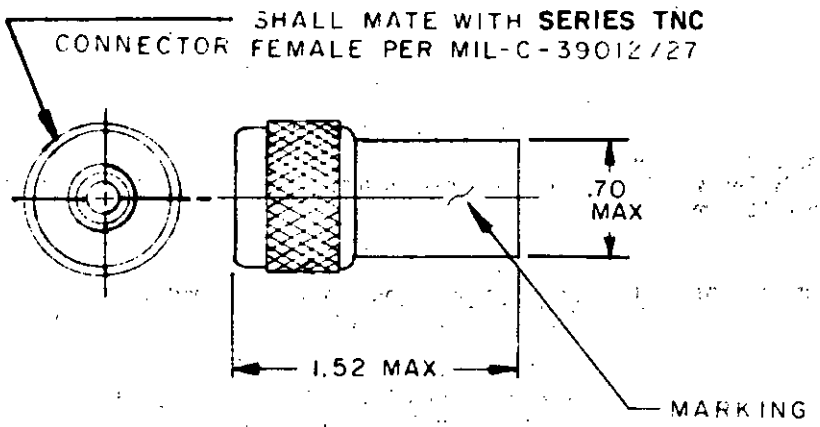


INCHES	MM
.70	17.8
1.52	38.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, part number M39030/5-01.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

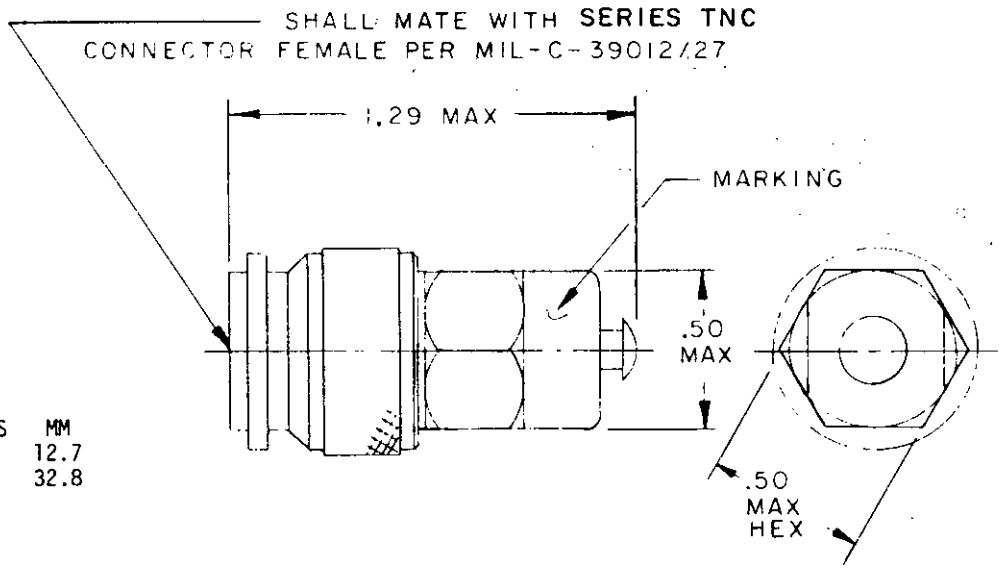

INCHES	MM
.50	12.7
1.29	32.8

NOTES:
1. **Dimensions are in inches.**
2. **Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.**

FIGURE 2. Dimensions and configuration, part number M39030/5-02.

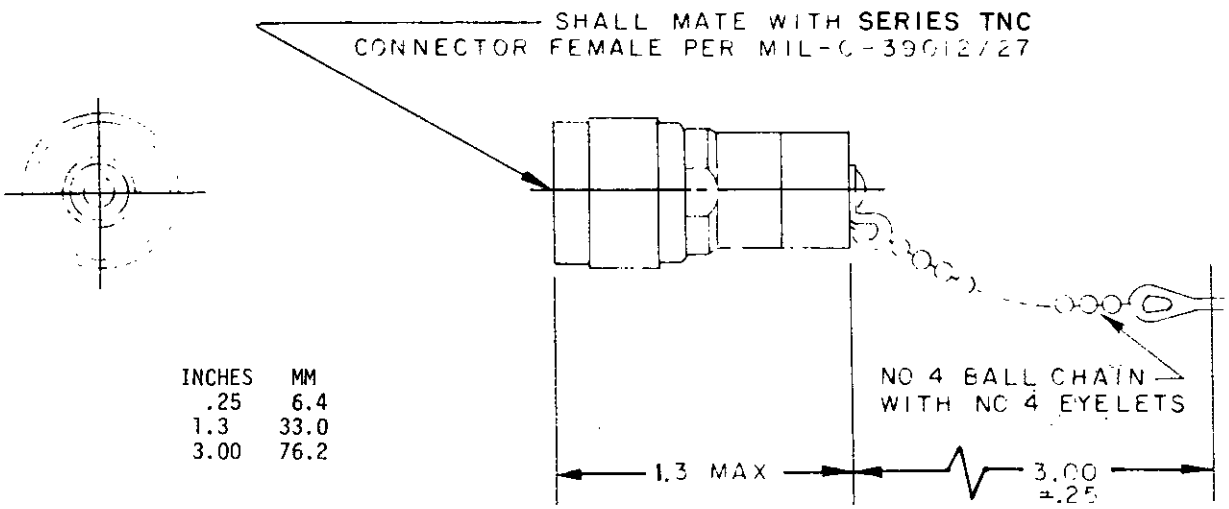


INCHES	MM
.25	6.4
1.3	33.0
3.00	76.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, part number M39030/5-03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

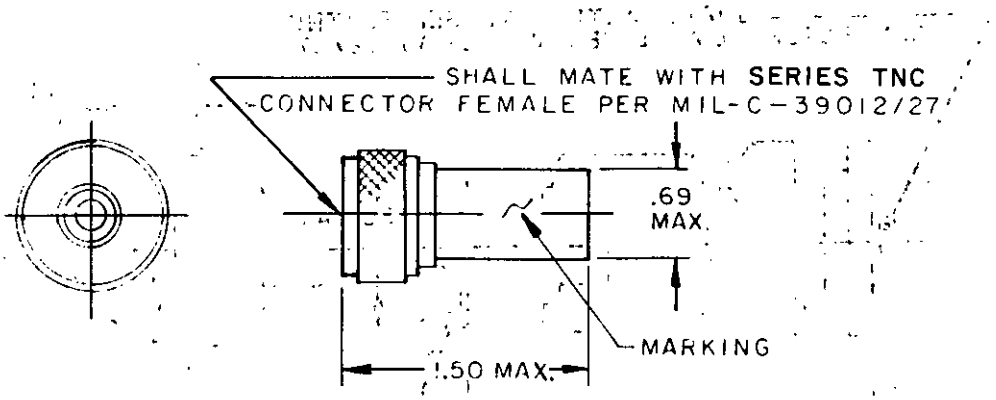

INCHES	MM
.69	17.5
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 4. Dimensions and configuration, part number M39030/5-04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance	Weight (max)	Finish	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01 1/	DC to 10.0	1.40:1	5.0 2/	6.0K	50	3.0	Gold plated per MIL-G-45204, type II, class 2	1
02	.06 to .08	1.12:1	.5	.6K	75	1.3		2
03	DC to 10.0	1.15:1	2.0	2.5K	50	.4		3
04	DC to 10.0	1.05:1 (DC to 2.4 GHz) 1.20:1 (2.4 to 10.0 GHz)	5.0 2/	6.0K 2/	50	3.0		4
05	DC to 11.0	1.10:1	3	1K	51	.4	Passivated per QQ-P-35	5
06	.03 to 12.4	1.10:1	1.0	1.2K	50	.4	Nickel plated per QQ-N-290	6
07	.03 to 12.4	1.10:1	1.0	1.2K	50	.4	Nickel plated per QQ-N-290	7

1/ This dash number shall be used for a replacement part only. For new design, dash number 04 shall be used.
2/ Power input is derated linearly from 100 percent at 25°C to 25 percent at specified maximum ambient operating temperature.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 7.

Electrical characteristics: See table I.

Materials:

Body and connector: Corrosion-resistant steel per QQ-S-763.

Finish: See table I.

Contact pin and contact socket: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Bead chain and lug: Corrosion-resistant steel or plastic.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01, 03, 06, and 07 - -55°C to +125°C.
Dash number 02 - -46°C to +71°C.
Dash number 04 - -62°C to +71°C.
Dash number 05 - -54°C to +125°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Nonoperating (storage):

Dash numbers 01, 03, 06, and 07 - -65°C to +125°C.
Dash number 02 - -57°C to +85°C.
Dash number 04 - -62°C to +85°C.
Dash number 05 - -54°C to +150°C.

Connector tests: The following tests shall be performed after visual and mechanical examination in qualification and group A inspections:

Threaded coupling torque: 2 inch-pounds, maximum.

Coupling tightening torque: 15 inch-pounds, minimum.

Barometric pressure: Method 105 of MIL-STD-202, test condition C.

Part number: M39030/5-(dash number from table I).

NOTES:

1. Revision letters are not used to denote changes due to the extensiveness of the changes.

2. Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	94117	292058P3	5985-00-450-3428
01	99899	370TNCM	
02	49956	978538	
02	52500	BW-251594-2	
03	04071	R365018-1	
03	18203	T130T	
03	06401	7910416	
03	05869	713116-1	
03	00929	TA-5MT	
04	19315	2132007-1	
04	99899	23556	
05	82577	926205-1C	
05	26805	3101-4001-02	
06	06424	1202001-2	
06	26805	3121-5003-10	
07	06424	1202001-1	
07	26805	3120-5007-10	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0927-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-D-39030/5A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.