|INCH-POUND|


MIL-D-39030/5B
1 March 1994
SUPERSEDING
MIL-D-39030/5A
22 December 1980

MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE IV (TNC), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the dummy loads described herein shall consist of this document and the latest issue of specification MIL-D-39030.

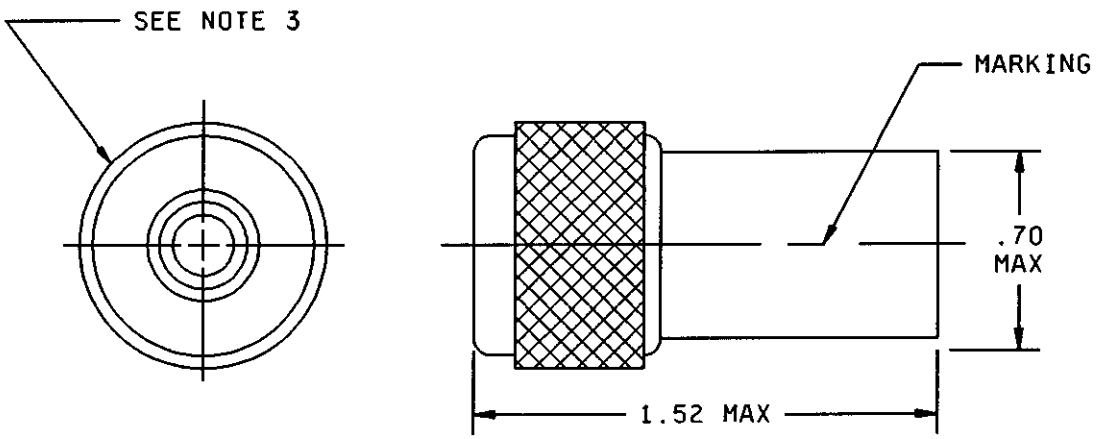


Inches	mm
.70	17.8
1.52	38.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 1. Dimensions and configuration, PINs M39030/5-01N and M39030/5-01S.

DISTRIBUTION STATEMENT A. Approved for public welfare; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

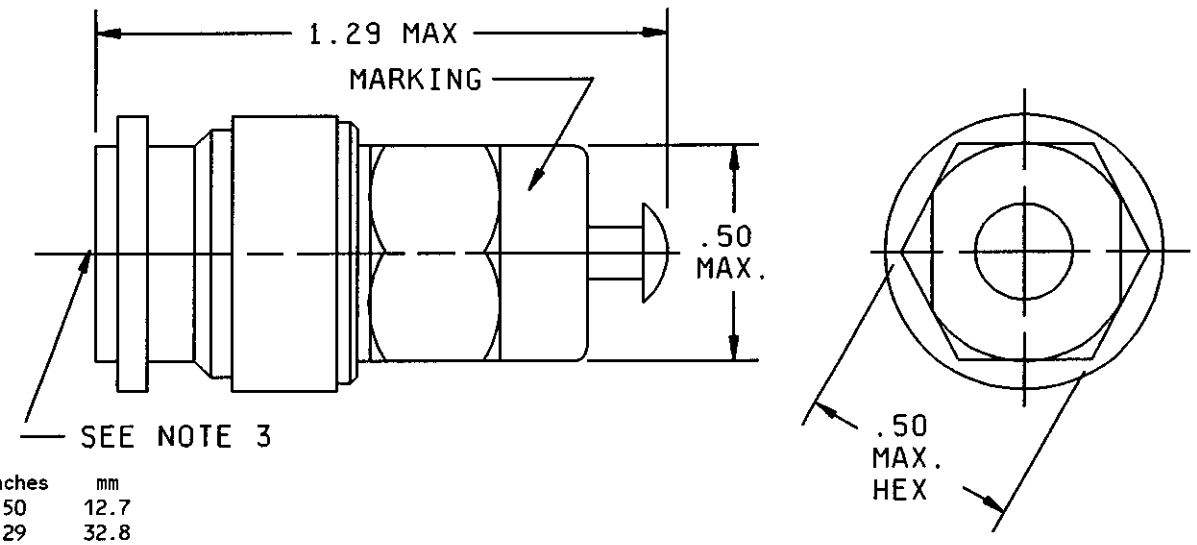

Inches	mm
.50	12.7
1.29	32.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 2. Dimensions and configuration, PINs M39030/5-02N and M39030/5-02S.

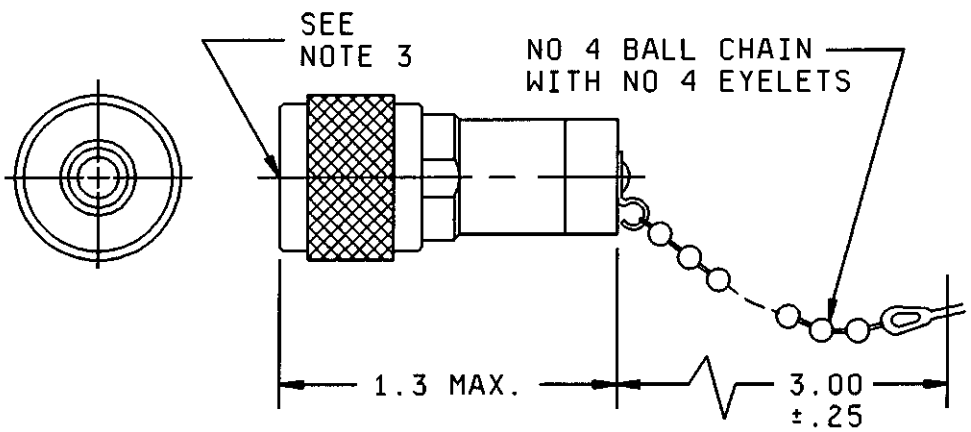


Inches	mm
.25	6.4
1.3	33.0
3.00	76.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 3. Dimensions and configuration, PINs M39030/5-03N and M39030/5-03S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

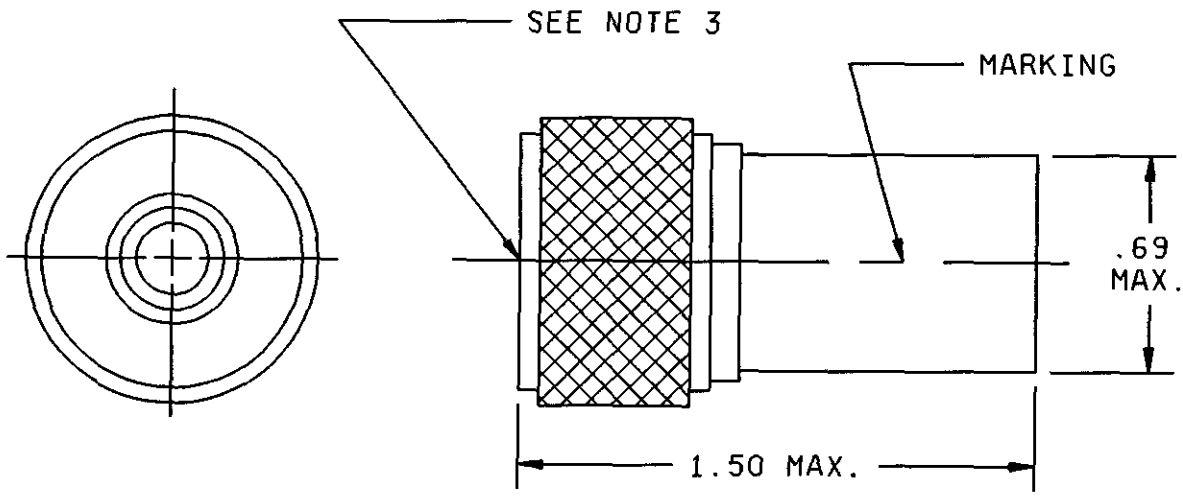


Inches	mm
.69	17.5
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 4. Dimensions and configuration, PINs M39030/5-04N and M39030/5-04S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

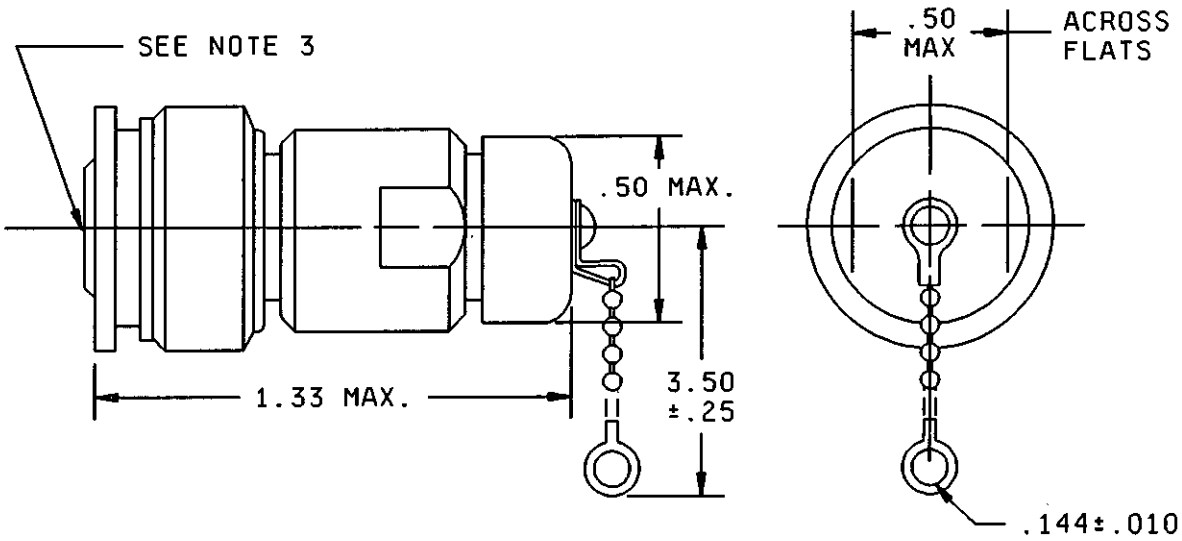


Inches	mm
.010	.25
.144	3.66
.25	6.35
.50	12.7
1.33	33.8
3.50	88.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 5. Dimensions and configuration, PINs M39030/5-05N and M39030/5-05S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

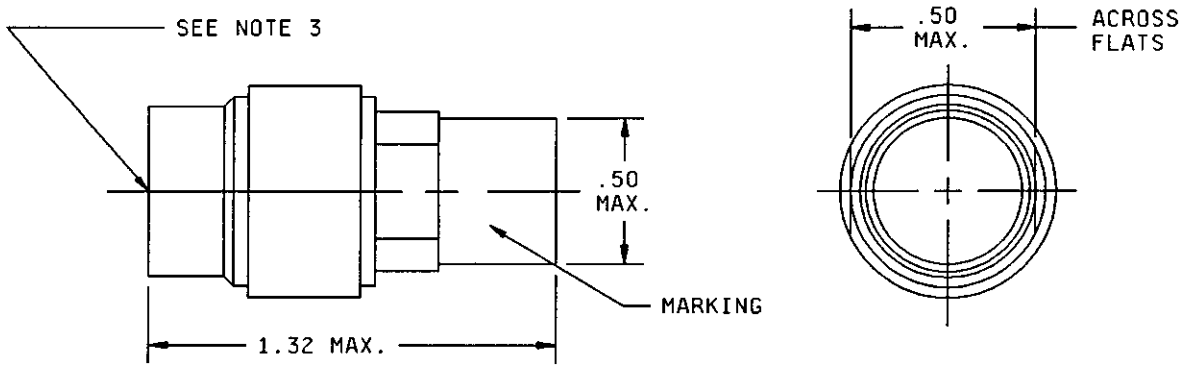

Inches	mm
.50	12.7
1.32	33.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 6. Dimensions and configuration, PINs M39030/5-06N and M39030/5-06S.

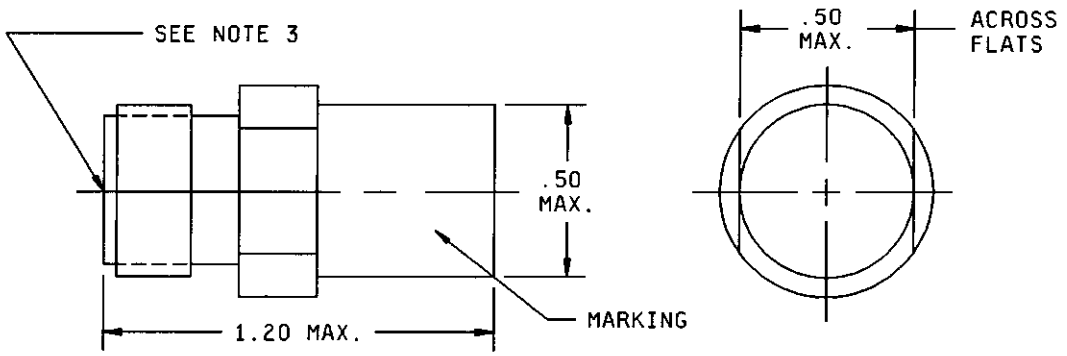

Inches	mm
.50	12.7
1.20	30.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Series TNC socket contact interface in accordance with MIL-STD-348.

FIGURE 7. Dimensions and configuration, PINs M39030/5-07N and M39030/5-07S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number N and S	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristics impedance	Weight (max)	Finish	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01 1/	DC to 10.0	1.40:1	5.0 2/	6.0K	50	3.0	Gold plated in accordance with MIL-G-45204, type II, class 2	1
02	.06 to .08	1.12:1	.5	.6K	75	1.3	"	2
03	DC to 10.0	1.15:1	2.0	2.5K	50	.4	"	3
04	DC to 10.0	1.05:1 (DC to 2.4 GHz) 1.20:1 (2.4 to 10.0 GHz)	5.0 2/	6.0K 2/	50	3.0	"	4
05	DC to 11.0	1.10:1	3.0	1K	51	.4	Passivated in accordance with QQ-P-35	5
06	.03 to 12.4	1.15:1	1.0	1.2K	50	.4	Nickel plated in accordance with QQ-N-290	6
07	.03 to 12.4	1.15:1	1.0	1.2K	50	.4	Nickel plated in accordance with QQ-N-290	7

1/ This dash number shall be used for a replacement part only. For new design, dash number 04 shall be used.
2/ Power input is derated linearly from 100 percent at 25°C to 25 percent at specified maximum ambient operating temperature.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 7.

Electrical characteristics: See table I.

Materials:

Body and connector: Corrosion-resistant steel in accordance with QQ-S-763.

Finish: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Contact pin and contact socket: Beryllium copper in accordance with ASTM-B-194, 196 or 197.

Finish: Gold plated in accordance with MIL-G-45204, type II, class 2.

Bead chain and lug: Corrosion-resistant steel or plastic.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01, 03, 06, and 07: -55°C to +125°C.
Dash number 02: -46°C to +71°C.
Dash number 04: -62°C to +71°C.
Dash number 05: -54°C to +125°C.

Nonoperating (storage):

Dash numbers 01, 03, 06, and 07: -65°C to +125°C.
Dash number 02: -57°C to +85°C.
Dash number 04: -62°C to +85°C.
Dash number 05: -54°C to +150°C.

Connector tests: The following tests shall be performed after visual and mechanical examination in qualification and group A inspections:

Threaded coupling torque: 2 inch-pounds, maximum.

Coupling tightening torque: 15 inch-pounds, minimum.

Barometric pressure: Method 105 of MIL-STD-202, test condition C.

Part or Identifying Number (PIN): M39030/5-(dash number from table I)N for unscreened.
M39030/5-(dash number from table I)S for screened.

Superseding part numbers: M39030/5-X of previous revisions are superseded by M39030/5-XN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Dash number	Manufacturer's CAGE code	Manufacturer's PIN
01N	94117	292058P3
01N	99899	370TNCM
02N	49956	978538
02N	74868	BW-251594-2
03N	04071	R365018-1
03N	18203	T130T
03N	06401	7910416
03N	05869	713116-1
03N	00529	TA-5MT
04N	55972	2132007-1
04N	99899	23556
05N	82577	926205-1C
05N	26805	3101-4001-02
06N	06424	1202001-2
06N	26805	3121-5003-10
07N	06424	1202001-1
07N	26805	3120-5007-10

1/ Dummy loads covered by this specification sheet are substitutable for the following manufacturers' PIN. This information in no way implies that the manufacturer's part is suitable as a substitute for the military PIN.

Note: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - AS, OS, SH
Air Force - 19
DLA - ES

Preparing activity:
DLA - ES

(Project 5985-1049)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.