INCH-POUND


MIL-DTL-39030/5C
w/AMENDMENT 2
19 November 2007
SUPERSEDING
MIL-DTL-39030/5C
w/AMENDMENT 1
13 June 2007

DETAIL SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE IV (TNC), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-39030.

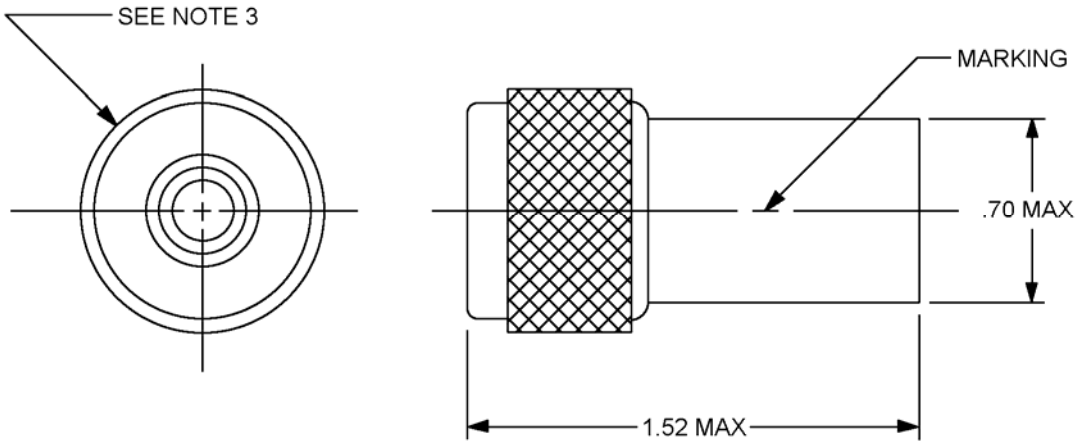


Inches	mm
.70	17.8
1.52	38.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.
4. Part or Identifying Number (PIN).

FIGURE 1. Dimensions and configuration, PINs M39030/5-01N and M39030/5-01S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

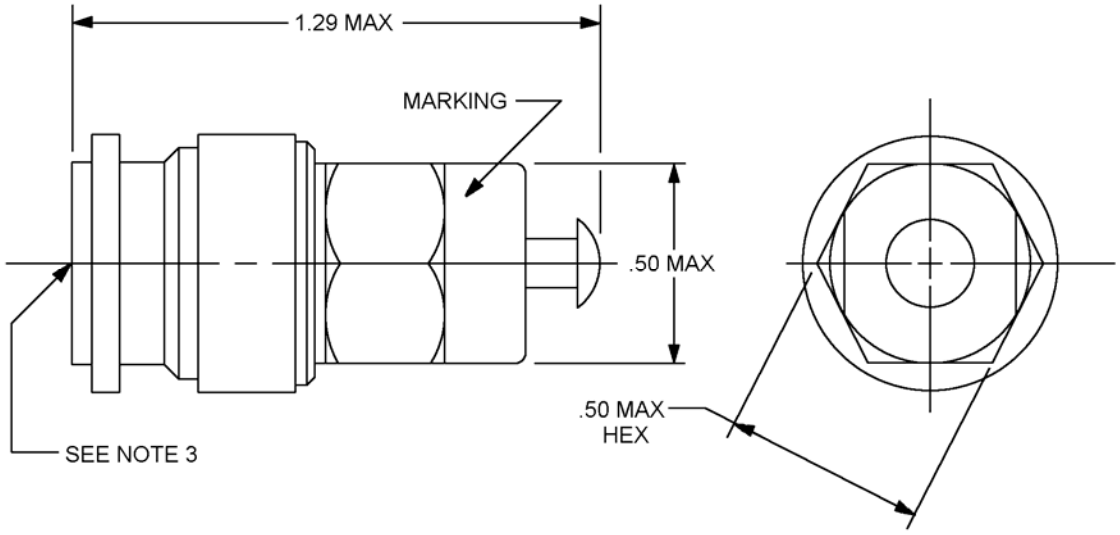

Inches	mm
.50	12.7
1.29	32.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 2. Dimensions and configuration, PINs M39030/5-02N and M39030/5-02S.

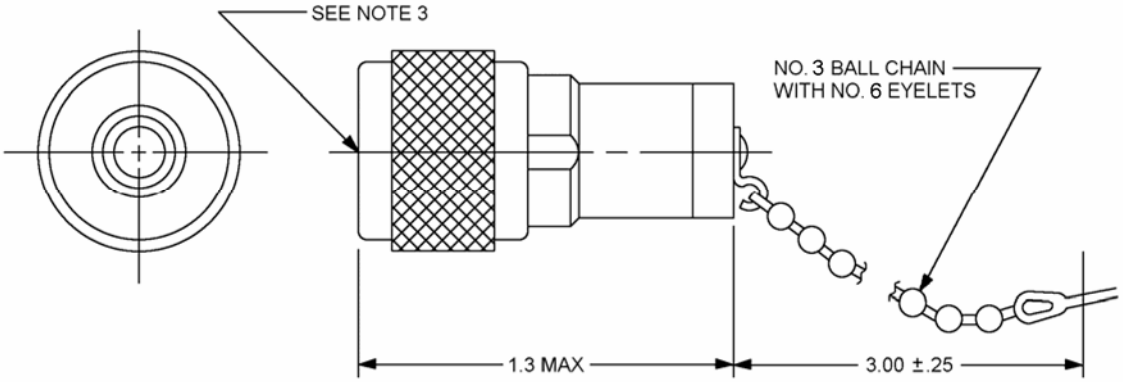


Inches	mm
.25	6.4
1.3	33.0
3.00	76.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 3. Dimensions and configuration, PINs M39030/5-03N and M39030/5-03S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

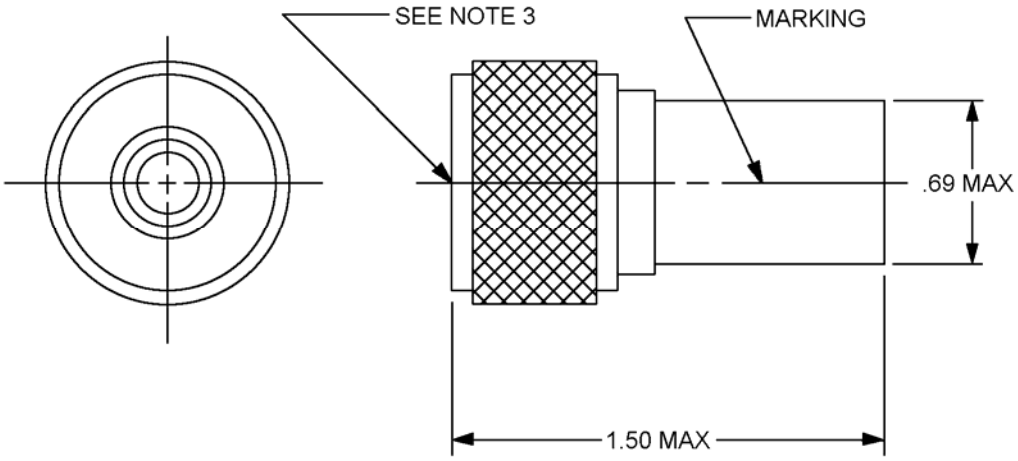


Inches	mm
.69	17.5
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 4. Dimensions and configuration, PINs M39030/5-04N and M39030/5-04S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

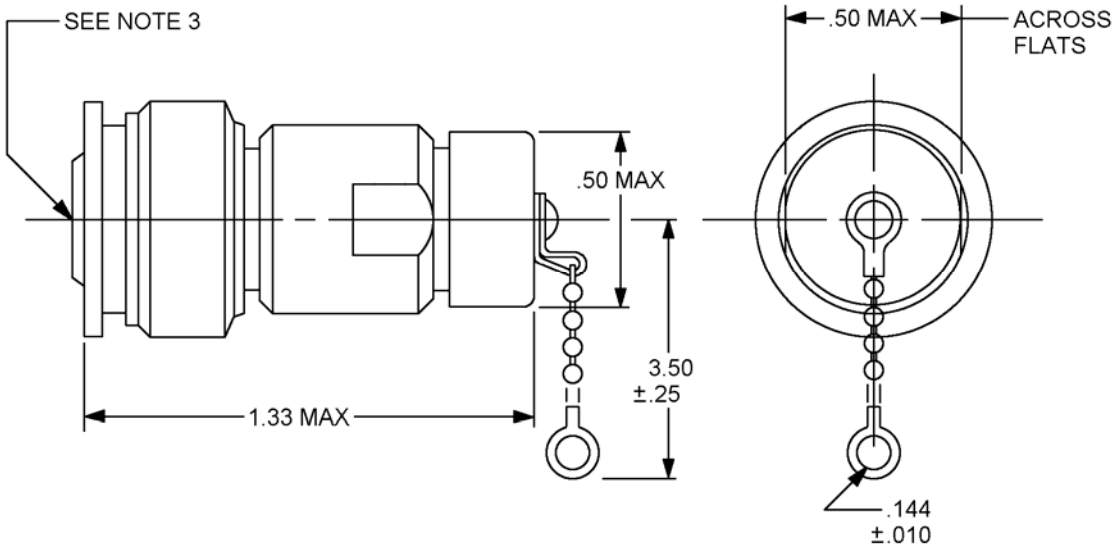


Inches	mm
.010	.25
.144	3.66
.25	6.35
.50	12.7
1.33	33.8
3.50	88.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGURE 5. Dimensions and configuration, PINs M39030/5-05N and M39030/5-05S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

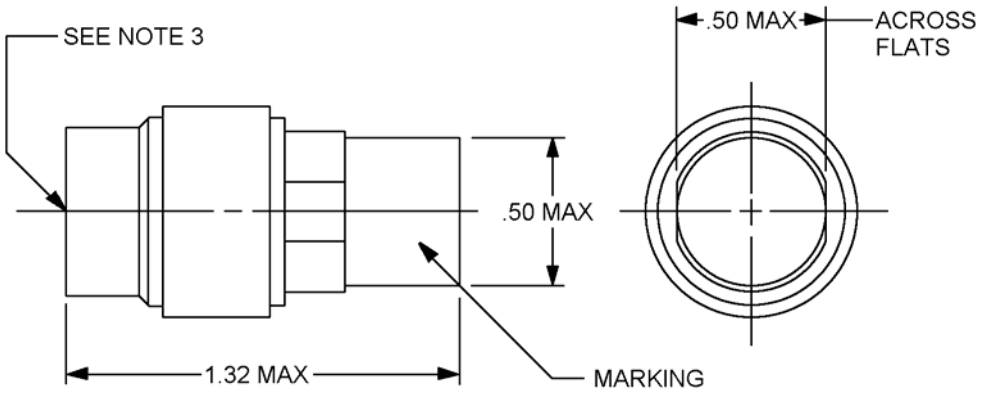

Inches	mm
.50	12.7
1.32	33.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC pin contact interface in accordance with MIL-STD-348.

FIGUER 6. Dimensions and configuration, PIN's M39030/5-06N and M39030/5-06S.

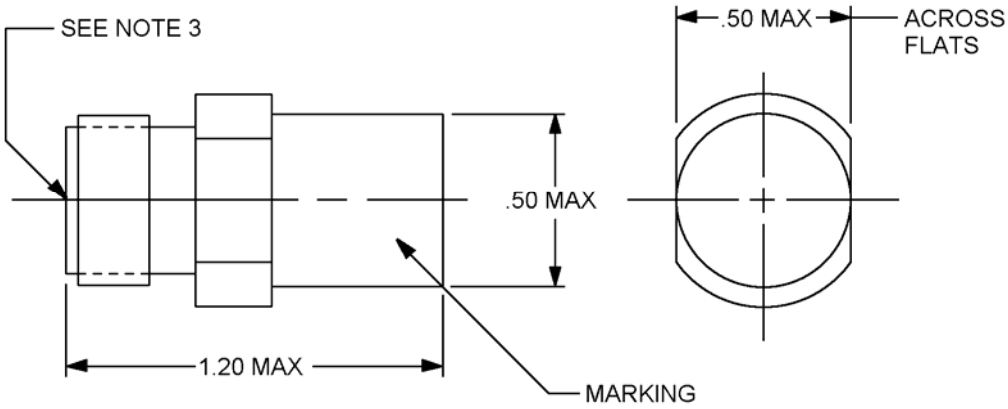

Inches	mm
.50	12.7
1.20	30.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Series TNC socket contact interface in accordance with MIL-STD-348.

FIGURE 7. Dimensions and configuration, PINs M39030/5-07N and M39030/5-07S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number N and S	Operating frequency (GHz)	VSWR (max)	Power handling capability (max)		Nominal characteristics Impedance (ohms)	Weight (max) (oz)	Finish	Figure number
			Average (watts)	Peak (watts)				
01 1/	DC to 10.0	1.40:1	5.0 2/	3.5K	50	3.0	Gold plated in accordance with ASTM B488, type 3, grade C, class 1.27	1
02	.06 to .08	1.12:1	.5	.6K	75	1.3	Gold plated in accordance with ASTM B488, type 3, grade C, class 1.27	2
03	DC to 10.0	1.15:1	2.0	2.5K	50	1.3	Gold plated in accordance with ASTM B488, type 3, grade C, class 1.27	3
04	DC to 10.0	1.05:1 (DC to 2.4 GHz) 1.20:1 (2.4 to10.0 GHz)	5.0 2/	3.5K	50	3.0	Gold plated in accordance with ASTM B488, type 3, grade C, class 1.27	4
05	DC to 11.0	1.10:1	3.0	1K	51	1.3	Passivated in accordance with ASTM-A967 or SAE-AMS2700	5
06	.03 to 12.4	1.15:1	1.0	1.2K	50	1.3	Nickel plated in accordance with SAE-AMS-QQ-N-290	6
07	.03 to 12.4	1.15:1	1.0	1.2K	50	1.3	Nickel plated in accordance with SAE-AMS-QQ-N-290	7

1/ This dash number shall be used for a replacement part only. For new design, dash number 04 shall be used.
2/ Power input is derated linearly from 100 percent at 25°C to 25 percent at specified maximum ambient operating temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimension and configurations: See figures 1 thru 7.

Electrical characteristics: See table I.

Materials:

Body and connector: Corrosion-resistant steel in accordance with SAE-AMS-QQ-S-763 or ASTM A484/A484M and ASTM A582/A582M.

Finish: See table I.

Contact pin and contact socket: Beryllium copper in accordance with ASTM B194, ASTM B196/A196M or ASTM B197/B197M.

Finish: The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27μm) of gold in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the inner diameter (I.D.), measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the I.D. shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Bead chain and lug: Corrosion-resistant steel or plastic.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01, 03, 04, 06, and 07: -55°C to +125°C.
Dash number 02: -46°C to +71°C.
Dash number 05: -54°C to +125°C.

Nonoperating (storage):

Dash numbers 01, 03, 04, 06, and 07: -65°C to +125°C.
Dash number 02: -57°C to +85°C.
Dash number 05: -54°C to +150°C.

Connector tests: The following tests shall be performed after visual and mechanical examination in qualification and group A inspections:

Threaded coupling torque: 2 inch-pounds, maximum.

Coupling tightening torque: 15 inch-pounds, minimum.

Barometric pressure: Method 105 of MIL-STD-202, test condition C.

PIN: M39030/5-(dash number from table I) N for unscreened.
M39030/5-(dash number from table I) S for screened.

Superseding PINs: M39030/5-X of previous revisions is superseded by M39030/5-XN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-39030, this document references the following:

MIL-STD-202
MIL-STD-348
ASTM B194
ASTM B196/B196M
ASTM B197/B197M
ASTM A484/A484M
ASTM B488
ASTM A582/A582M
ASTM-A967
SAE-AMS-QQ-N-290
SAE-AMS-QQ-S-763
SAE-AMS2700

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2007-023)

Review activities:
Army - AV, MI
Navy - AS, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.