
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE V (N), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

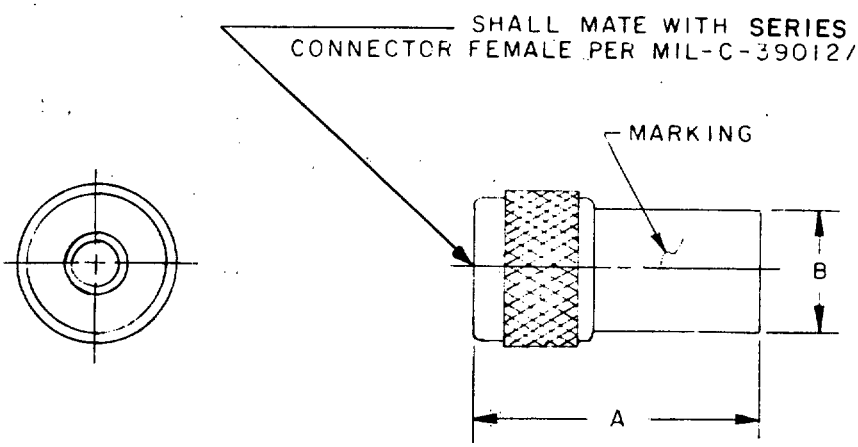

Dash number	A Max	B Max
01	1.64	.76
02	1.90	.76
06	1.28	.81


INCHES	MM
.76	19.3
.81	20.6
1.28	32.5
1.64	41.7
1.90	48.3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, part numbers M39030/6-01, -02, and -06.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:51Z
Check the source to verify that this is the current version before use.

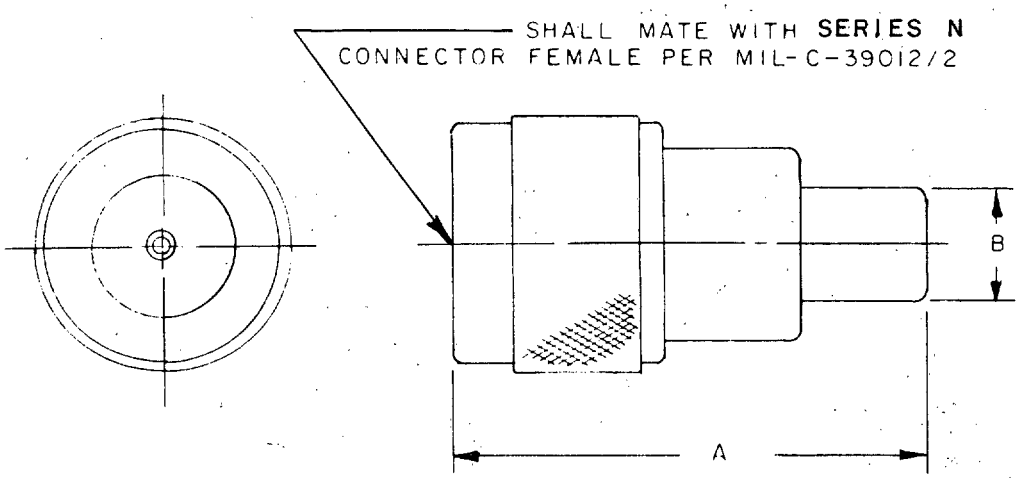


Dash number	A Max	B Max
03	1.51	.38
05	1.64	.70

INCHES	MM
.38	9.7
.70	17.8
1.51	38.4
1.64	41.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, part numbers M39030/6-03 and -05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

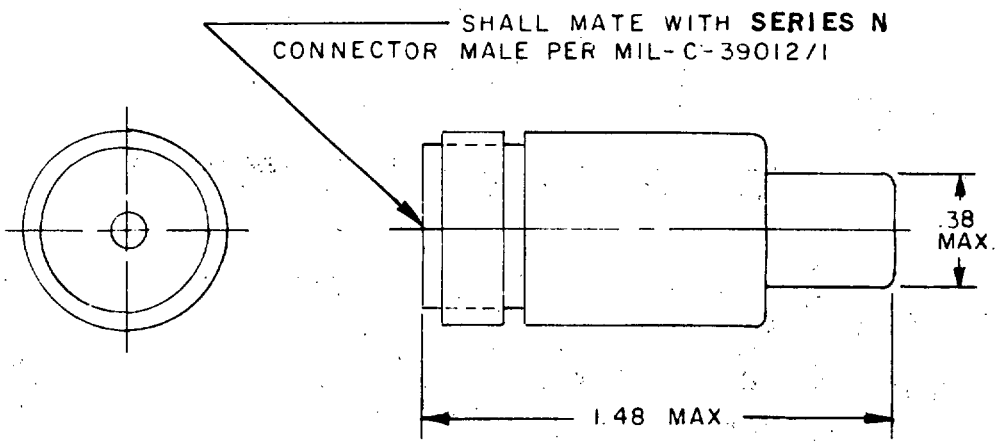


INCHES	MM
.38	9.7
1.48	37.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, part number M39030/6-04.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:51Z
Check the source to verify that this is the current version before use.

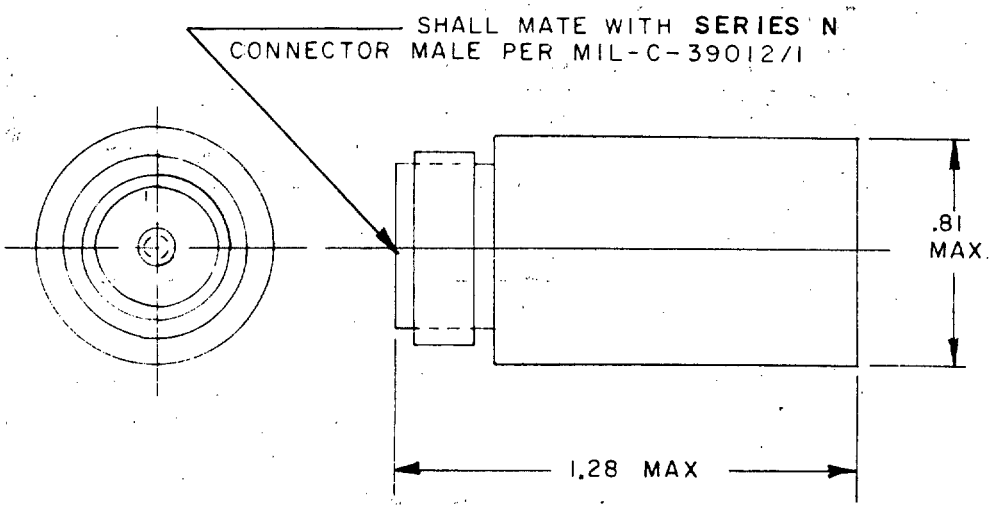

INCHES	MM
.81	20.6
1.28	32.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 4. Dimensions and configuration, part number M39030/6-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance	Weight (max)	Finish	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01 1/	DC to 12.4	1.05:1 (DC to 4.0 GHz) 1.20:1 (4.0 to 12.4 GHz)	5 2/	2K 2/	50	3	Gold plated per MIL-G-45204, type II, class 2	1
02 3/	DC to 12.4	1.35:1	1 2/	1.0K 2/			Gold plated per MIL-G-45204, type II, class 2	1
03	.03 to 12.4	1.10:1	1 2/	0.5K 2/			Nickel plated per QQ-N-290	2
04	.03 to 12.4	1.10:1	1 2/	0.5K 2/			Nickel plated per QQ-N-290	3
05	DC to 12.4	1.15:1	5 2/	2.0K 2/		5	Anodized per MIL-A-8625	2
06	DC to 18.0	(1.025 +.004f):1 4/	2	1.0K		3	Passivated per QQ-P-35	1
07	DC to 18.0	(1.025 +.004f):1 4/	2	1.0K		3	Passivated per QQ-P-35	4

1/ Use for replacement part only, for new design use dash number 05.
2/ Power input is derated linearly from 100 percent at +25°C to 10 percent at specified maximum ambient operating temperature.
3/ Use for replacement part only, for new design use dash number 06.
4/ Where f is the frequency in GHz.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 4.

Electrical characteristics: See table I.

Materials:

Body: Corrosion-resistant steel per QQ-S-763 (dash numbers 01 thru 04, 06, and 07) or aluminum alloy per QQ-A-225 (dash number 05).

Finish: See table I.

Connector: Corrosion-resistant steel per QQ-S-763.

Finish: See table I.

Contact pin and contact socket: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01 thru 04, 06, and 07 - -55°C to +125°C.
Dash number 05 - -55°C to +105°C.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:51Z
Check the source to verify that this is the current version before use.

Nonoperating (storage):

Dash numbers 01 thru 04, 06, and 07 - -65°C to +125°C.
Dash number 05 - -65°C to +125°C.

Barometric pressure: Method 105 of MIL-STD-202, test condition C.

Part number: M39030/6-(dash number from table I).

NOTES:

1. Revision letters are not used to denote changes due to the extensiveness of the changes.

2. Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	49956	582396	
01	94117	292058P2	
01	94117	1292034P1	5985-00-893-1773
01	99899	370BNM	5985-00-893-1773
01	05869	723398-6	5985-00-893-1773
02	93459	889-114	5985-00-754-8813
02	80058	CN1127/U	5985-00-754-8813
02	00929	TAC 64	5985-00-754-8813
02	90073	192-411	5985-00-754-8813
02	93459	535MN	5985-00-754-8813
02	05869	712288-8	5985-00-754-8813
02	24446	7437553P1	5985-00-754-8813
03	06424	1202003-2	
03	26805	3021-5003-10	
04	06424	1202003-1	
04	26805	3020-5010-10	
05	82577	927060-10	
05	99899	23707	
05	80063	SM-C-920979-2	
05	18203	T130N	
05	10001	2938945-1	
05	00929	TA-E49	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
06	12436	6010861-001	
06	34078	2001M	5985-01-029-6568
06	05869	712299-737	
07	12436	6010861-002	
07	34078	2001F	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0927-3)

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:51Z
Check the source to verify that this is the current version before use.