INCH-POUND


MIL-DTL-39030/6B
w/AMENDMENT 1
26 October 2011
SUPERSEDING
MIL-DTL-39030/6B
14 April 2003

DETAIL SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE V (N), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-39030.

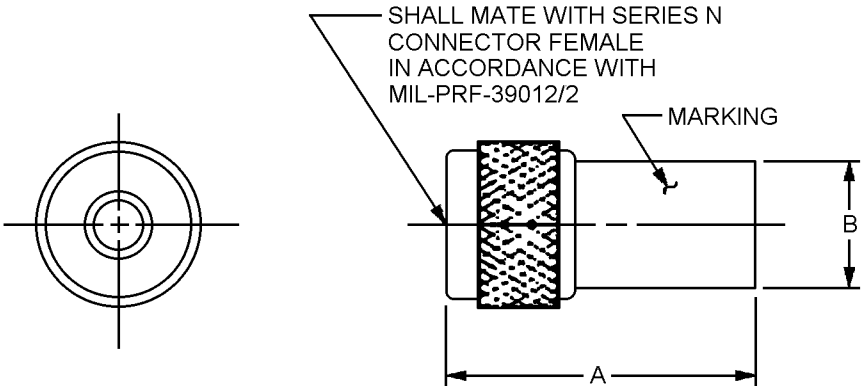


Dash number	A max	B max
01	1.64 (41.7)	.76 (19.3)
02	1.90 (48.3)	.76 (19.3)
06	1.60 (40.6)	.81 (20.6)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Part or Identifying Number (PIN).

FIGURE 1. Dimensions and configuration, PINs M39030/6-01, -02 and -06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

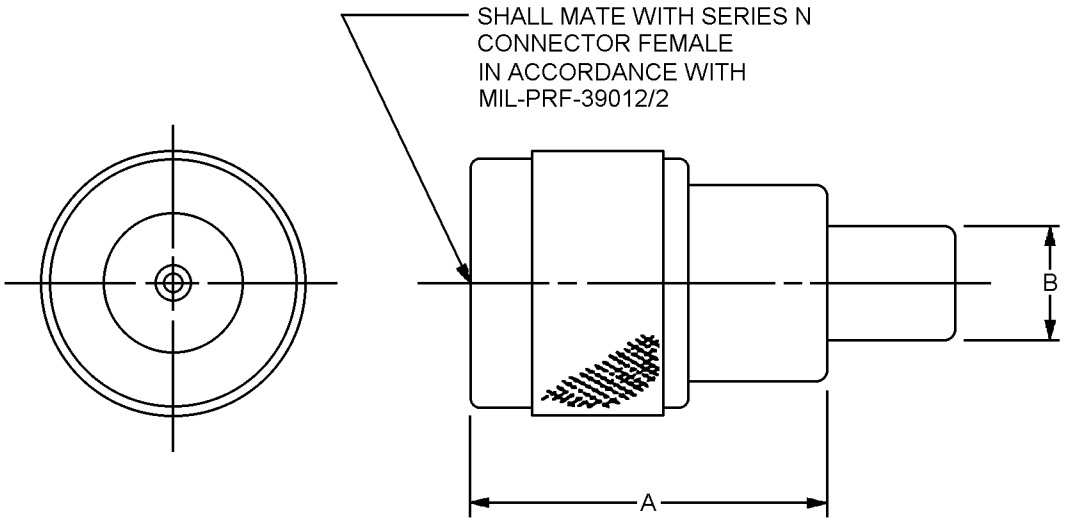


Dash number	A max	B max
03	1.51 (38.4)	.38 (9.7)
05	1.64 (41.7)	.70 (17.8)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configuration, PINs M39030/6-03, and -05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

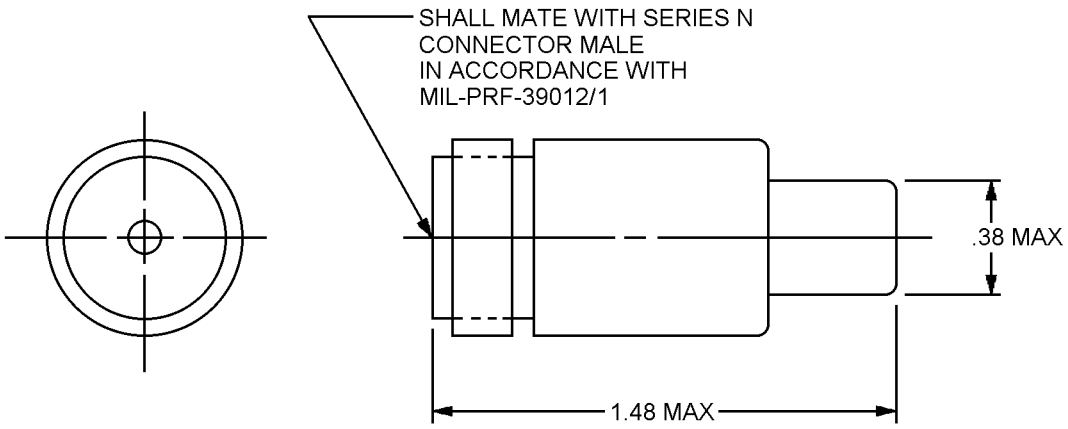


Inches	mm
.38	9.7
1.48	37.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 3. Dimensions and configuration, PIN M39030/6-04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

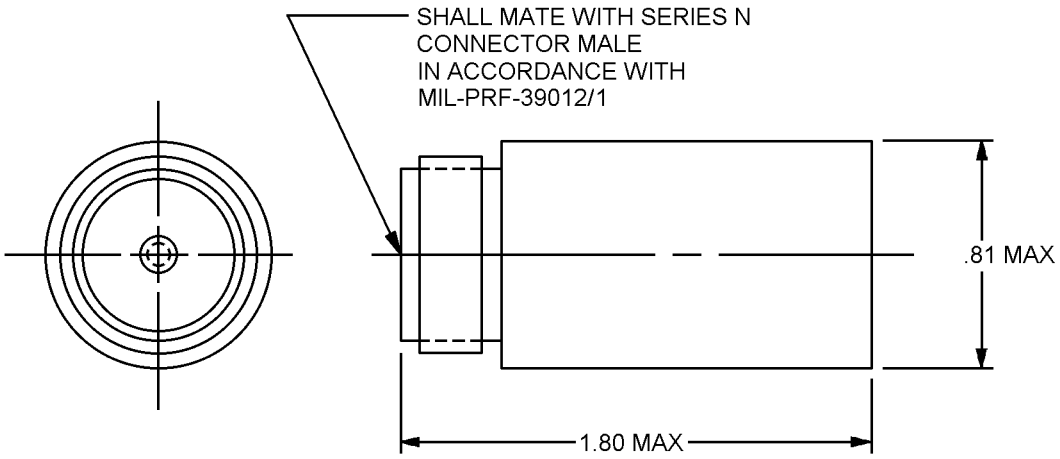

Inches	mm
.81	20.6
1.80	45.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Dimensions and configuration, PIN M39030/7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency (GHz)	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance (ohms)	Weight (max) (oz)	Finish	Figure number
			Average (watts)	Peak (watts)				
01 1/	DC to 12.4	1.05:1 (DC to 4.0 GHz) 1.20:1 (4.0 to 12.4 GHz)	5 2/	2K 2/	50	3	Gold plated in accordance with ASTM B488, type 3 Class 1.27	1
02 3/	DC to 12.4	1.35:1	1 2/	1.0K 2/	50	3	Gold plated in accordance with ASTM B488, type 3 Class 1.27	1
03	.03 to 12.4	1.10:1	1 2/	0.5K 2/	50	3	Nickel plated in accordance with SAE AMS-QQ-N-290	2
04	.03 to 12.4	1.10:1	1 2/	0.5K 2/	50	3	Nickel plated in accordance with SAE AMS-QQ-N-290	3
05	DC to 12.4	1.15:1	5 2/	2.0K 2/	50	5	Anodized in accordance with MIL-A-8625	2
06	DC to 18.0	(1.05 +.007f):1 4/	2 2/	1.0K 2/	50	3	Passivated in accordance with ASTM A967 or SAE AMS-2700	1
07	DC to 18.0	(1.025 +.004f):1 4/	2 2/	1.0K 2/	50	3	Passivated in accordance with ASTM A967 or SAE AMS-2700	4

1/ Use for replacement part only, for new design use dash number 05.
2/ Power input is derated linearly from 100 percent at +25°C to 10 percent at specified maximum ambient operating temperature.
3/ Use for replacement part only, for new design use dash number 06.
4/ "f" is the frequency in GHz.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 4.

Electrical characteristics: See table I.

Materials:

Body: Corrosion-resistant steel in accordance with SAE AMS-QQ-S-763, stainless steel type 303 in accordance with ASTM A582/A582M (dash number 01 thru 04, 06 and 07) or aluminum alloy in accordance with SAE AMS-QQ-A-225.

Finish: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

Connector: Corrosion-resistant steel in accordance with SAE AMS-QQ-S-763.

Finish: See table I.

Contact pin and contact socket: Beryllium copper in accordance with ASTM B196/B196M, ASTM B197/B197M and ASTM B194.

Finish: The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27μm) of gold in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE AMS-QQ-N-290, class 1, including the ID, measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the ID shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01 thru 04, 06 and 07: -55°C to +125°C.
Dash numbers 05: -55°C to +105°C.

Non-operating (storage): -65°C to +165°C.

Dash numbers 01 thru 04, 06 and 07: -65°C to +125°C.
Dash numbers 05: -65°C to +125°C.

Barometric pressure: Method 105 of MIL-STD-202, test condition C.

PIN: M39030/6-(dash number from table I).

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-39030, this document references the following;

ASTM A582/A582M
ASTM A967
ASTM B194
ASTM B196/B196M
ASTM B197/B197M
ASTM B488
MIL-A-8625
MIL-PRF-39012/1
MIL-PRF-39012/2
MIL-STD-202
SAE AMS-2700
SAE AMS-QQ-A-225
SAE AMS-QQ-N-290
SAE AMS-QQ-S-763

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985 - 2011 - 030)

Review activities:
Army - AV, MI
Navy - AS, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:50Z
Check the source to verify that this is the current version before use.