
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE III (BNC), LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

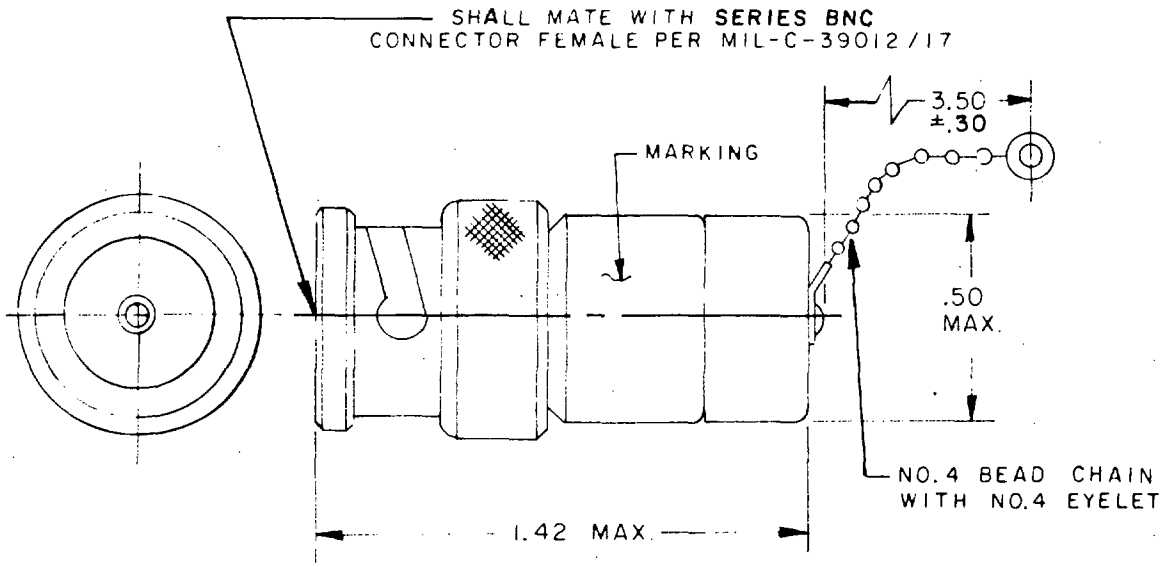


INCHES	MM
.30	7.6
.50	12.7
1.42	36.1
3.50	88.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, part numbers M39030/7-01, -02, -03, and -04.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

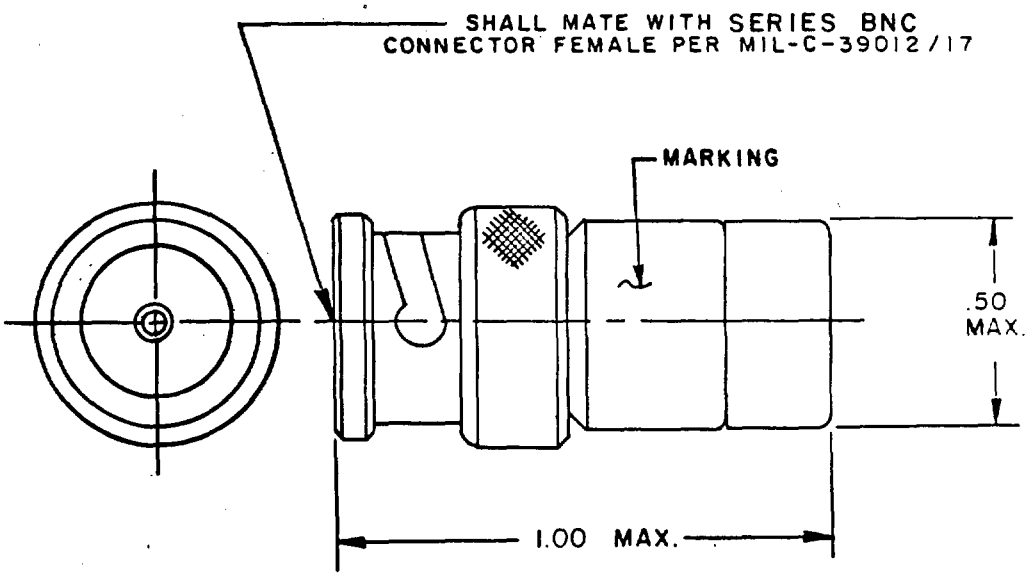


INCHES	MM
.50	12.7
1.00	25.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, part number M39030/7-05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

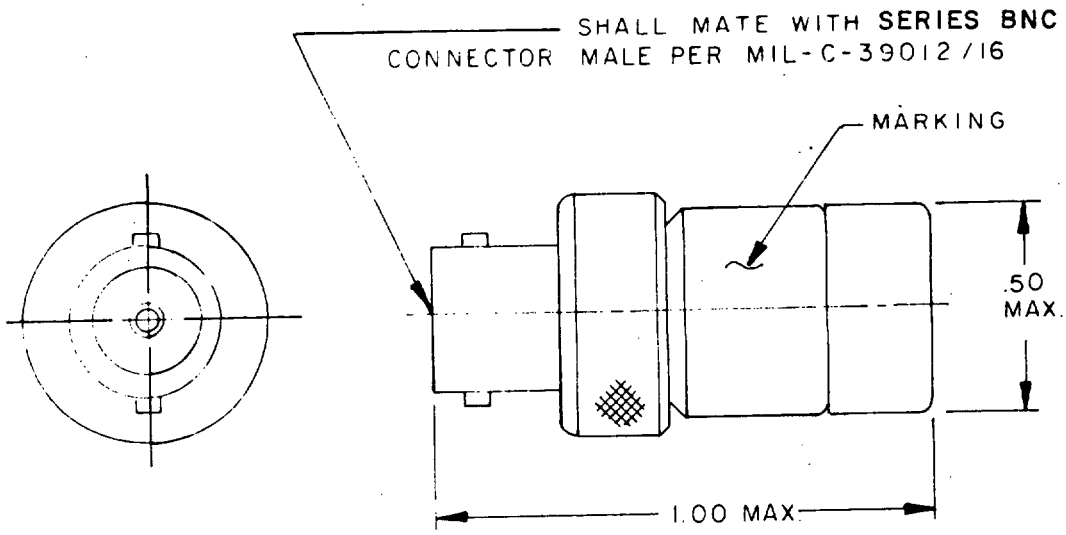

INCHES	MM
.50	12.7
1.00	25.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration, part number M39030/7-06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance	Weight (max)	Finish of body and connector	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01	DC to .25	1.10:1	.5	1.0K	75	1.1	Gold plated per MIL-G-45204, type II, class 2	1
02	DC to .25	1.10:1	.5	1.0K	93	1.1	↓	1
03	DC to .25	1.10:1	.5	1.0K	100	1.1	↓	1
04	DC to .25	1.10:1	.5	1.0K	600	1.1	↓	1
05	DC to 2.5	1.15:1	2.0 1/	1.0K 1/	50	1.0	Nickel plated per QQ-N-290	2
06	DC to 2.5	1.15:1	2.0 1/	1.0K 1/	50	1.0	Nickel plated per QQ-N-290	3

1/ Power input is derated linearly from 100 percent at +25°C to 50 percent at +85°C and from 50 percent at +85°C to 25 percent at +125°C.

REQUIREMENTS:

Dimensions and configurations: See figures 1 thru 3.

Electrical characteristics: See table I.

Materials:

Body and connector: Corrosion-resistant steel per QQ-S-763 (dash numbers 01 thru 04) or brass per QQ-B-626 (dash numbers 05 and 06).

Finish: See table I.

Contact pin and contact socket: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Bead chain and lug: Corrosion-resistant steel or plastic.

Weight: See table I.

Ambient temperature range:

Operating:

Dash numbers 01 thru 04 - -25°C to +105°C.
Dash numbers 05 and 06 - -55°C to +125°C.

Nonoperating (storage):

Dash numbers 01 thru 04 - -25°C. to +105°C.
Dash numbers 05 and 06 - -55°C to +125°C.

Part number: M39030/7-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	76301	ST5M1609-002	
01	05276	3840-2	
02	76301	ST5M1609-003	
02	05276	3840-3	
03	76301	ST5M1609-004	
03	05276	3840-4	
04	76301	ST5M1609-005	
04	05276	3840-5	
05	12436	6010862-001	
05	34078	2048M	
05	76301	ST5M1609-001	
05	05276	3840-1	
05	80063	SM-A-588119	
05	94375	5-B079H-51	
06	12436	6010862-002	
06	34078	2048F	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0925-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-D- 39030/7

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:51Z
Check the source to verify that this is the current version before use.