
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL, TYPE V (N), MEDIUM POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

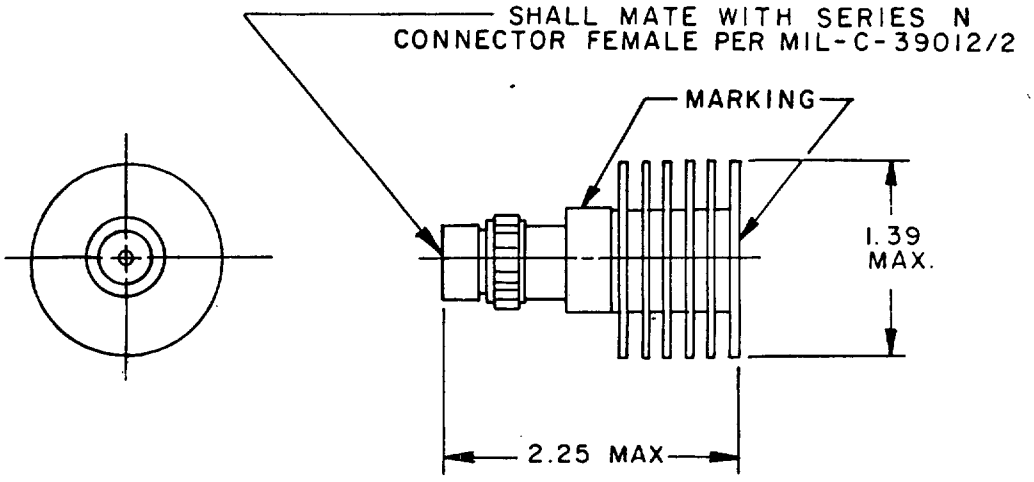


INCHES	MM
1.39	35.3
2.25	57.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration, part number M39030/10-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

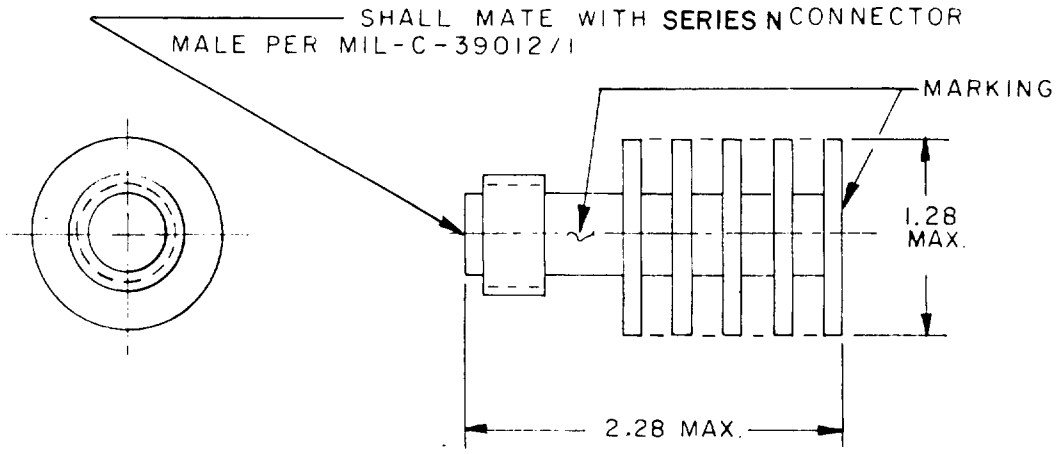

INCHES	MM
1.28	32.5
2.28	57.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration, part number M39030/10-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Dash number	Operating frequency	VSWR (max)	Power handling capability (max)		Nominal characteristic impedance	Weight (max)	Finish	Figure number
			Average	Peak				
	GHz		Watts	Watts	Ohms	Oz		
01	DC to 6.0	1.20:1 (DC to 4.0 GHz) 1.30:1 (4.0 to 6.0 GHz)	10	5K	50	2.1	Body 2/ Connector 3/	1
02	DC to 18.0	1.10:1 (DC to 8.0 GHz) 1.20:1 (8.0 to 12.4 GHz) 1.30:1 (12.4 to 18.0 GHz)	20 1/	5K 1/	50	10.0	Body 2/ Connector 4/	2

1/ Input power is derated linearly from 100 percent at +45°C to 10 percent at +125°C.
2/ Black anodized per MIL-A-8625.
3/ Gold plated per MIL-G-45204, type II, class 2.
4/ Passivated per QQ-P-35.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Electrical characteristics: See table I.

Materials:

Body: Aluminum alloy per QQ-A-225.

Finish: See table I.

Connector: Corrosion-resistant steel per QQ-S-763.

Finish: See table I.

Contact pin and contact socket: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: See table I.

Ambient temperature range:

Operating:

Dash number 01 - -55°C to +125°C.
Dash number 02 - -55°C to +105°C.

Nonoperating (storage):

Dash number 01 - -55°C to +125°C.
Dash number 02 - -65°C to +125°C.

Part number: M39030/10-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	37695	189309-2	
01	00929	TB-5MN	
01	18203	T250N	
01	95750	17009900	
01	12598	T-2006	
01	33911	T-50-10	
02	12436	6010545-001	
02	99899	374BNF	
02	82577	927060-2D	5985-01-012-8095
02	99899	23708	5985-01-012-8095
02	03538	7844081	
02	00929	TB-6MN	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0925-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:52Z
Check the source to verify that this is the current version before use.