
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, TYPE XIV (BIFURCATED CONTACT), STRIPLINE, HIGH POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the dummy loads described herein shall consist of this specification and the latest issue of MIL-D-39030.

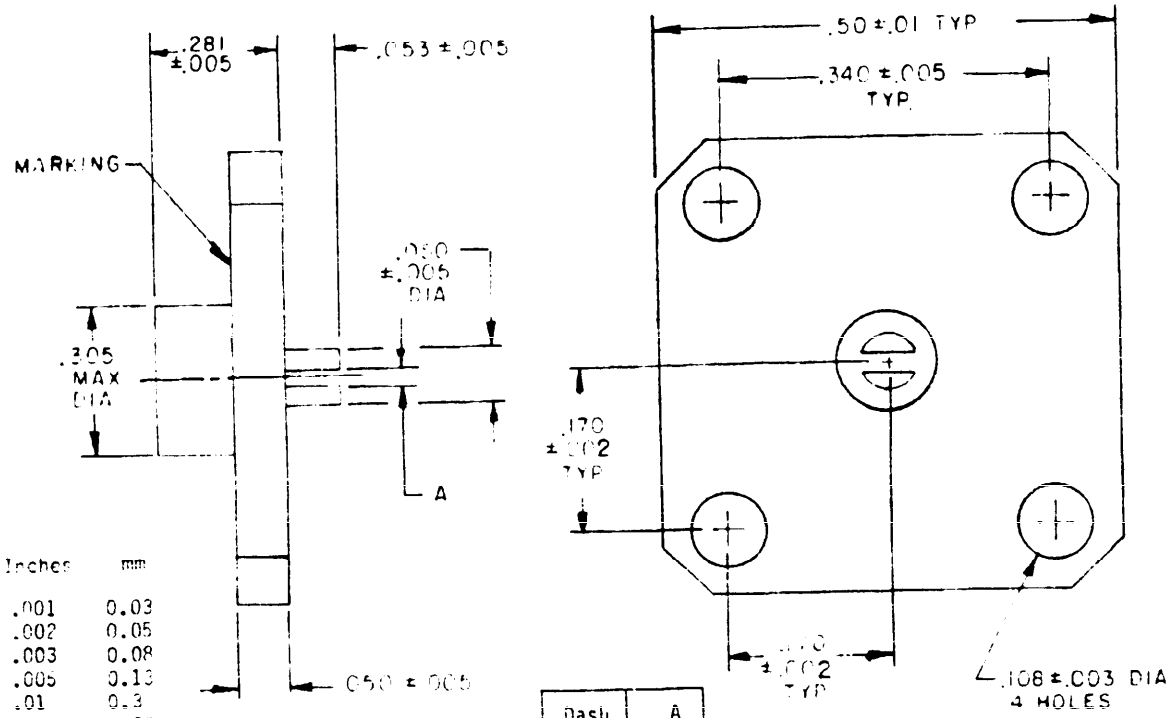

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.005	0.13
.01	0.3
.013	0.33
.023	0.58
.028	0.71
.050	1.27
.053	1.35
.108	2.74
.170	4.32
.281	7.14
.305	7.75
.340	8.64
.50	12.7

Dash number	A
01 04	.028 ±.002
02 05	.013 ±.002
03 06	.023 ±.002

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

(A) denotes changes

FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Electrical characteristics:

Operating frequency: DC to 12.0 GHz.

Voltage standing wave ratio (VSWR):

1.15:1, maximum (DC to 4.0 GHz).

1.35:1, maximum (4.0 to 8.0 GHz).

1.50:1, maximum (8.0 to 12.0 GHz).

Power:

(A) Average: 20 watts, maximum. Average power rating is derated to 25 percent when maximum peak power is applied simultaneously.

Peak: Peak power input is specified at 500 watts maximum at 10 microseconds pulse with .1 percent duty cycle. Average power during peak power application shall not exceed maximum average power.

NOTE: Power input is specified at a heat sink temperature of +60°C.

Nominal characteristic impedance: 50 ohms.

Materials:

(A) Body: Aluminum alloy per QQ-A-225 for dash numbers 01, 02, and 03.
Brass per QQ-B-626 for dash numbers 04, 05, and 06.

(A) Finish: Chemical conversion coating per MIL-C-5541, class 1A for dash numbers 01, 02, and 03.
Nickel per QQ-N-290, class 1 for dash numbers 04, 05, and 06.

Bifurcated contact pin: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: .25 ounce, maximum.

Ambient temperature range:

Operating: -55°C to +125°C.

Nonoperating (storage): -65°C to +125°C.

Solderability: Method 208 of MIL-STD-202; the following details and exception shall apply:

a. Number of terminations of each part to be tested: One contact.

b. Special preparation of terminations: No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.

c. Depth of immersion: The entire surface of the contact shall be covered.

d. Method of mounting: The dummy load shall be mounted onto a heat sink.

e. Examination of terminations: There shall be no evidence of pinholes and blistering.

NOTE: This test shall be performed after the visual and mechanical inspection in qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:53Z
Check the source to verify that this is the current version before use.

Part number: M39030/15-(dash number from figure 1).

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	NSN
01	31395	112578-3	
01	24602	8481	
02	31395	112578-6	
02	24602	8482	
03	31395	112578-9	
03	24602	8483	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AV
Navy - OS, SH
Air Force - 17, 85
DLA - ES

User activities:
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0996-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:53Z
Check the source to verify that this is the current version before use.