
MILITARY SPECIFICATION SHEET

DUMMY LOAD, ELECTRICAL, TYPE XIV (TAB CENTER CONTACT), STRIPLINE, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the dummy load described herein shall consist of this specification and the latest issue of MIL-D-39030.

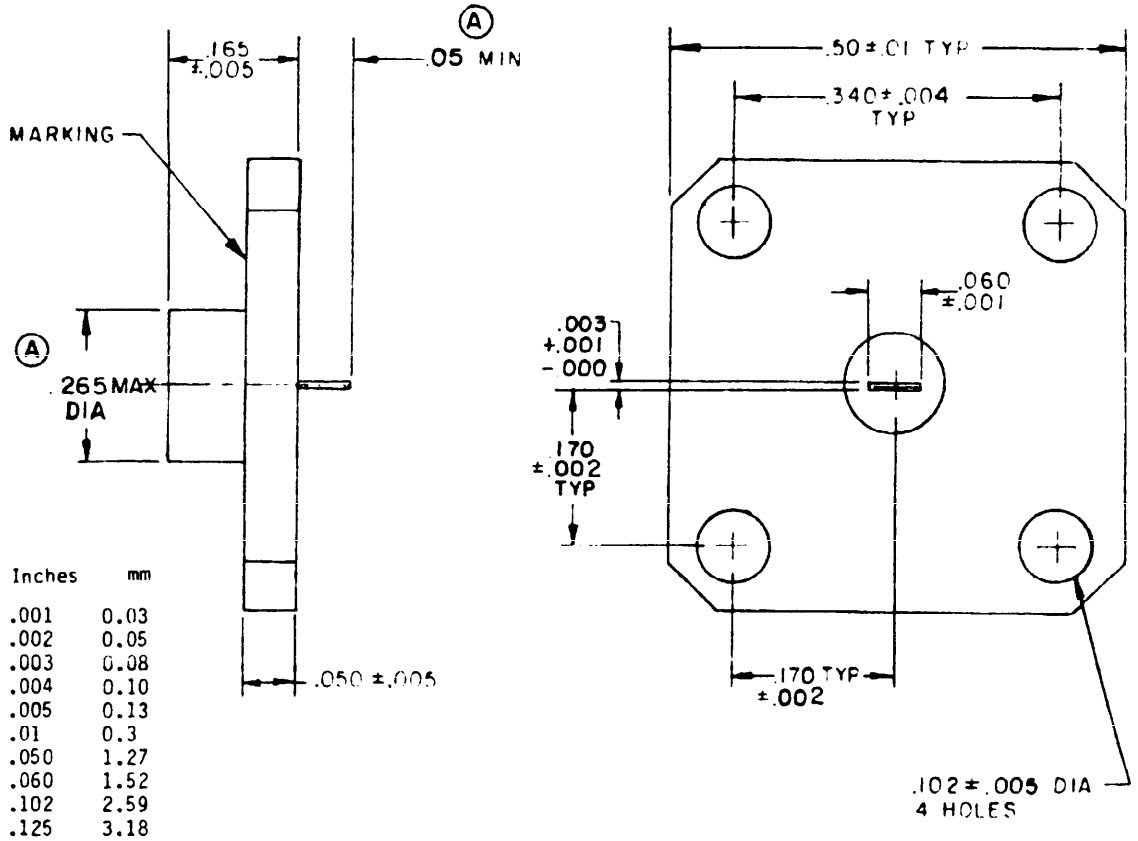

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.01	0.3
.050	1.27
.060	1.52
.102	2.59
.125	3.18
.165	4.19
.170	4.32
.20	5.1
.340	8.64
.50	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

FSC 5985

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Electrical characteristics:

Operating frequency: DC to 12.4 GHz.

Voltage standing wave ratio (VSWR):

1.10:1, maximum (DC to 4.0 GHz).

1.20:1, maximum (4.0 to 8.0 GHz).

1.30:1, maximum (8.0 to 12.4 GHz).

Power:

Average: 1 watt, maximum.

(A) Peak: 1 kilowatt, maximum with duty cycle of 0.1 percent.

NOTE: Power input is derated linearly from 100 percent at +25°C to 10 percent at +125°C.

Nominal characteristic impedance: 50 ohms.

Materials:

Body: Brass per QQ-B-626.

(A) Finish: Gold plated per MIL-G-45204, type II, class 2 for dash number 01. Nickel plated per QQ-N-290, class 1 for dash number 02.

Tab contact: Beryllium copper per QQ-C-530.

(A) Finish: Gold plated per MIL-G-45204, type II, class 2 for dash number 01. Nickel plated per QQ-N-290, class 1 for dash number 02.

Weight: .07 ounce, maximum.

Ambient temperature range:

Operating: -55°C to +125°C.

Nonoperating (storage): -65°C to +125°C.

Solderability: Method 208 of MIL-STD-202; the following details and exception shall apply:

a. Number of terminations of each part to be tested: One contact.

b. Special preparation of terminations: No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.

c. Depth of immersion: The entire surface of the contact shall be covered.

d. Method of mounting: The dummy load shall be mounted onto a heat sink.

e. Examination of terminations: There shall be no evidence of pinholes and blistering.

NOTE: This test shall be performed after the visual and mechanical inspection in qualification.

Part number: M39030/17-01.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:54Z
Check the source to verify that this is the currenversion before use.

NOTE: The dummy load covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	NSN
01	28528	A1133693	
	03888	PFT-500-3	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AV
Navy - OS, SH
Air Force - 17, 85
DLA - ES

User activities:
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

Project 5985-0996-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.