
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, TYPE XIV (PIN CONTACT), STRIPLINE, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

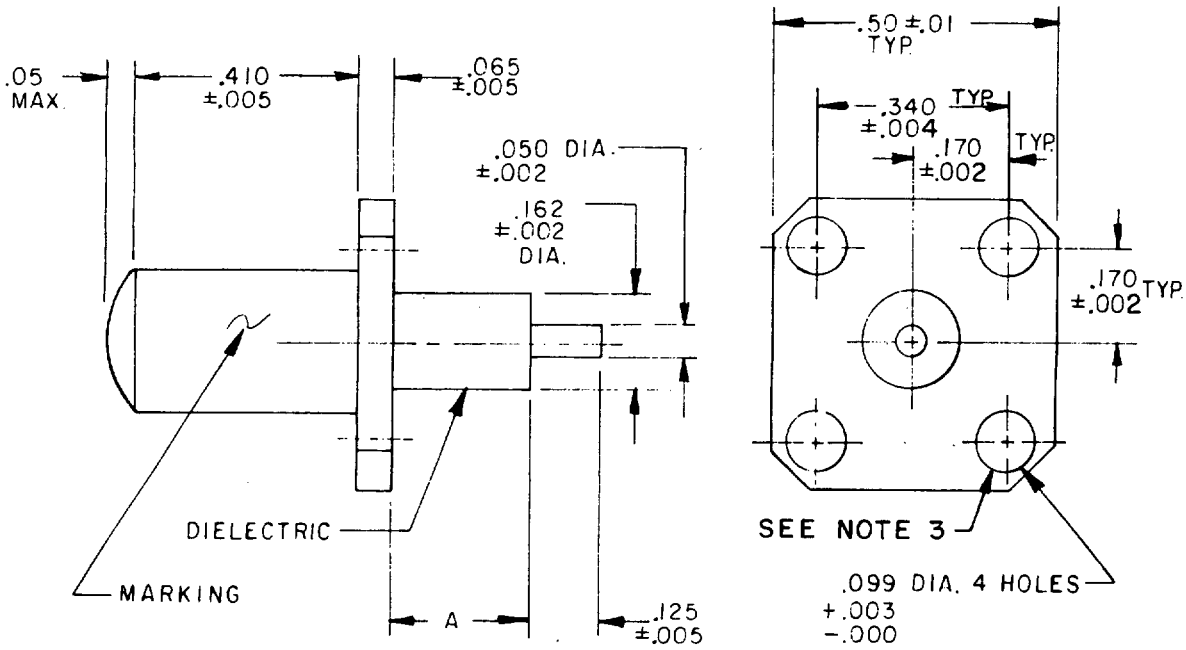

INCHES	MM
.002	.05
.003	.08
.004	.10
.005	.13
.01	.3
.050	1.27
.05	1.3
.065	1.65
.099	2.51
.125	3.18
.162	4.11
.170	4.32
.340	8.64
.380	9.65
.390	9.91
.410	10.41
.50	12.7

Dash number	A
01	.380 ±.005
02	.390 ±.005

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Hole pattern is for a SMA connector.

FIGURE 1. Dimensions and configuration.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Electrical characteristics:

Operating frequency:

Dash number 01 - 4.400 to 5.000 GHz.
Dash number 02 - 7.125 to 8.400 GHz.

Voltage standing wave ratio (VSWR): (1.05 +.01f):1, maximum. Where f is the frequency in GHz.

Power:

Average: .5 watt, maximum.

Peak: .5 kilowatt, maximum.

NOTE: Power input overload is 200 percent of average power for 1 minute.

Nominal characteristic impedance: 50 ohms.

Materials:

Body: Corrosion-resistant steel per QQ-S-763.

Finish: Passivated per QQ-P-35.

Pin contact: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: .13 ounce, maximum.

Ambient temperature range:

Operating: -55°C to +125°C.

Nonoperating (storage): -65°C to +125°C.

Solderability: Method 208 of MIL-STD-202; the following details and exception shall apply:

a. Number of terminations of each part to be tested - One contact.
b. Special preparation of terminations - No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.
c. Depth of immersion - The entire surface of the contact shall be covered.
d. Method of mounting - The dummy load shall be mounted onto a heat sink.
e. Examination of terminations - There shall be no evidence of pinholes and blistering.

NOTE: This test shall be performed after the visual and mechanical inspection in qualification.

Part number: M39030/18-(dash number from figure 1).

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	28528	1133180G1	
01	16179	20020-204-2	
02	28528	1133180G2	
02	16179	20020-204-3	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0926-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.