
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL,
TYPE XIV (TAB CENTER CONTACT), STRIPLINE, HIGH POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

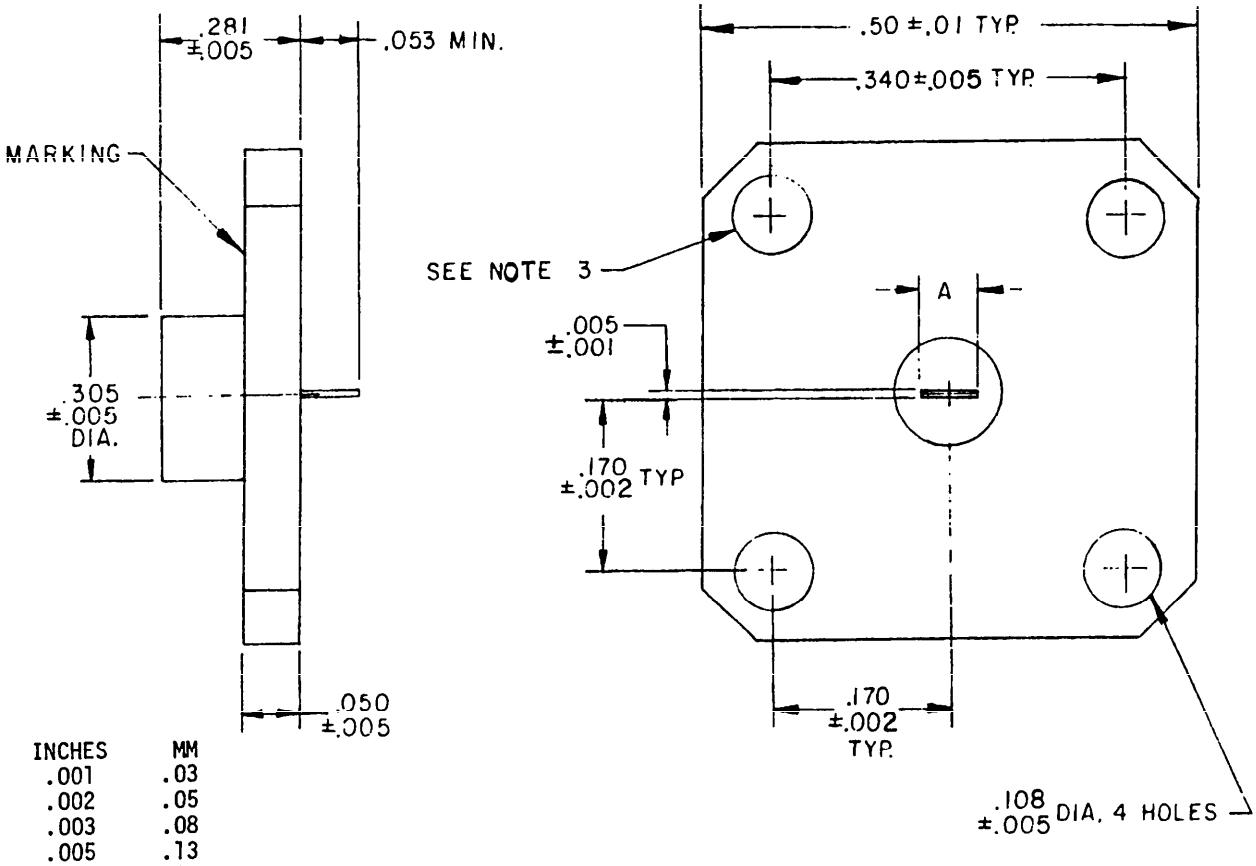

INCHES	MM
.001	.03
.002	.05
.003	.08
.005	.13
.01	.3
.025	.64
.050	1.27
.053	1.35
.105	2.67
.170	4.32
.281	7.14
.305	7.75
.340	8.64
.50	12.7

Dash number	A
01	.025 ±.002
02	.050 ±.002

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Hole pattern is for a SMA connector.

FIGURE 1. Dimensions and configuration.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Electrical characteristics:

Operating frequency: DC to 12.0 GHz.

Voltage standing wave ratio (VSWR):

1.15:1, maximum (DC to 4.0 GHz).
1.35:1, maximum (4.0 to 8.0 GHz).
1.50:1, maximum (8.0 to 12.0 GHz).

Power:

Average: 20 watts, maximum.

Peak: 20 kilowatts, maximum.

NOTE: Power input is specified at a heat sink temperature of +60°C.

Nominal characteristic impedance: 50 ohms.

Materials:

Body: Aluminum alloy per QQ-A-225.

Finish: Chemical conversion coating per MIL-C-5541.

Tab contact: Beryllium copper per QQ-C-530.

Finish: Gold plated per MIL-G-45204, type II, class 2.

Weight: .25 ounce, maximum.

Ambient temperature range:

Operating: -65°C to +125°C.

Nonoperating (storage): -65°C to +125°C.

Solderability: Method 208 of MIL-STD-202; the following details and exception shall apply:

a. Number of terminations of each part to be tested - One contact.
b. Special preparation of terminations - No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.
c. Depth of immersion - The entire surface of the contact shall be covered.
d. Method of mounting - The dummy load shall be mounted onto a heat sink.
e. Examination of terminations - There shall be no evidence of pinholes and blistering.

NOTE: This test shall be performed after the visual and mechanical inspection in qualification.

Part number: M39030/19-(dash number from figure 1).

NOTE: Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	31395	112641-4	
01	24602	8484	
02	31395	112641-5	
02	24602	8485	

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0926-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-D-39030/19

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:54Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:54Z
Check the source to verify that this is the current version before use.