METRIC

MIL-PRF-55365/8D
3 July 1997
SUPERSEDING
MIL-C-55365/8C
6 October 1994

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, CHIP, FIXED, TANTALUM, ESTABLISHED RELIABILITY, STYLE CWR11 (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-55365.

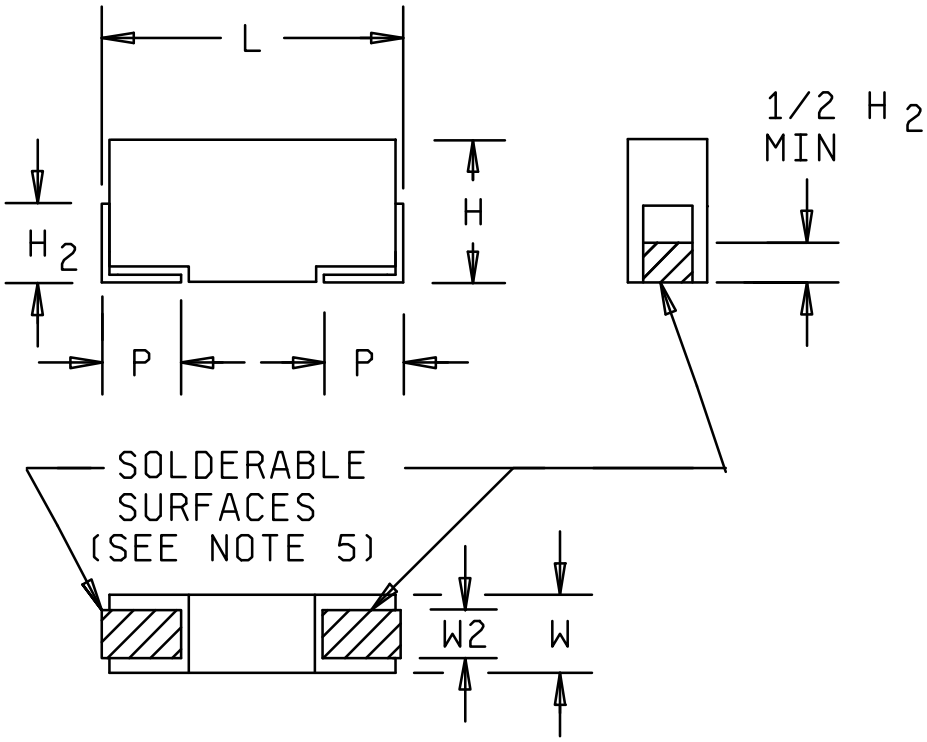

FIGURE 1. Style CWR11 (molded) capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

Dimensions						
Case code	H	H_2 (min)	L	P ±0.3 (0.12)	W	W_2 ±0.1 (.004) (see note 6)
A	1.6 ±.2 (.063 ±.008)	0.7 (0.28)	3.2 ±.2 (.126 ±.008)	0.8 (.031)	1.6 ±.2 (0.63 ±.008)	1.2 (.047)
B	1.9 ±.2 (.075 ±.008)	0.7 (0.28)	3.5 ±.2 (.138 ±.008)	0.8 (.031)	2.8 ±.2 (.110 ±.008)	2.2 (.087)
C	2.5 ±.3 (.098 ±.012)	1.0 (.039)	6.0 ±.3 (.236 ±.012)	1.3 (.051)	3.2 ±.3 (.126 ±.012)	2.2 (.087)
D	2.8 ±.3 (.110 ±.012)	1.0 (.039)	7.3 ±.3 (.287 ±.012)	1.3 (.051)	4.3 ±.3 (.169 ±.012)	2.4 (.094)

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses and are given for general information only.
3. These capacitors are designed for mounting by dip or wave soldering, reflow soldering, thermo-compression bonding, or other conventional means.
4. The anode (+) terminal shall be indicated by a marking on the case or by bevel on anode end.
5. Solderable surfaces are only those surfaces designated as such. Termination edges are not considered solderable.
6. Applicable to solderable surfaces only. The configuration of the nonsolderable area is optional.
7. For hot solder dipped terminations (termination finish code C), add 0.38 (0.15 inch) to the termination dimension tolerances.

FIGURE 1. Style CWR11 (molded) capacitors - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Termination finish: In accordance with MIL-PRF-55365.

DC rated voltage: See table I. Above +85°C, voltage derating is required (see MIL-PRF-55365).

Operating temperature range: -55°C to +125°C.

Product level designator: In accordance with MIL-PRF-55365.

DC leakage (DCL): See table I.

Capacitance (Cap.): See table I.

Cap. tolerance: ±5 percent (J), ±10 percent (K), or ±20 percent (M).

Dissipation factor (DF): See table I.

Equivalent series resistance (ESR) at 100 kHz: In accordance with MIL-PRF-55365. See table I.

Resistance to soldering heat: In accordance with MIL-PRF-55365.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

Stability at low and high temperatures: In accordance with MIL-PRF-55365.

Step 1 (+25°C):	DCL	-	See table I.
	Cap.	-	Within tolerance of table I value.
	DF	-	See table I.
	ESR	-	See table I.
Step 2 (-55°C):	ΔCap.	-	Shall not exceed ±10 percent of initial measurement.
	DF	-	See table I.
Step 3 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Shall not exceed ±5 percent of initial +25°C measurement.
	DF	-	See table I.
Step 4 (+85°C):	DCL	-	See table I.
	ΔCap.	-	Shall not exceed ±10 percent of initial +25°C measurement.
	DF	-	See table I.
Step 5 (+125°C):	DCL	-	See table I.
	ΔCap.	-	Shall not exceed ±12 percent of initial +25°C measurement.
	DF	-	See table I.
Step 6 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Shall not exceed ±5 percent of initial +25°C measurement.
	DF	-	See table I.
	ESR	-	See table I.

Life: Method 108 of MIL-STD-202.

2,000 hours:

At 25°C:	DCL	-	See table I.
	ΔCap.	-	Within ±5 percent of initial measured value.
	DF	-	See table I.
At 85°C:	DCL	-	See table I.
At 125°C:	DCL	-	See table I.

Surge current (optional): This test, when applicable, shall be performed on a 100 percent basis following voltage conditioning of the qualification and group A tests. Capacitors shall be subjected to ten consecutive cycles under the following conditions:

Temperature: Option A: +25° ±5°C; option B: -55°C ±5°C and +85°C ±5°C.

Applied voltage: Rated dc voltage ±2 percent from a power source having an energy storage bank of 50,000 μf (minimum) across the output terminals.

Charge cycle: 4 seconds ±1 second.

Discharge cycle: 4 seconds ±1 second to a voltage below 1 percent of rated voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE I. Style CWR11 characteristics

Pin 1/	DC rated voltage (+85°C)	Cap. (nom)	DC Leakage (max)			Dissipation factor (max)			Max ESR 100 kHz	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	+25°C	
	Volts	µF	µA	µA	µA	%	%	%	Ohms	
CWR11-C-225---	4	2.2	0.5	5.0	6.0	6	9	9	8.0	A
CWR11-C-475---	4	4.7	0.5	5.0	6.0	6	9	9	8.0	A
CWR11-C-685---	4	6.8	0.5	5.0	6.0	6	9	9	5.5	B
CWR11-C-106---	4	10.0	0.5	5.0	6.0	6	9	9	4.0	B
CWR11-C-156---	4	15.0	0.6	6.0	7.2	6	9	9	3.5	B
CWR11-C-336---	4	33.0	1.3	13.0	15.6	6	9	9	2.2	C
CWR11-C-686---	4	68.0	2.7	27.0	32.4	6	9	9	1.1	D
CWR11-C-107---	4	100.0	4.0	40.0	48.0	8	12	12	0.9	D
CWR11-D-155---	6	1.5	0.5	5.0	6	6	9	9	8.0	A
CWR11-D-225---	6	2.2	0.5	5.0	6	6	6	9	8.0	A
CWR11-D-335---	6	3.3	0.5	5.0	6	6	9	9	8.0	A
CWR11-D-475---	6	4.7	0.5	5.0	6	6	9	9	5.5	B
CWR11-D-685---	6	6.8	0.5	5.0	6	6	6	9	4.5	B
CWR11-D-106---	6	10.0	0.6	6.0	7.2	6	9	9	3.5	B
CWR11-D-156---	6	15.0	0.9	9.0	10.8	6	6	9	3.0	C
CWR11-D-226---	6	22.0	1.4	14.0	16.8	6	9	9	2.2	C
CWR11-D-476---	6	47.0	2.8	28.0	33.6	6	6	9	1.1	D
CWR11-D-686---	6	68.0	4.3	43.0	51.6	6	9	9	0.9	D
CWR11-F-105---	10	1.0	0.5	5.0	6.0	4	6	6	10.0	A
CWR11-F-155---	10	1.5	0.5	5.0	6.0	6	6	9	8.0	A
CWR11-F-225---	10	2.2	0.5	5.0	6.0	6	9	9	8.0	A
CWR11-F-335---	10	3.3	0.5	5.0	6.0	6	9	9	5.5	B
CWR11-F-475---	10	4.7	0.5	5.0	6.0	6	9	9	4.5	B
CWR11-F-685---	10	6.8	0.7	7.0	8.4	6	9	9	3.5	B
CWR11-F-156---	10	15.0	1.5	15.0	18.0	6	6	9	2.5	C
CWR11-F-336---	10	33.3	3.3	33.0	39.6	6	9	9	1.1	D
CWR11-F-476---	10	47.0	4.7	47.0	56.4	6	9	9	0.9	D
CWR11-H-684---	15	0.68	0.5	5.0	6.0	4	6	6	12.0	A
CWR11-H-105---	15	0.5	0.5	5.0	6.0	4	6	6	10.0	A
CWR11-H-155---	15	1.5	0.5	5.0	6.0	6	9	9	8.0	A
CWR11-H-225---	15	2.2	0.5	5.0	6.0	6	9	9	5.5	B
CWR11-H-335---	15	3.3	0.5	5.0	6.0	6	8	9	5.0	B
CWR11-H-475---	15	4.7	0.7	7.0	8.4	6	9	9	4.0	B
CWR11-H-106---	15	10.0	1.6	16.0	19.2	6	8	9	2.5	C
CWR11-H-226---	15	22.0	3.3	33.0	39.6	6	8	9	1.1	D
CWR11-H-336---	15	33.3	5.3	53.0	63.6	6	9	9	0.9	D
CWR11-J-474---	20	0.47	0.5	5.0	6.0	4	6	6	14.0	A
CWR11-J-684---	20	0.68	0.5	5.0	6.0	4	6	6	12.0	A
CWR11-J-105---	20	1.0	0.5	5.0	6.0	4	6	6	10.0	A
CWR11-J-155---	20	1.5	0.5	5.0	6.0	6	9	9	6.0	B
CWR11-J-225---	20	2.2	0.5	5.0	6.0	6	8	9	5.0	B
CWR11-J-335---	20	3.3	0.7	7.0	8.4	6	9	9	4.0	B

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE I. Style CWR11 characteristics - Continued.

Pin 1/	DC rated voltage (+85°C)	Cap. (nom)	DC Leakage (max)			Dissipation factor (max)			Max ESR 100 kHz	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	+25°C	
	Volts	µF	µA	µA	µA	%	%	%	Ohms	
CWR11-J-475---	20	4.7	1.0	10.0	12.0	6	8	9	3.0	C
CWR11-J-685---	20	6.8	1.4	14.0	16.8	6	9	9	2.4	C
CWR11-J-156---	20	15.0	3.0	30.0	36.0	6	8	9	1.1	D
CWR11-J-226---	20	22.0	4.4	44.0	52.8	6	9	9	0.9	D
CWR11-K-334---	25	0.33	0.5	5.0	6.0	4	6	6	15.0	A
CWR11-K-474---	25	0.47	0.5	5.0	6.0	4	6	6	14.0	A
CWR11-K-684---	25	0.68	0.5	5.0	6.0	4	6	6	7.5	A
CWR11-K-105---	25	1.0	0.5	5.0	6.0	4	6	6	6.5	B
CWR11-K-155---	25	1.5	0.5	5.0	6.0	6	8	9	6.5	B
CWR11-K-225---	25	2.2	0.6	6.0	7.2	6	9	9	3.5	B
CWR11-K-335---	25	3.3	0.9	9.0	10.8	6	8	9	3.5	C
CWR11-K-475---	25	4.7	1.2	12.0	14.4	6	9	9	2.5	C
CWR11-K-685---	25	6.8	1.7	17.0	20.4	6	9	9	1.4	D
CWR11-K-106---	25	10.0	2.5	25.0	30.0	6	8	9	1.2	D
CWR11-K-156---	25	15.0	3.8	38.0	45.6	6	9	9	1.0	D
CWR11-M-104---	35	0.10	0.5	5.0	6.0	4	6	6	24.0	A
CWR11-M-154---	35	0.15	0.5	5.0	6.0	4	6	6	21.0	A
CWR11-M-224---	35	.22	0.5	5.0	6.0	4	6	6	18.0	A
CWR11-M-334---	35	.33	0.5	5.0	6.0	4	6	6	15.0	A
CWR11-M-474---	35	.47	0.5	5.0	6.0	4	6	6	10.0	B
CWR11-M-684---	35	.68	0.5	5.0	6.0	4	6	6	8.0	B
CWR11-M-105---	35	1.0	0.5	5.0	6.0	4	6	6	6.5	B
CWR11-M-155---	35	1.5	0.5	5.0	6.0	6	8	9	4.5	C
CWR11-M-225---	35	2.2	0.8	8.0	9.6	6	8	9	3.5	C
CWR11-M-335---	35	3.3	1.2	12.0	14.4	6	8	9	2.5	C
CWR11-M-475---	35	4.7	1.7	17.0	20.4	6	8	9	1.5	D
CWR11-M-685---	35	6.8	2.4	24.0	28.8	6	9	9	1.3	D
CWR11-N-104---	50	.10	0.5	5.0	12	6	8	8	22.0	A
CWR11-N-154---	50	.15	0.5	5.0	6.0	4	6	6	17.0	B
CWR11-N-224---	50	.22	0.5	5.0	6.0	4	6	6	14.0	B
CWR11-N-334---	50	.33	0.5	5.0	6.0	4	6	6	12.0	B
CWR11-N-474---	50	.47	0.5	5.0	6.0	4	6	6	8.0	C
CWR11-N-684---	50	.68	0.5	5.0	6.0	4	6	6	7.0	C
CWR11-N-105---	50	1.0	0.5	5.0	6.0	4	6	6	6.0	C
CWR11-N-155---	50	1.5	0.8	8.0	9.6	6	8	9	4.0	D
CWR11-N-225---	50	2.2	1.1	11.0	13.2	6	8	9	2.5	D
CWR11-N-335---	50	3.3	1.7	17.0	20.4	6	9	9	2.0	D
CWR11-N-475---	50	4.7	2.4	24.0	28.8	6	9	9	1.5	D

1/ Complete PIN shall include additional symbols to indicate termination finish, capacitance tolerance, product level, and, if applicable, surge current option letter A (+25°C ±5°C) or B (-55°C ±5°C and +85°C ±5°C). If optional surge current is not required, the last "-" shall be deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

The total dc resistance (excluding the capacitor) including the wiring, fixturing, and output impedance of the regulated power supply to each test position during the charging cycle shall be 1 ohm ±0.2 ohm.

On completion of the test, the capacitors shall meet the following requirements:

DCL: See table I.

CAP.: Shall meet the initial measured value.

DF: See table I.

Marking: In accordance with MIL-PRF-55365, to be marked on top of case as follows: Print orientation is optional.

J	(+)	polarity stripe, J = JAN
105X	-	capacitance in picofarad code manufacturer's identifier

J	(+)	polarity stripe, J = JAN
105 35X	- -	capacitance in picofarad code rated voltage; manufacturer's identifier

Case code A

Case codes B, C, and D

X	(+)	polarity stripe, X = manufacturer's identifier
105J	-	capacitance in picofarad code; J = JAN

Alternate case code A marking

At the option of the manufacturer, the lot date code may be marked on the top of the case for any case code.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99
NASA - NA

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-1935-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.