INCH-POUND

MIL-P–62211B(AR)
AMENDMENT 3
15 JUNE 1998
SUPERSEDING
AMENDMENT 2
07 JULY 1989

MILITARY SPECIFICATION

POWER SUPPLY, LOW VOLTAGE: 11746916

MIL-P-62211 was inactivated after 15 August 1997 for new design.

This amendment forms a part of MIL-P –62211B (AR), dated 30 JUNE 1981, and is approved for use by the US Army Armament, Research, Development, and Engineering Center, and is available for use by all Departments and Agency of the Department of Defense.

PAGE 2

2.1: Add "(REF)" after the following drawing numbers as shown:

"11750221 (REF)
11821457 (REF)
11821458 (REF)
11821647 (REF)
11821648 (REF)
11823313 (REF)"

PAGE 6

Table I:

Item 1.5.1, Characteristics: Delete "15 ohms ± 5 percent, ¼ Q" and substitute "15K ohms ± 5 percent, ¼ W".

Item 1.7.1 Characteristics: Delete "300 ohms ± 5 percent, ¼ W" and substitute "300K ohms ± 5 percent, ¼ W".

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

PAGE 8

3.3.8: Line 1: Delete “item 1.1 of table I, with the tank power” and substitute “item 1.1 of table I, with item 1.7.1 of table I connected as specified and with the tank power”.

PAGE 9

Figure 1: Delete in its entirety and substitute the following:

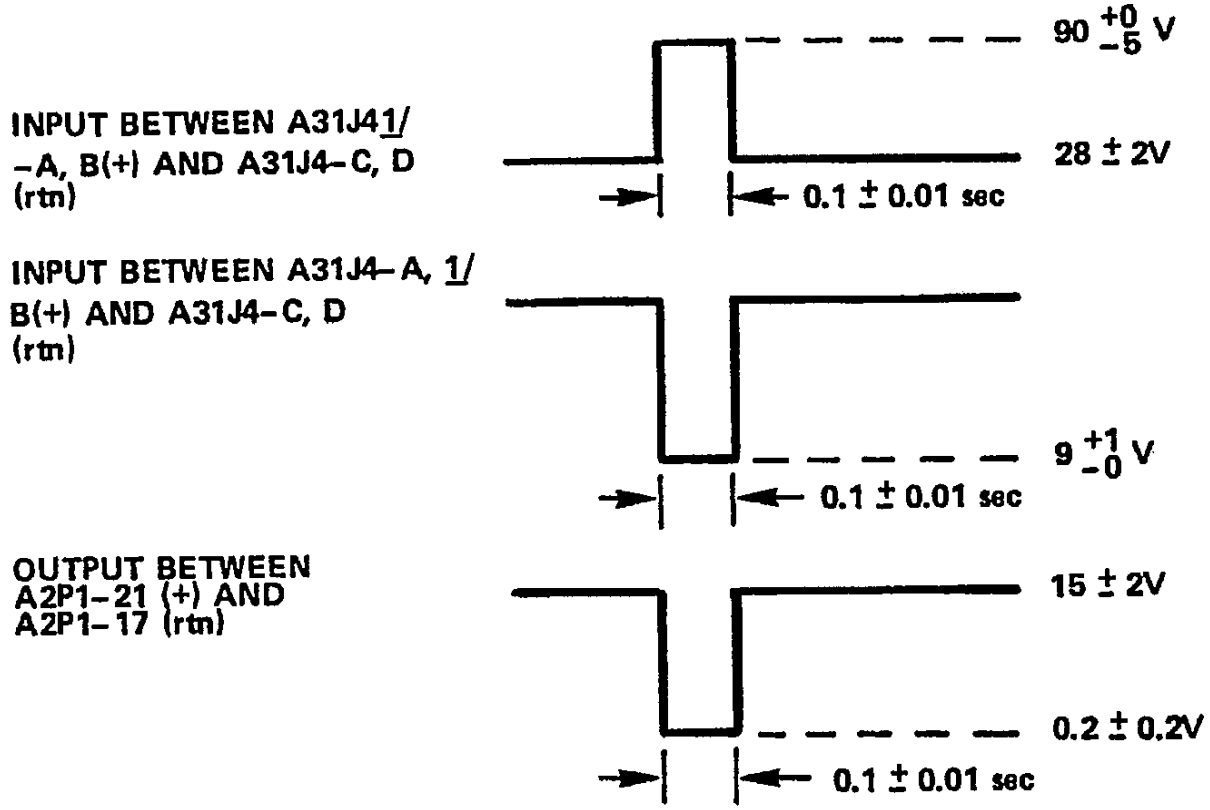

FIGURE 1. Power transients and +15V interlock.

PAGE 10

* Figure 2: Delete in its entirety and substitute the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

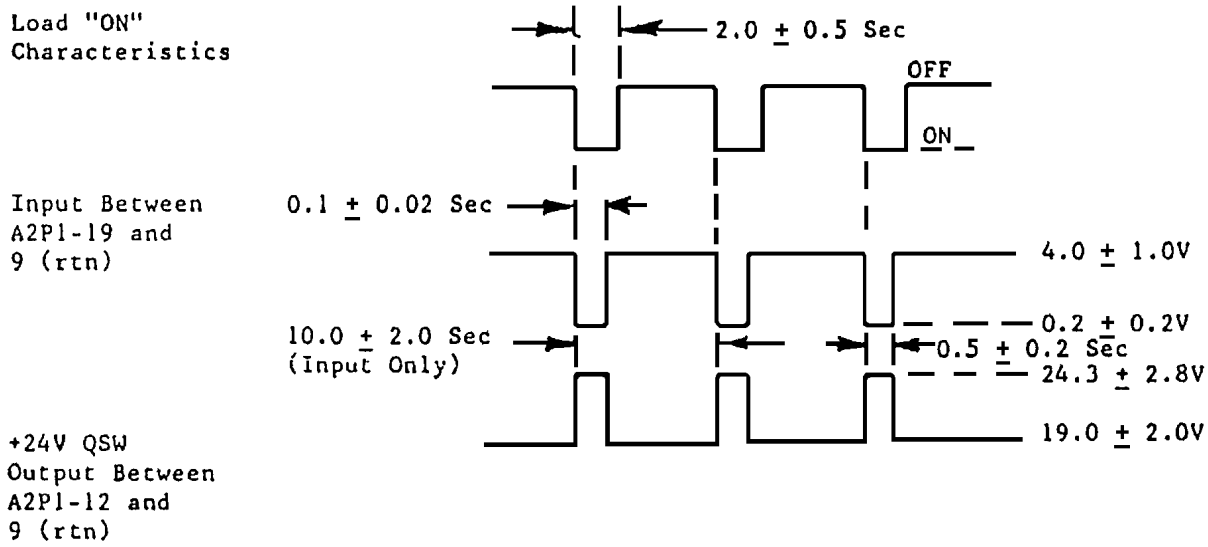

FIGURE 2. "Q" motor on-time limiting signal characteristics

* Figure 3: Delete in its entirety and substitute the following:

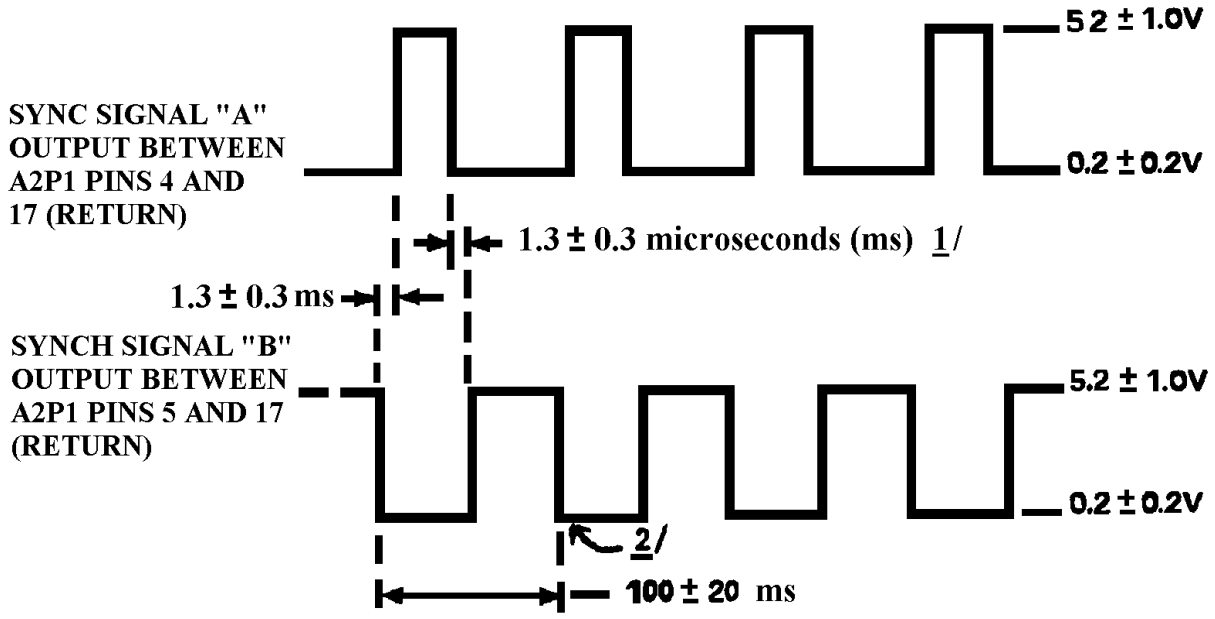

FIGURE 3. Sync SIG A and Sync SIG B output characteristics

1/ Time intervals are specified at the 50% point of the pulse amplitude.

2/ Overshoot on leading and tailing edge is allowable (Neg shoot approx -2V at 6.2 microsec)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

PAGE 13

* Table 3, Item 5: Delete “-41.5 ± 0.5V” and substitute “+41.5 ± 0.5V”.

PAGE 19

4.6.1: Delete in its entirety and substitute the following:

“4.6.1 Test equipment. The test equipment in table VII may be used where specified to perform the required test. If alternate test equipment is to be used, the designs shall be submitted for review and approval to U.S. Army TACOM ARDEC, Picatinny Arsenal, NJ 07806-5000 ATTN: AMSTA-AR-QAC-F.”

NOTE: The margins of this amendment are marked with asterisk or vertical lines to indicate where changes (additions, modifications, corrections, and deletions) from the previous amendment were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army – AR

Preparing activity:
Army – AR

(Project 1240-0041)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.