MILITARY SPECIFICATION

SHIRTS, OPERATING, SURGICAL, MAN'S, COTTON, SLEEVELESS, STYLE A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and four sizes of a Style A, sleeveless, cotton, man's, surgical, operating shirt.

1.2 Classification. The shirts shall be furnished in the following sizes, as specified (see 6.2):

SIZES

Small	Medium	Large	Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
UU-P-268	Paper, Kraft, Wrapping
CCC-C-444	Cloth, Jean, Cotton
DDD-L-20	Label, For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-TEST METHOD STD. NO. 191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Color Association of the United States, Incorporated

TCA Cable Numbers and Colors

(Application for TCA Cable numbers and colors should be addressed to the Color Application of the United States, Incorporated, 200 Madison Avenue, New York, New York 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Fabric.

3.1.1.1 Shirts. The shirts shall be fabricated from the cotton jean cloth conforming to CCC-C-444, Class 2, dyed to approximately match Grayish Green 180, except for the following:

a. The pH value of the water extract of the finished fabric shall be 5.0 to 9.0.

b. The dyed and finished fabric shall show at least "fair" colorfastness to light when exposed for 40 standard hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

3.1.1.2 Pockets and facings. The pockets and facings shall be fabricated from the shirt cloth, 3.1.1.1.

3.1.2 Thread. All the sewing operations shall be performed with the cotton thread conforming to V-T-276, Type 1A3 or 1B3, Ticket Number 50, 3 ply and Ticket Number 70, 2 ply (see Table I). When Stitch Type 401 is utilized, Ticket Number 50, 3 ply may be used for the bobbin or looper thread instead of Ticket Number 70, 2 ply. The color of the thread shall approximately match the color of the shirt fabric, 3.1.1.1. The thread shall show good colorfastness to light, laundering and perspiration.

3.2 Design. The shirt shall be a sleeveless slip-over style with a loose fitting oval neck, left breast patch pocket and a hemmed bottom. The shirt shall conform in appearance to Figure 1.

3.3 Construction.

3.3.1 Cutting. The shirts shall be cut in strict accordance with the patterns furnished by the Government (see 6.4)., which provide for seam allowance, size, shape, and placement of the pocket, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay.

3.3.2 Shade and size marking. All the component parts of the shirts shall be marked or ticketed by any commercial method to insure a uniform shade and proper assembly throughout the shirt. No metal fastening device or sewn-on ticket shall be used. The shade and size markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside of the shirt and are not deleterious to the cloth The markings, which are placed on the seam allowance, shall not be visible on the outerside. The adhesive type shade and size marking tickets may be used for the shade and size markings, provided they conform to 3.3.2.1 The assembled shirt shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

3.3.2.1 Adhesive shade and size marking tickets. The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermoactivated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

3.3.3 Replacement of defective components and cut parts. Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any material defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the shirts shall conform to Table I. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table I. When Stitch Type 401 is used, the looper thread shall be on the innerside of the garment. The gage of the stitching for all the double lapped, double-stitched seams shall be 3/16 to 1/4 inch. The outer row of the stitching shall be 1/16 to 1/8 inch from the seam edge. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the shirt shall be caught in an unrelated operation or seam. All the seam edges shall be properly forced out and shall not contain any folds. The facings shall be uniform in width, smooth and flat. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the interior or exterior of the shirt.

3.3.4.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for the double rows of stitches. The ends of Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched, by overlapping on themselves, a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements. The shirts shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the shirts are permissable, provided the thread does not show on the surface of the assembled shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE I

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Hem pocket					
	a Turn the top of the pocket down with the raw edge turned under and stitch to the pocket 1/16 to 1/8 inch from the edge of the hem. The width of the hem shall be 1 ± 1/8 inch.	301	EFb-1	10 to 14	50/3	50/3
2.	Set pocket					
	a. Turn under raw edges of the sides and bottom for the amount specified in the patterns and stitch the pocket to the left front breast in the position indicated by the patterns. The stitching shall be 1/16 to 1/8 inch from the pockets edges. Continue stitching the sides of the pocket opening for the width of the hem with a second row of stitching 1/8 to 1/4 inch from the first row.	301	LSd-1	10 to 14	50/3	50/3
	b. The attached pocket shall be 5 ± 1/4 inches long and 4-1/4 ± 1/4 inches wide The width of the opening, the distance between the inner rows of stitching, shall be a minimum of 3-1/2 inches.					
3.	Join the shoulder seams					
	a. Join the front and back parts at the shoulder with a double-lapped double-stitched seam. The back parts be lapped over the front parts.	301 or	LSc-2	10 to 14	50/3	50/3
		401	LSc-2	10 to 14	50/3	70/2
4.	Attach the neck facings					
	a. Join together the ends of the front and back neck facings and open the seams.	301 or	SSa-1	10 to 14	50/3	50/3
		401	SSa-1	10 to 14	50/3	70/2
	b. Superimpose the front and back neck edges onto the back of the neck facing until the top edges coincide. Join together with one row of stitches 1/8 to 1/4 inch from the edges. Turn the facing onto the innerside of the shirt and top stitch with one row of stitches 1/16 to 1/8 inch from the turned edge.	301 or	SSe-2(a)	10 to 14	50/3	50/3
		401 and 301	SSe-2(a)	10 to 14	50/3	70/2
			SSe-2(b)	10 to 14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
4.	Continued					
	c Smooth out the neck facing Fold under the bottom raw edges and attach to the innerside of the shirt with one row of stitches 1/16 to 1/8 inch from the folded edge.	301	LSa-1	10 to 14	50/3	50/3
	d. The attached facing shall be on the innerside of the shirt. The facing shall be 1-1/4 ± 1/4 inches wide.					
5.	Join the side seams					
	a Join each side seam with a double lapped, double stitched seam. The seam may lap in either direction.	301	LSc-2	10 to 14	50/3	50/3
		or 401	LSc-2	10 to 14	50/3	70/2
6.	Attach the facings to the armholes					
	a. Join together the ends of the front and back armhole facings and open the seams.	301 or	SSa-1	10 to 14	50/3	50/3
		401	SSa-1	10 to 14	50/3	70/2
	b. Superimpose the front edges of the armhole onto the back of the facing	301	SSe-2(a)	10 to 14	50/3	50/3
	until the front edges coincide. Join	or 401	SSe-2(a)	10 to 14	50/3	70/2
	together with one row of stitches 1/8	and				
	to 1/4 inch from the edges. Turn the facing onto the innerside of the armhole and top stitch with one row of stitches 1/16 to 1/8 inch from the turned edge	301	SSe-2(a)	10 to 14	50/3	50/3
	c. Smooth out the armhole facing. Fold under the back raw edges and attach to the innerside of the armhole with one row of stitches 1/16 to 1/8 inch from the folded edge.	301	LSd-1	10 to 14	50/3	50/3
	d. The attached facing shall be on the innerside of the armhole. The facing shall be 1-1/4 ± 1/4 inches wide					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
7.	Hem the bottom of the shirt					
	a. Fold under the bottom of the shirt with the raw edges turned under to form a hem 1 ± 1/4 inch wide. The stitching shall be 1/16 to 1/8 inch from the edge.	301	EFb-1	10 to 14	50/3	50/3
8.	Attach label					
	a. Position the identification label on the center of the back, on the innerside of the garment, within 1/4 inch, with the top of the label a maximum of 1/4 inch below the bottom of the neck facing. Attach the label on all four sides. When a heat attachable label is used, it may be attached by heat.	301	LSbj-1	10 to 14	50/3	50/3
	b. The top edge of the label may be caught in the bottom seam of the neck facing. Attach the remaining three sides.	301	LSbj-1	10 to 14	50/3	50/3
9.	Trim all thread ends and remove all thread scraps and foreign matter.					
10	Fold each shirt to an approximate size of 15-1/2 by 10 inches without creating any wrinkles or creases.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The shirts after assembly shall conform to the dimensions for the different sizes specified in Table II when measured as specified in 4.3.4.

TABLE II
SHIRT DIMENSIONS IN INCHES

Location	SIZE				Tolerance
	Small	Medium	Large	Extra Large	
Chest	22-1/8	24-1/8	26-1/8	28-1/4	± 1/2
Back Length	30	30-1/2	31	31-1/2	± 1/2
Front Length	24-1/4	24-5/8	24-7/8	25-3/8	± 1/2
Bottom Width	24-1/4	26-1/4	28-3/8	30-3/8	± 1/2

3.5 Label. The identification label for each shirt shall conform to DDD-L-20, Type I, Class 1, Launderable Label, except that the color of the label shall be one of the following colors for the appropriate shirt size:

COLOR	TCA CABLE NUMBER	SHIRT SIZE
Peach Blossom	70098	Small
Lemon Yellow	70205	Medium
Indian Orange	70072	Large
Primitive Green	70167	Extra Large

When inspected as specified in 4.3.5, the color of the label shall approximately match the crepe side of the applicable TCA Cable Number. The color of the label shall be obtained with vat or naphthol dyes and shall show at least "good" colorfastness to laundering transference and at least "fair" colorfastness to accelerated laundering. The color of the printing medium shall be black. The label shall be a heat attachable or a sew-on type. When heat attachable labels are used, the back of the label shall contain a thermoplastic compound suitable for being attached to the shirt by heat. When adhered to the shirt, the label shall remain completely adhered without any evidence of separation when inspected as specified in 4.3.4. The size of the label shall be adequate to contain the following information:

SHIRT, OPERATING, SURGICAL, MAN'S,
COTTON, SLEEVELESS, TYPE A
MIL-S-37129
SIZE
CONTRACT OR ORDER NUMBER
NSN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

3.5.1 Alternate. An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5. The printing medium and printing shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The color and colorfastness of the label shall be as specified in 3.5. The label shall contain the same information as specified in 3.5.

3.6 Workmanship. The shirts shall not contain any spot, stain, hole, abraded area, tear, cut, mend patch, scorch, or needle chew. The shirts shall conform to the quality of grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified, or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with Table III, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of the physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Labels. An inspection lot size shall be expressed in units of one label and shall consist of all the labels received by the shirt manufacturer at one time. The sample unit for inspection shall be one label.

4.2.1.1.2 Alternate identification label fabric. An inspection lot size shall be expressed in units of one linear yard of the alternate identification label fabric and shall consist of all the alternate identification label fabric received by the shirt manufacturer at one time. The sample unit for inspection shall be one linear yard of the alternate identification label fabric.

4.2.1.1.3 Shirts. An inspection lot size shall be expressed in units of one shirt made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one shirt.

4.2.1.1.4 Preparation of delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing shirts of one size, fully prepared for delivery from essentially the same materials and components. The sample unit for inspection shall be one shipping container, containing shirts of one size, fully prepared for delivery with the exception that it need not be sealed.

4.2.1.2 Sampling for tests and examinations of the label, alternate identification label fabric, shirts and preparation for delivery. The sample size, acceptance criteria, tests and examinations required for the alternate identification label fabric, shirts, or the preparation for delivery, as applicable shall be as specified in Table III.

TABLE III
SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS
OF THE LABELS, ALTERNATE IDENTIFICATION LABEL FABRIC,
SHIRTS AND PREPARATION FOR DELIVERY

ITEM	INSPECTION	PARAGRAPH		SAMPLE SIZE	ACCEPTANCE CRITERIA	
		REQUIREMENT	METHOD			
Labels 1/	Adherence 5/	3.5	4.3.1	2/	2/	4/
	Color Comparison 6/	3.5	4.3.5	2/	2/	4/
Alternate Identification Label Fabric 1/	Cotton Identification	3.5.1	4.3.2	3/	3/	4/
	Weight	3.5.1	4.3.2	3/	3/	4/
	Kind of Fabric	3.5.1	4.3.2.1	3/	3/	4/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

ITEM	INSPECTION	PARAGRAPH REQUIREMENT	PARAGRAPH METHOD	SAMPLE SIZE	ACCEPTANCE CRITERIA
Shirts	Visual Examination	3.2 through 3.3.5 and 3.5 through 3.6	4.3.3.1	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for Major defects and 10.0 defects per 100 units for total (major plus minor) defects
	Dimensional check	3.4	4.3.3.1	Inspection Level S-2	An acceptable quality level of 4.0 defects per 100 units
	Preparation for Delivery	Section 5	4.3.3.2	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units

/ The inspection of the labels and the alternate identification label fabric, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

// The sampling for the testing of the labels shall be in accordance with 4.2.1.1.1 and as follows:

Lot Size (Number of labels)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more of the sample units fail to meet the adherence or color comparison requirement, as applicable.

/// The sampling for the testing of the alternate identification label fabric shall be in accordance with 4.2.1.1.2 and as follows:

Lot Size (Yards)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in Table III. Each sample unit taken for inspection shall be used to determine all the characteristics of the alternate identification label fabric specified in Table III.

4/ A certificate of quality shall be submitted and will be acceptable for the stated requirement (see 4.1.2).

5/ This inspection is only applicable to the labels with thermoplastic backing.

6/ This inspection is applicable to all the kinds of labels.

4.3 Inspection methods.

4.3.1 Adherence. The label with thermoplastic backing shall be attached to the shirt fabric with heat in accordance with the instruction of the manufacturer of the label with thermoplastic backing. The attached label shall then be laundered for eight consecutive times in accordance with FED-TEST METHOD-STD. NO. 191, Method 5605. Upon completion of the eighth laundering, the label shall be examined for any evidence of separation from the fabric (see 3.5).

4.3.2 Alternate identification label fabric. The characteristics of the alternate identification label fabric shall be determined in accordance with the inspection methods of FED-TEST METHOD-STD. NO. 191 specified in Table IV and 4.3.2.1.

TABLE IV
ALTERNATE IDENTIFICATION LABEL FABRIC PROPERTIES

Characteristic	FED-STD-191 Method
Cotton Identification	1200
Weight	5041

4.3.2.1 Kind of alternate identification label fabric. The kind of fabric used for the alternate identification label shall be determined by any standard commercial method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

4.3.3 Visual examination.

4.3.3.1 Shirts. Each shirt selected in accordance with Table III as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables V and VI, as applicable, shall be used to classify and enumerate the defects found.

TABLE V
CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION OF THE ASSEMBLED SHIRTS

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole, scissors or knife cut, tear, mend, burn, or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area	X	
b. Any portion of the shirt stiffened or scorched by any process of manufacturing	X	
c. Any missing or broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the shirt	1/	
SHADED PARTS		
a. Any part shaded or any shade bar		X
b. Color of any component not as specified or not uniform		X
CLEANNESS		
a. Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed		X
b Any unsightly slub, spot, or stain; any discoloration of the cloth caused by the removal of any shade and size marking ticket; any shade and size marking ticket, excluding the metal fastening or sewn-on kind, not removed; any shade and size marking identification stamping visible on the outerside of the shirt; or any shade and size marking adhesive mass adhering to the fabric		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
CLEANNESS (cont'd)		
c. Any metal fastening device or sewn-on shade and size marking ticket attached to the shirt	X	
d. Any marking used for locating the position for attaching of any component visible on the top or underside of the shirt		X
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly, not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c. Any dimension not as specified, not herein classified	1/	
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated, any part of the shirt or of any component caught in an unrelated operation or stitching; any seam edge not properly forced out or contains any fold	X	
2. Ends of stitching that are not caught in other seams or stitching:		
(a) Any not securely backstitched	X	
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (cont'd)		
3. Thread breaks:		
(a) Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X
b. Gage of stitching 2/:		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
c. Open seams 3/:		
1. Other than on the hem:		
(a) Any more than 1/8 inch but not more than 1/4 inch		X
(b) Any more than 1/4 inch	X	
2. On the hem:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
d. Raw edges 4/:		
1. Outerside or innerside of the shirt:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
e. Seam and stitch type:		
1. Not specified seam or stitch	1/	
2. Any looper thread on the outerside of any shirt seam, when Stitch Type 401 is used	X	
f. Stitch tension:		
1. Any loose stitching 5/	1/	
2. Any tight stitching, resulting in breakage of the stitches, when normal pull is applied 6/	X	
g. Stitches per inch 7/:		
1. Stitches more or less than specified:		
(a) Shirt (excluding label):		
(1) One or 2		X
(2) More than 2	X	
(b) Label:		
(1) One to 3		X
(2) More than 3	X	
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE SHIRT		
FACING		
a. Any short, tight, or twisted causing puckering	X	
b. Width of any facing more than 1-1/2 inches or less than one inch		X
SHOULDER SEAM		
a. Back does not overlap the front		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
BOTTOM HEM		
a. Width more than 1-1/4 inches or less than 3/4 inch		X
POCKETS		
a. Any pocket out of horizontal or vertical alignment:		
1. More than 3/8 inch but not more than 1/2 inch		X
2. More than 1/2 inch		
b. Any not of uniform size and shape		X
c. The width of any pocket less than 4 inches or more than 4-1/2 inches		X
d. The length of any pocket less than 4-3/4 inches or more than 5-1/4 inches		X
e. Width of the pocket opening less than 3-1/2 inches		X
f. Any corner not tacked		X
LABELS		
a. Identification:		
1. Size missing, incorrect, or illegible or color of any label not as specified	X	
2. Other than the size information, incomplete, incorrect, or illegible		X
3. Misplaced, off center of the back by more than 1/2 inch		X
4. Stitching omitted on one or more edges		X
5. When applicable, any evidence of separation of any heat attached label		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ The gage of stitching defect shall be scored only when the condition exists for more than 2 inches on any row of stitching.

3/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stiched seams, a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

4/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified and scored, as raw edge. Any raw edge, that is not securely caught in the stitching, shall be classified and scored as an open seam.

5/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

6/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as an accuracy of seaming defect.

7/ The stitches per inch shall be scored only when the condition exists for more than 3 inches on any row of stitching.

TABLE VI
LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED SHIRTS

ASSEMBLED MEASUREMENT	DEFECT
Measure the chest, front and back length and bottom width.	Any measurement deviating from the measurements specified in 3.4 and Table II and applicable tolerance shall be enumerated as a dimensional defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

4.3.3.2 Preparation for delivery. Each of the fully prepared shipping containers, containing shirts of one size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table VIII, shall be used to enumerate the defects.

TABLE VII
LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; improper size, location, sequence, or method of application not as specified; size shown on any exterior container or on the label of the shirt not the same.
Materials	Any non-conforming component; any component or component part missing, damage, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of any exterior container, container flap, or loose strapping; bulging or distortion of any container; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam.
Exterior and interior weight or content	Gross or net weight exceeds the requirement; number per container more or less than specified; more than one size shirt in the same container; any portion of the shirt caught in any heat sealed seam; any shirt distorted, deformed, or bent; any not individually packaged within the polyethylene bag.

4.3.4 Procedure for measuring. The shirt to be measured shall be laid flat, without tension, on a smooth, flat surface so that any wrinkles or creases shall not affect the measurement. The measurements shall be made with the use of a yard stick, metal tape, or by use of any suitable measuring device. The measurements shall be made as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

a. The chest dimension shall be taken at the base of the armholes from side folded edge to side folded edge.

b. The back length dimension shall be taken from the top edge of the neck at the center of the back to the bottom of the shirt.

c. The front length dimension shall be taken from the top edge of the neck opening at the center of the front to the bottom of the shirt.

d. The bottom width dimension shall be taken along the bottom edge from side folded edge to side folded edge.

4.3.5 Color matching. The color of the labels shall be compared to the crepe side of the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. Each shirt of size specified constitutes one unit of issue

5.1.2 Level A. Each shirt shall be laid front down, the side folded in over the back and the bottom brought up to the shoulders to an approximate dimension of 15-1/2 by 10 inches. The size label shall be clearly visible in front so as to permit identification. Each folded shirt shall be inserted into a snug-fitting polyethylene bag. The bag shall be flat style, made of clear polyethylene film of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.3 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. One hundred shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped liner conforming to grade V3c of PPP-C-636. Level A packages shall be packed flat, two in length, one in width and fifty in depth within a shipping container. Inside dimensions of each container shall approximate 20 inches in length, 15-1/2 inches in width and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container specification. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B. One hundred shirts of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, variety, SW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed, two in length, one in width and fifty in depth within a shipping container. Inside dimensions of each container shall approximate 20 inches in length, 15-1/2 inches in width and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II, as specified, in the appendix of the container specification. Toward the end of the contract, or when there are less than the required amount per container in the same size, mixed sizes may be packed within the same containers.

5.2.3 Level C. Shirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag information shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
QUANTITY
STYLE
SIZE

6. NOTES

6.1 Intended use. The Style A, sleeveless, cotton, man's, surgical, operating shirts covered by this specification are intended for wear by the male surgical personnel of the Medical Services.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.
b. Size and quantity desired (see 1.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Supersession data. The Style A, sleeveless, cotton, man's, surgical operating shirts covered by this specification supersedes the Item No. 1, Style A shirts covered by MIL-S-36175A and Specification Data Sheet No. 16 for 6532-00-299-9627, 9632, 9633, and 9634. The shirts are used in conjunction with the trousers, operating, surgical, man's, cotton, green conforming to MIL-T-37131.

6.4 Patterns. The patterns for the shirts will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.3.1). The pattern parts shall consist of the following:

NOMENCLATURE	CUT PARTS
Front	One
Back	One
Front armhole facing	Two
Back armhole facing	Two
Front neck facing	One
Back neck facing	One
Patch pocket	One

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

6.5 Catalog Information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-299-9627	SHIRT, OPERATING, SURGICAL, Man's, Cotton, Sleeveless, Style A, Small, Green, Each
6532-00-299-9632	SHIRT, OPERATING, SURGICAL, Man's, Cotton, Sleeveless, Style A, Extra Large, Green, Each
6532-00-299-9633	SHIRT, OPERATING, SURGICAL, Man's, Cotton, Sleeveless, Style A, Large, Green, Each
6532-00-299-9634	SHIRT, OPERATING, SURGICAL, Man's, Cotton, Sleeveless, Style A, Medium, Green, Each

6.6 Commercial information. This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the items, which are normally procured to meet military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM


Project No. 6532-1089

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

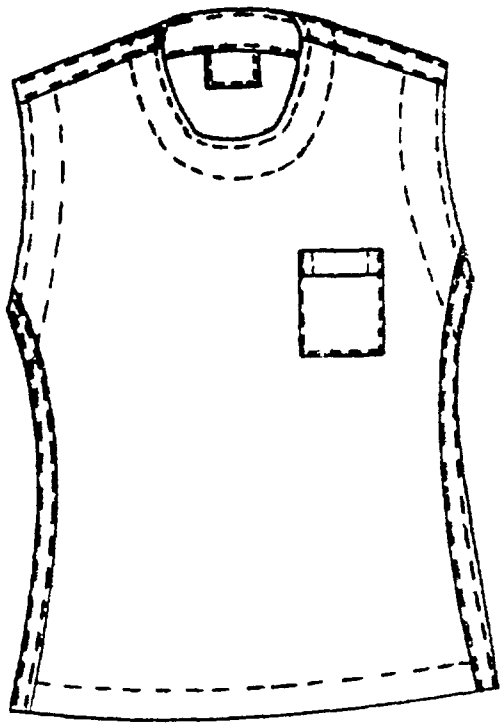

FRONT

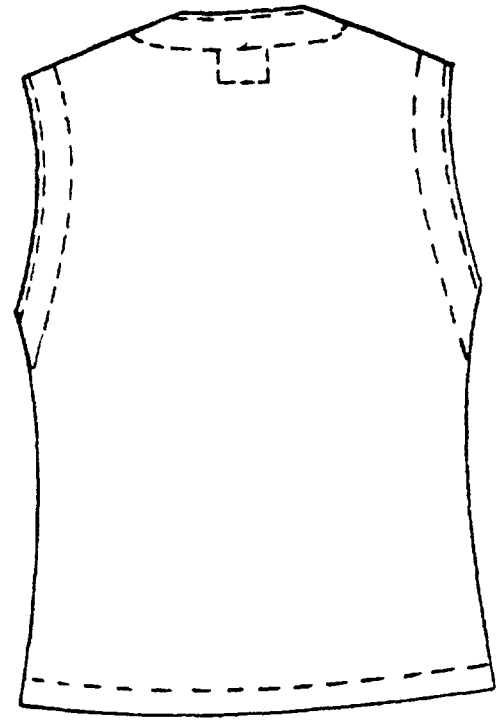

BACK

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE MIL-S-37129

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:01Z
Check the source to verify that this is the current version before use.