METRIC

MIL-T-24649/10(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED
IC/A1, SWITCHBOARD

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-24649

REQUIREMENTS

Random drop (see 3.3 3)	not required
Salt fog (see 3.3.5)	not required
Dripproof (see 3.3.6)	not required
Splashproof (see 3.3.7)	not required
Watertight (see 3 3.8)	not required


Construction.

1. All dimensions unless otherwise specified are in mm. Tolerances, unless otherwise specified shall be plus or minus 0.127 mm.
2. All sharp edges or corners exposed to touch shall be slightly rounded.
3. Space shall be provided inside the enclosure so that ships wiring will not be crushed or distorted when the enclosure is mounted and assembled.
4. Screw threads for all threaded securing devices shall conform to FED-STD-H28. The thread shall be right handed, of the course thread series.
5. Threads in aluminum alloys shall not be used. Through bolts shall be used whenever practical. Inserts shall be provided where screws or bolts must be removed for maintenance.
6. Threads shall not be employed in plastic parts without the use of suitable threaded metallic inserts.
7. No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).
8 All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly

Preparing activity:
Navy - SH
(Project 5935-N457-10)

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:39Z
Check the source to verify that this is the currentversion before use.

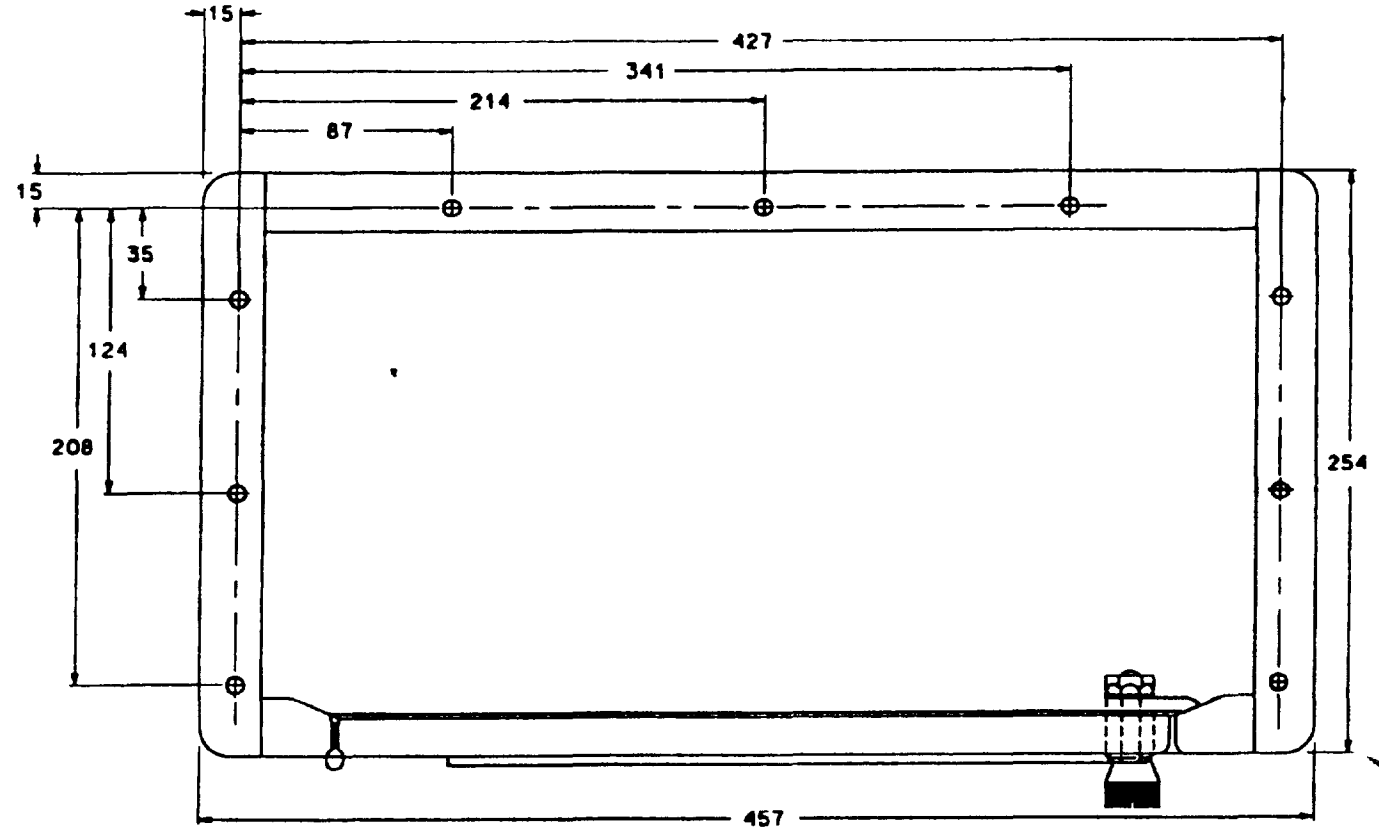

TOP AND BOTTOM OF PANEL ASSEMBLY WILL REQUIRE IDENTICAL FLANGES AND PENETRATIONS TO PERMIT STACKING OF UNITS OR INSTALLATION OF TOP AND BASE UNITS

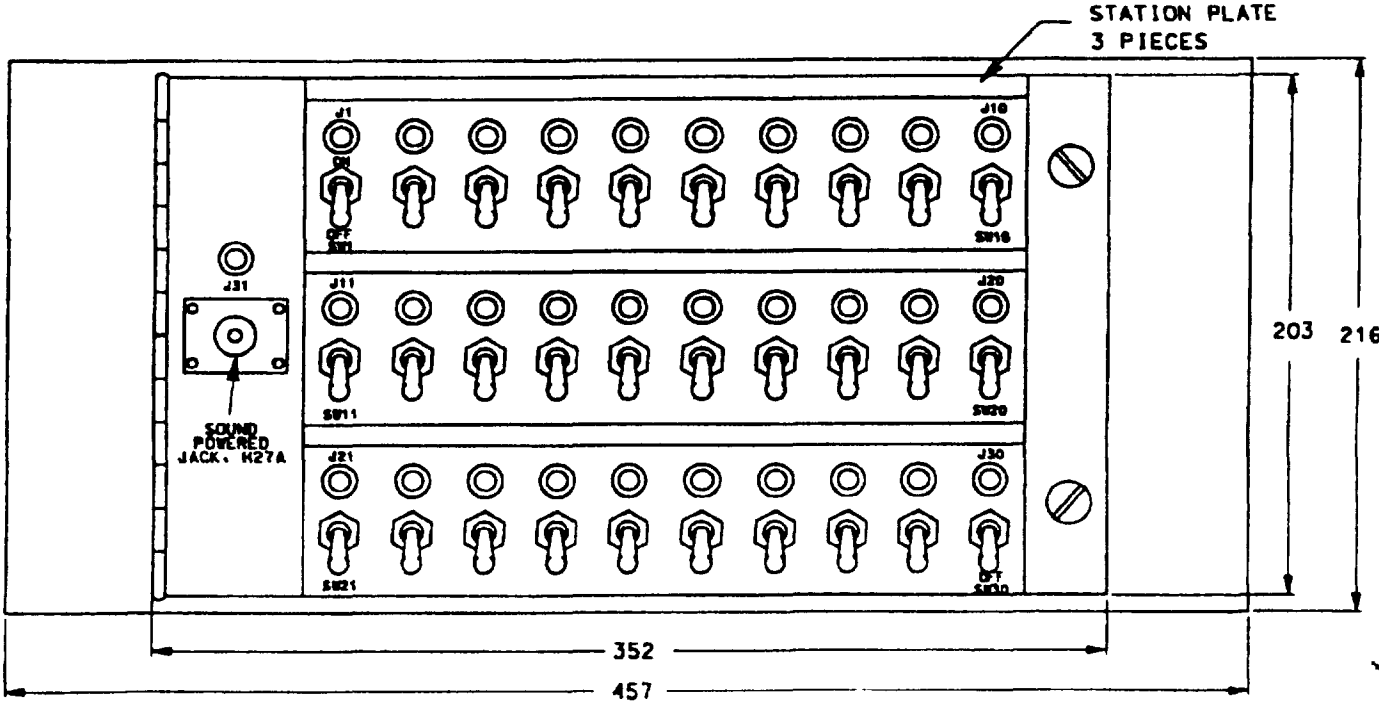


FIGURE 1. Panel assembly, top and bottom

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:39Z
Check the source to verify that this is the current version before use.

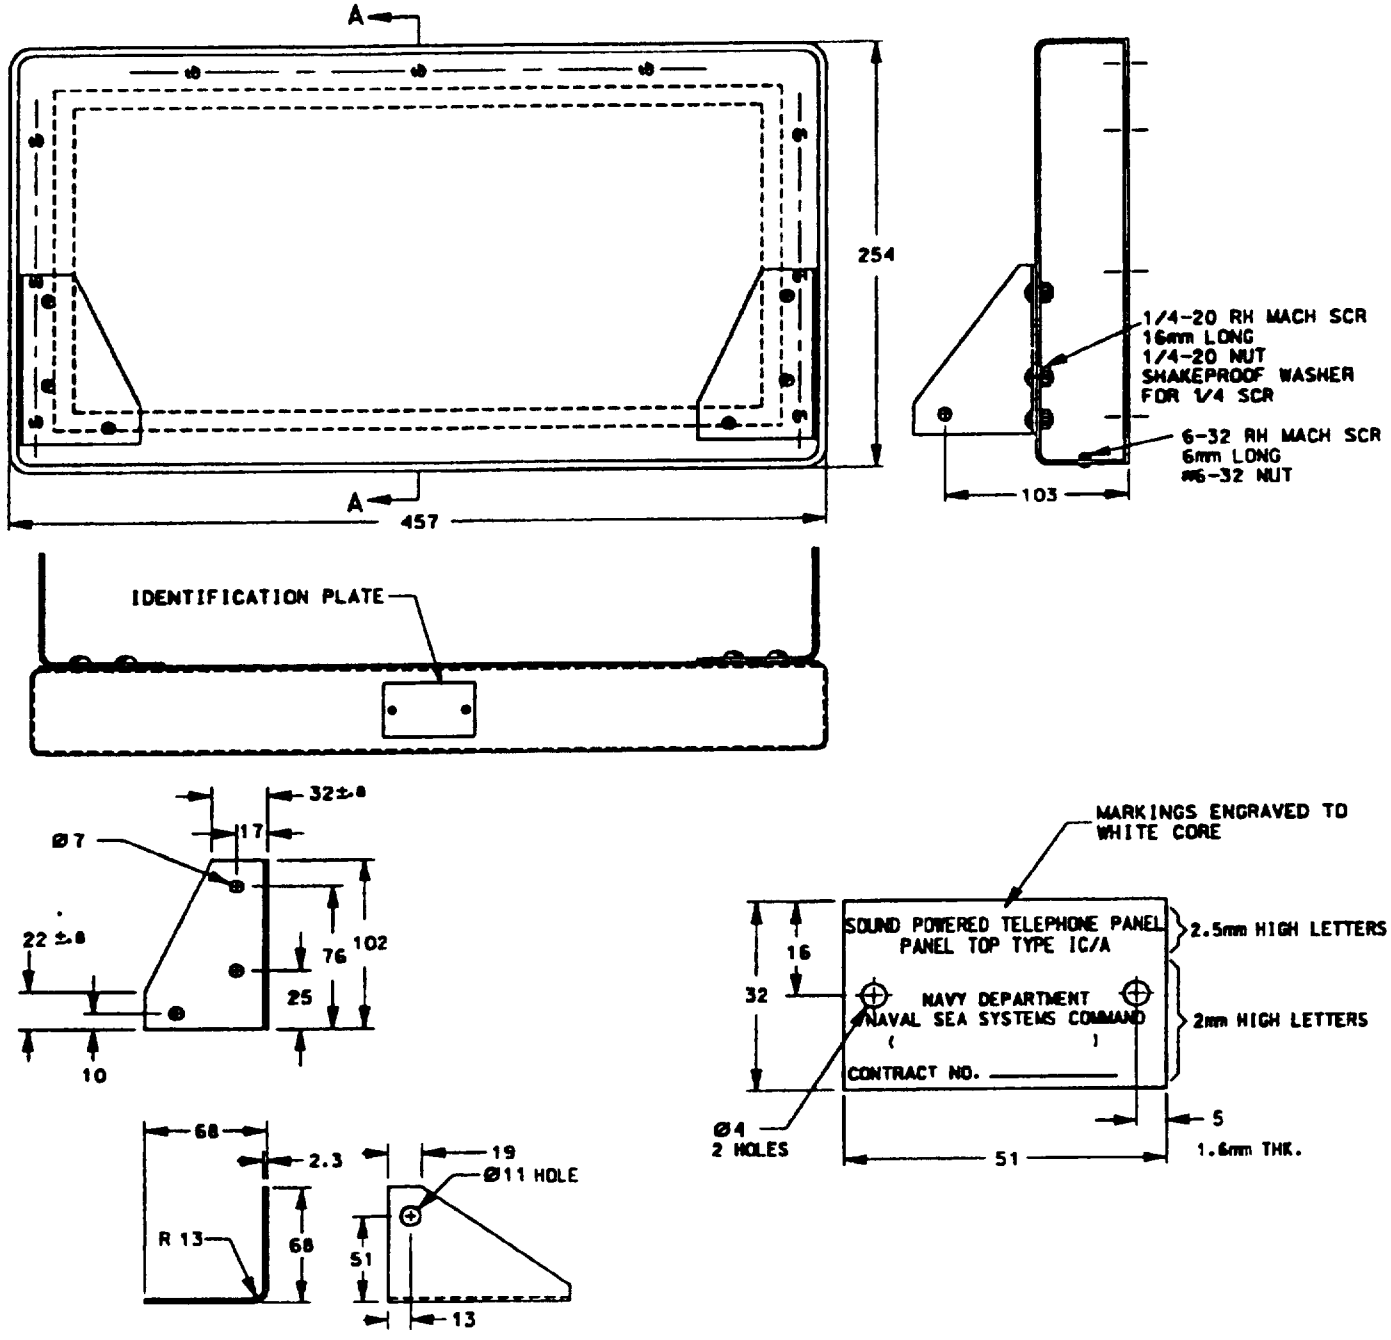


FIGURE 2. Top assembly

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:39Z
Check the source to verify that this is the current version before use.

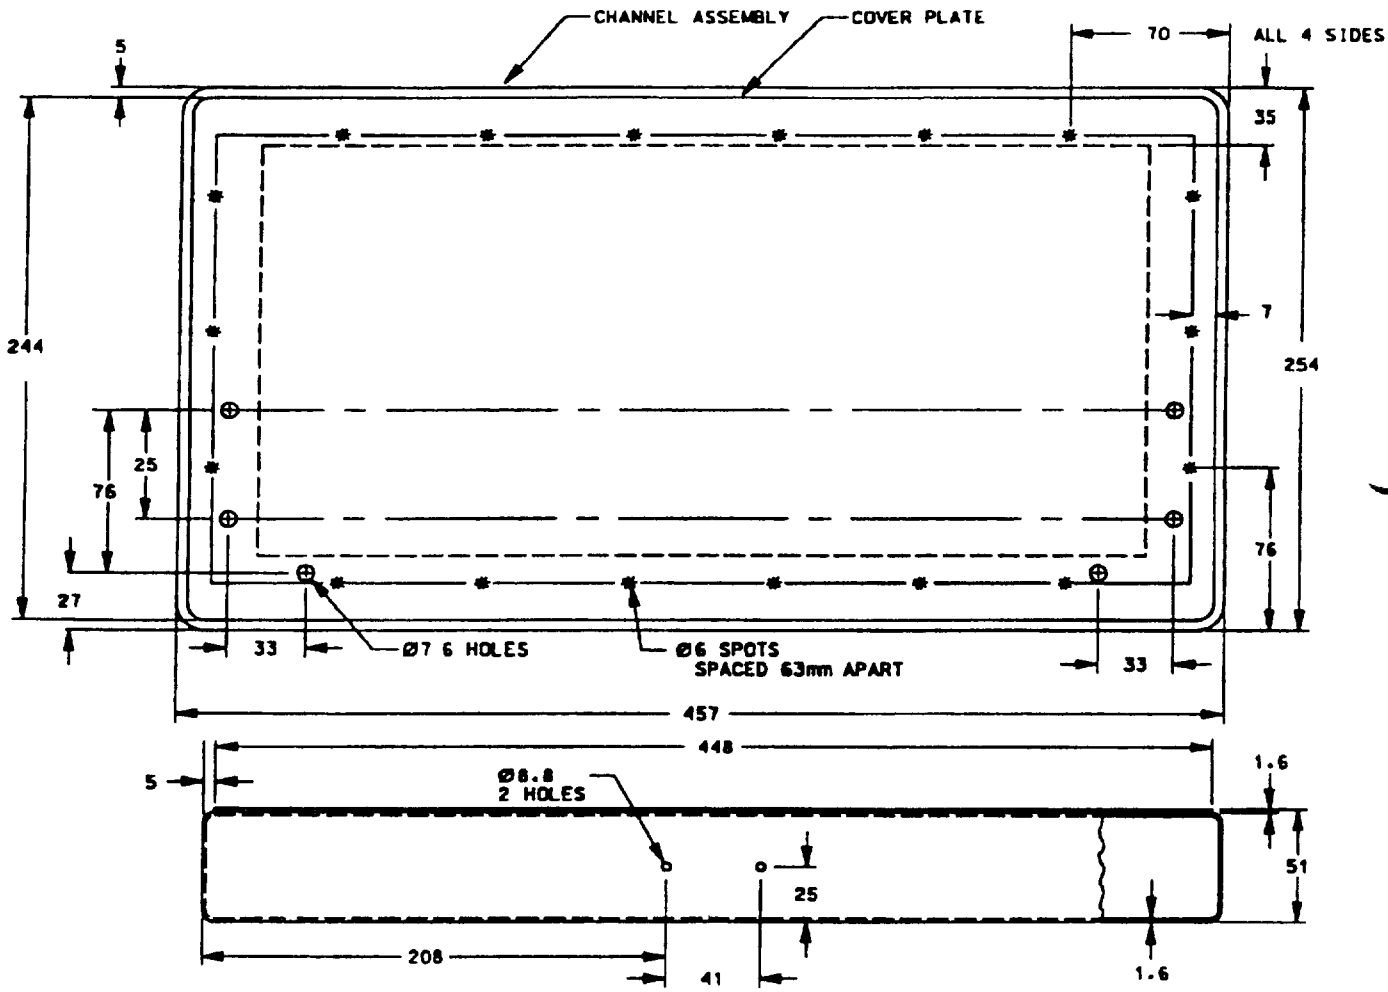


FIGURE 3 Top assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

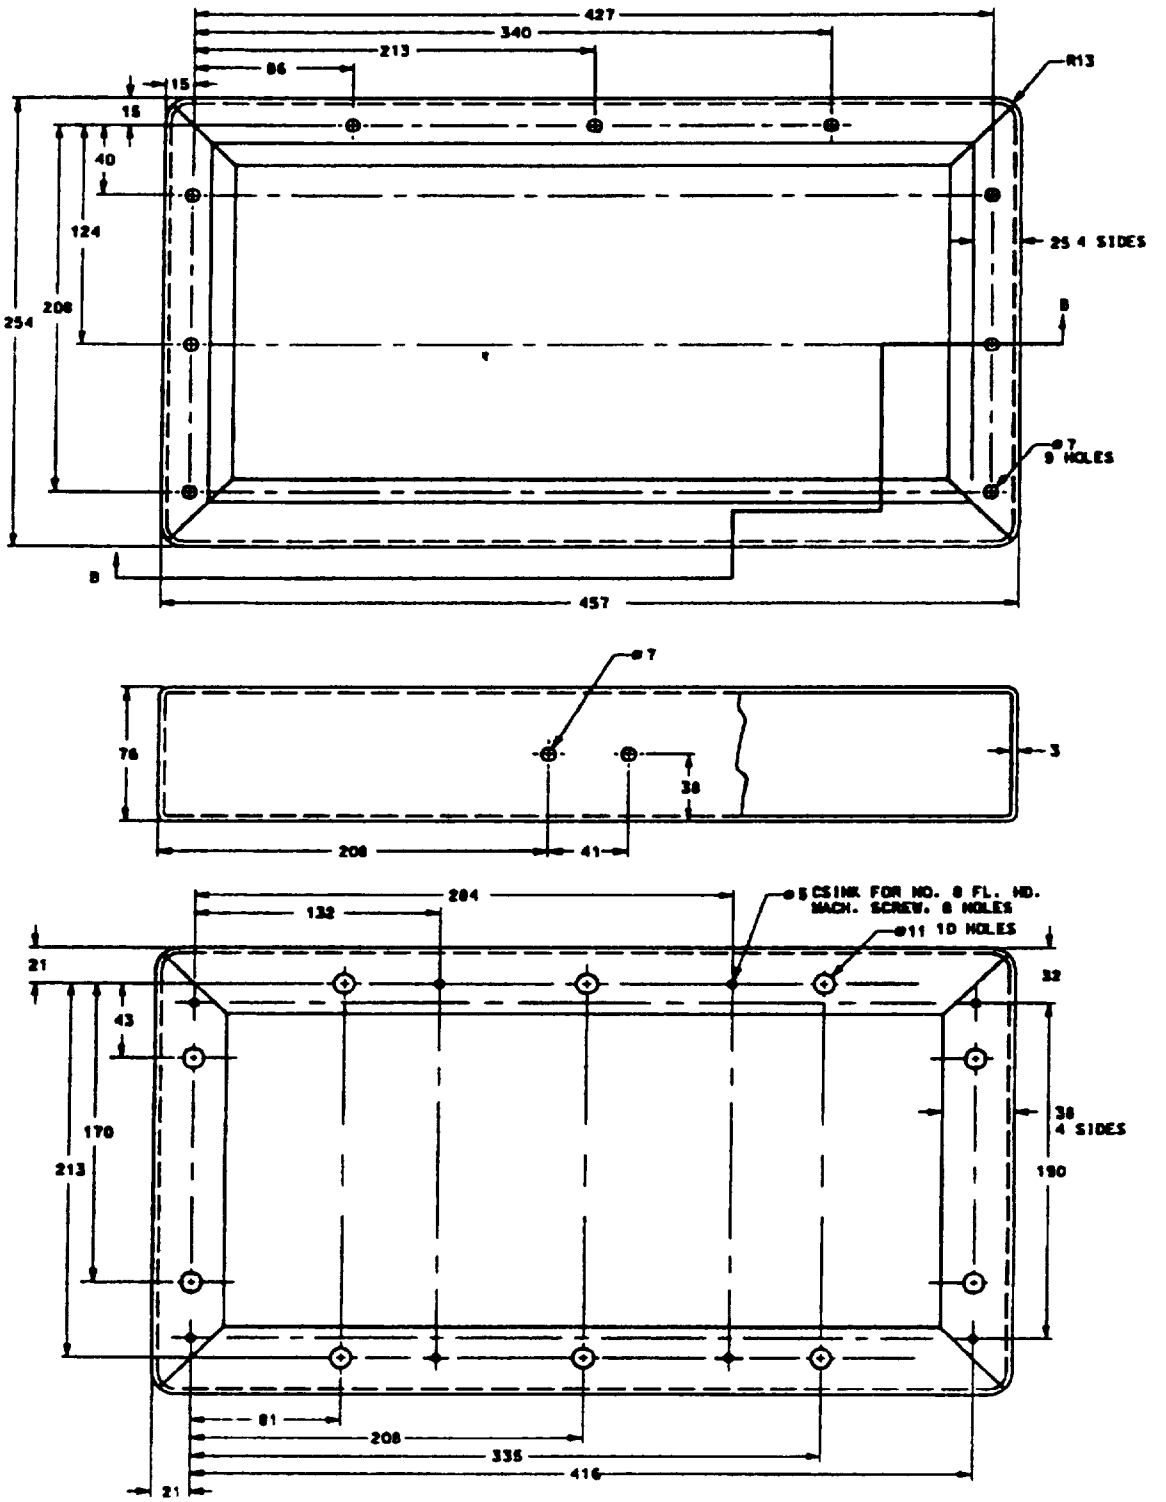


FIGURE 4. Bottom assembly

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:39Z
Check the source to verify that this is the current version before use.

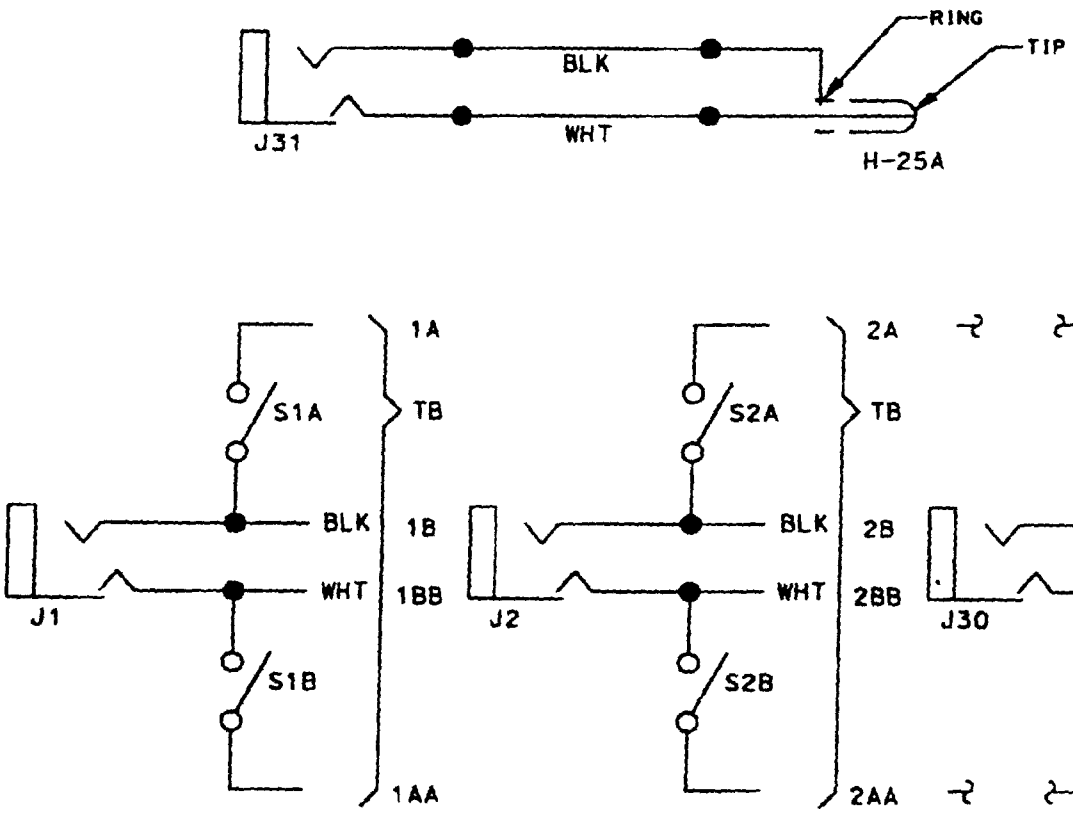


FIGURE 5 Typical wiring diagram

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:39Z
Check the source to verify that this is the current version before use.