METRIC

MIL-T-24649/13(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED CABINET, HANDSET

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-24649

REQUIREMENTS:

Dripproof (see 3.3.6)	not required
Splashproof (see 3.3.7)	not required
Insulation resistance (see 3 3.9)	not required
Talk demonstration (see 3.3.10)	not required
Identification plate (see 3.4.3)	not required
Information plate (see 3 4 4)	not required
Switches (see 3.4 6)	not required

Construction.

1. All dimensions unless otherwise specified are in mm. Tolerances, unless otherwise specified shall be plus or minus .127 mm.
2. All sharp edges or corners exposed to touch shall be slightly rounded.
3. Enclosures with a wall thickness equal to or greater than 4.775 mm shall be provided with a cable entrance plate on the bottom of the enclosure
4 Cable entrance plates shall preserve the degree of enclosure specified.
5. Space shall be provided inside the enclosure so that ships wiring will not be crushed or distorted when the enclosure is mounted and assembled.
6. Screw threads for all threaded securing devices shall conform to FED-STD-H28. The thread shall be right handed, of the course thread series.
7 Threads in aluminum alloys shall not be used. Through bolts shall be used whenever practical. Inserts shall be provided where screws or bolts must be removed for maintenance.
8. Threads shall not be employed in plastic parts without the use of suitable threaded metallic inserts.
9. Castings, if applicable, shall be free of cold shots, blow holes or any other imperfections that may affect strength in any way. All surfaces of castings shall have all fins and burrs removed. Sand surfaces shall be disturbed as little as possible.
10 Flash shall be removed and the width of the flash edges made thereby shall be no greater than 7 874 mm Flash edges shall then be buffed smooth.


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

11 No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).

12. All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly.

Preparing activity
Navy - SH
(Project 5935-N457-13)

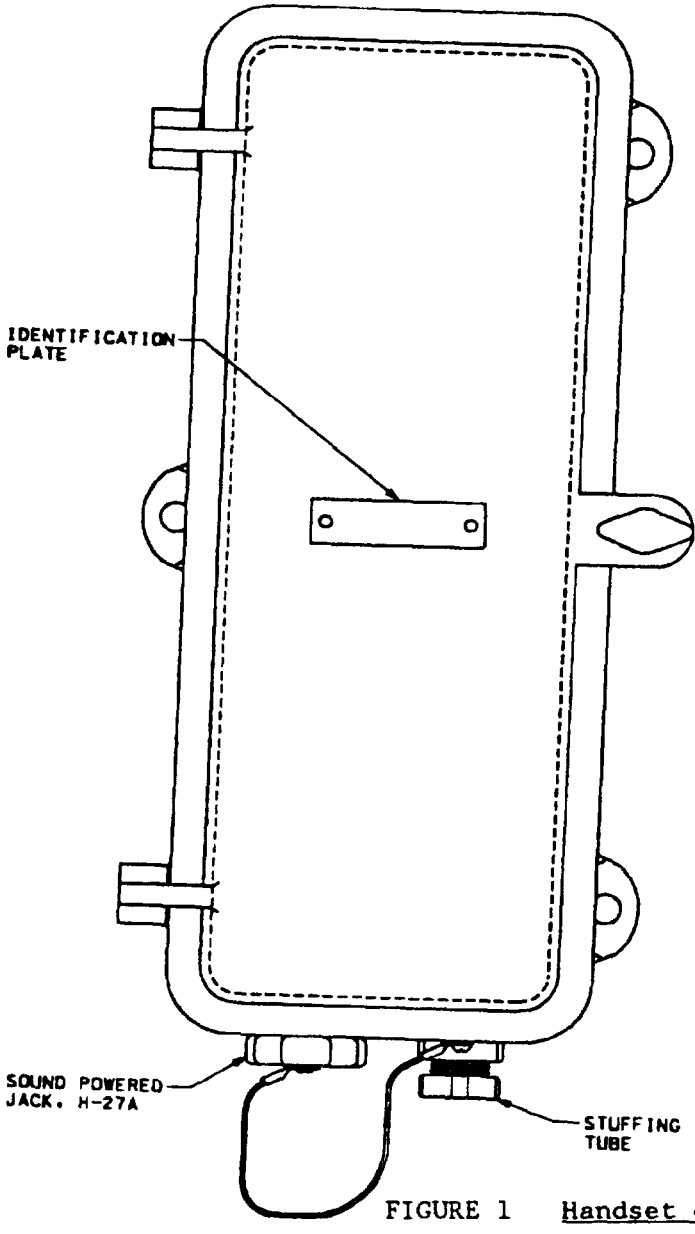

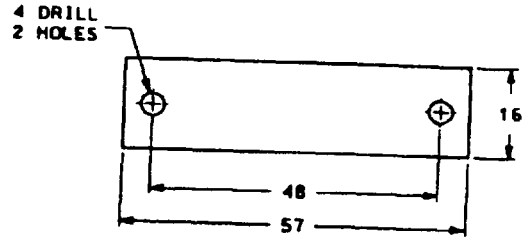

IDENTIFICATION PLATE

FIGURE 1 Handset cabinet, front view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

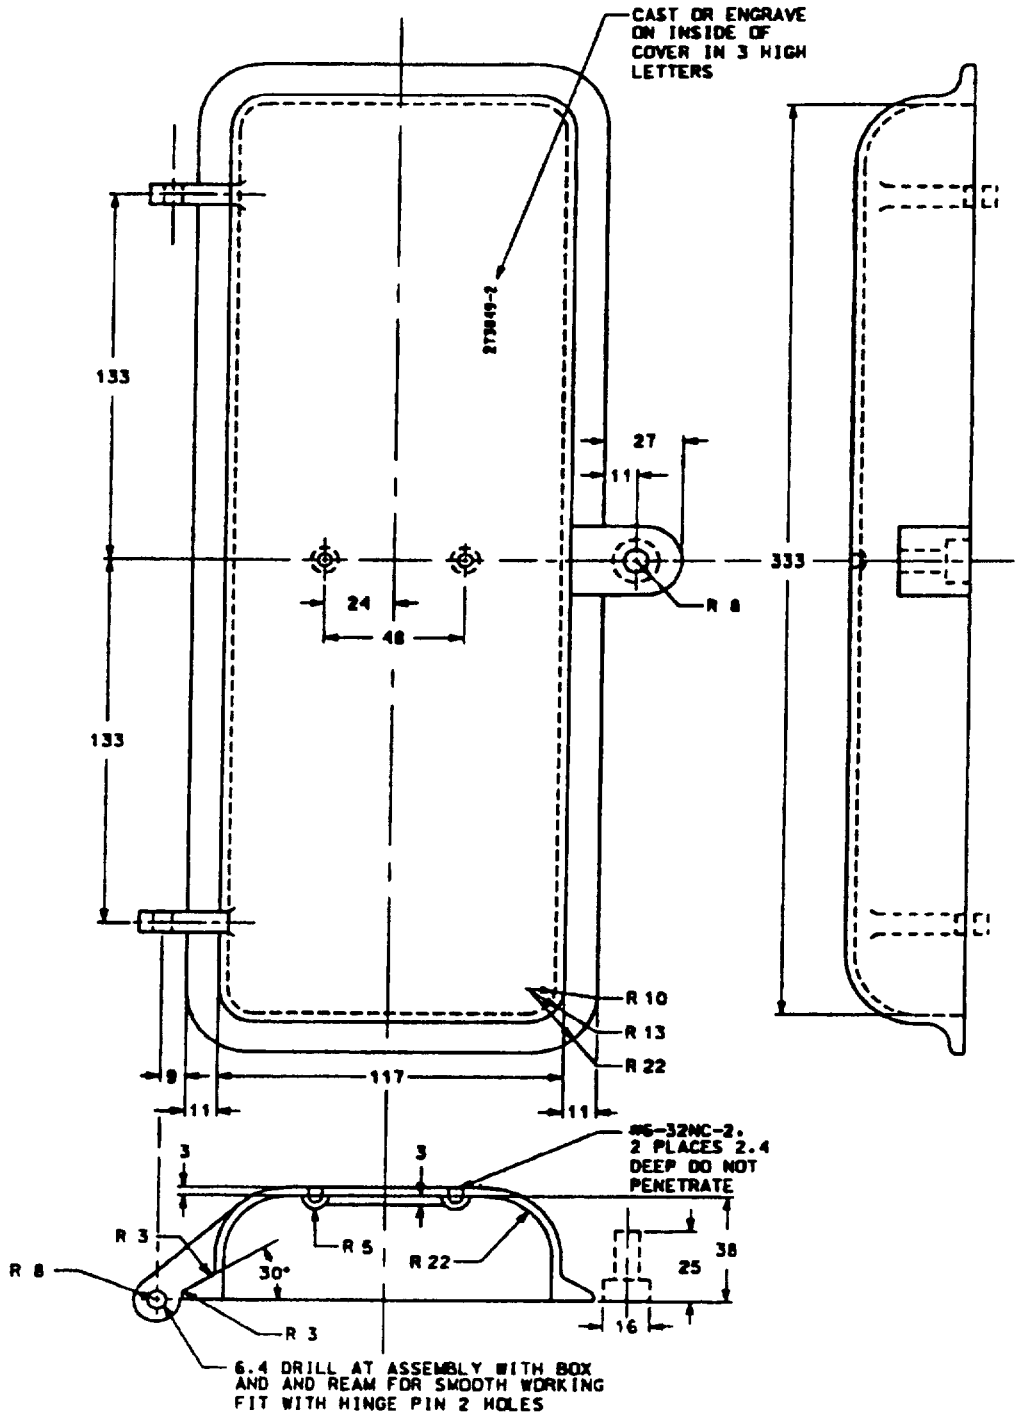


FIGURE 2 Cover

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

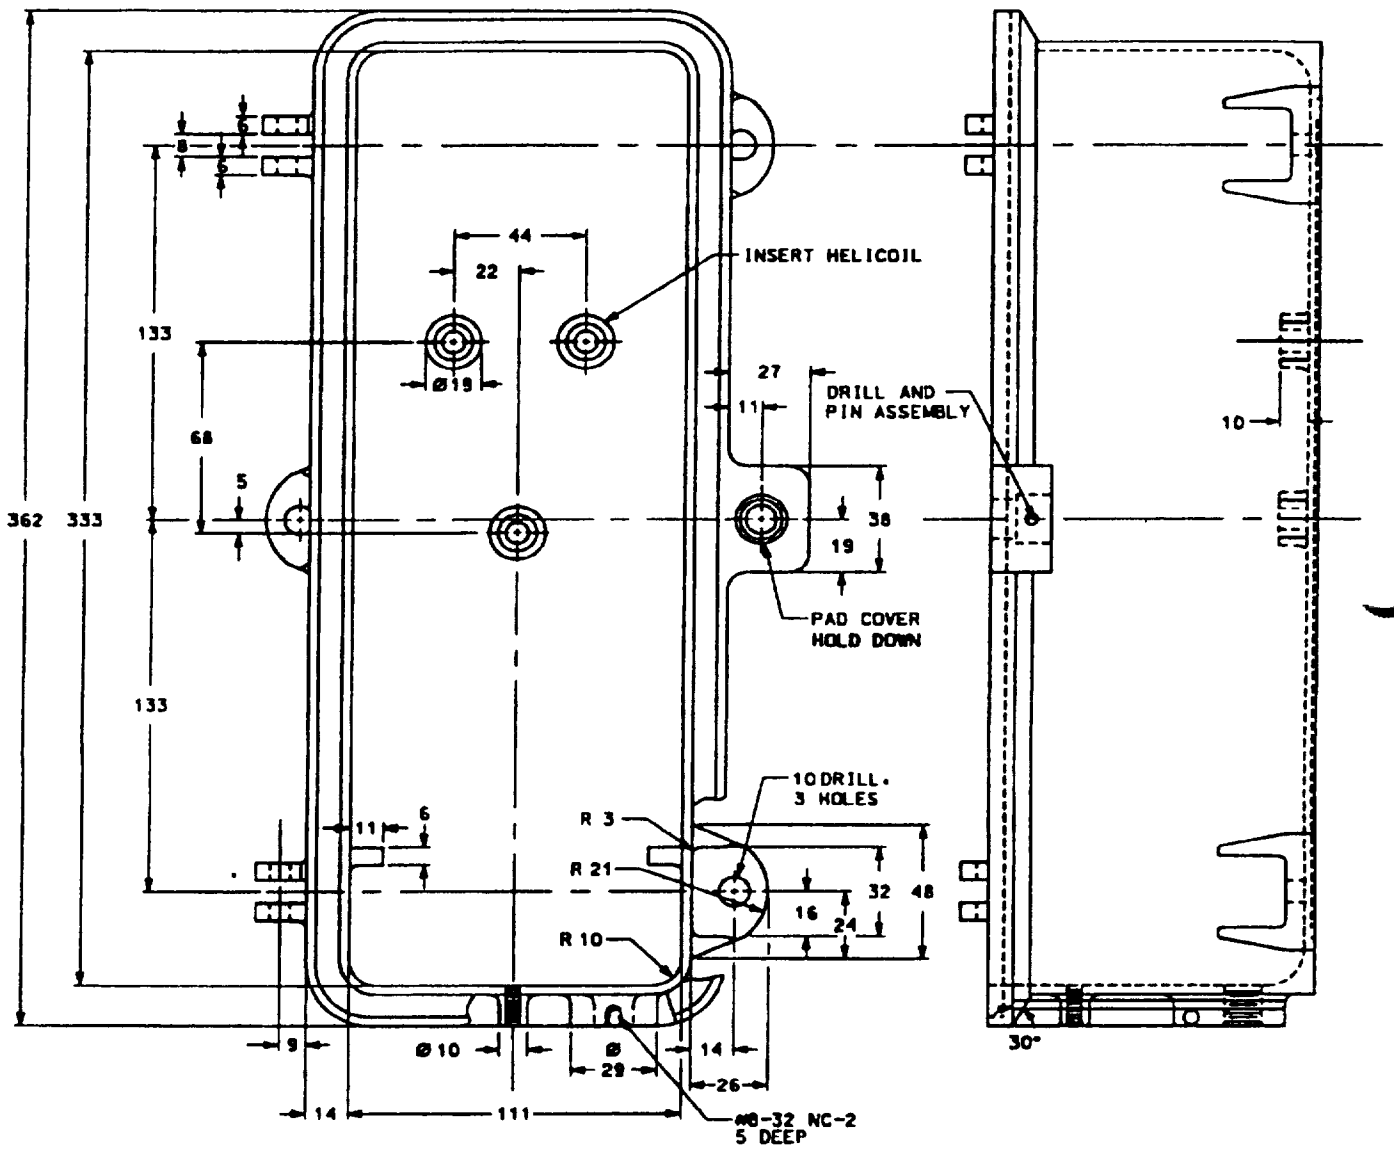


FIGURE 3 Box

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

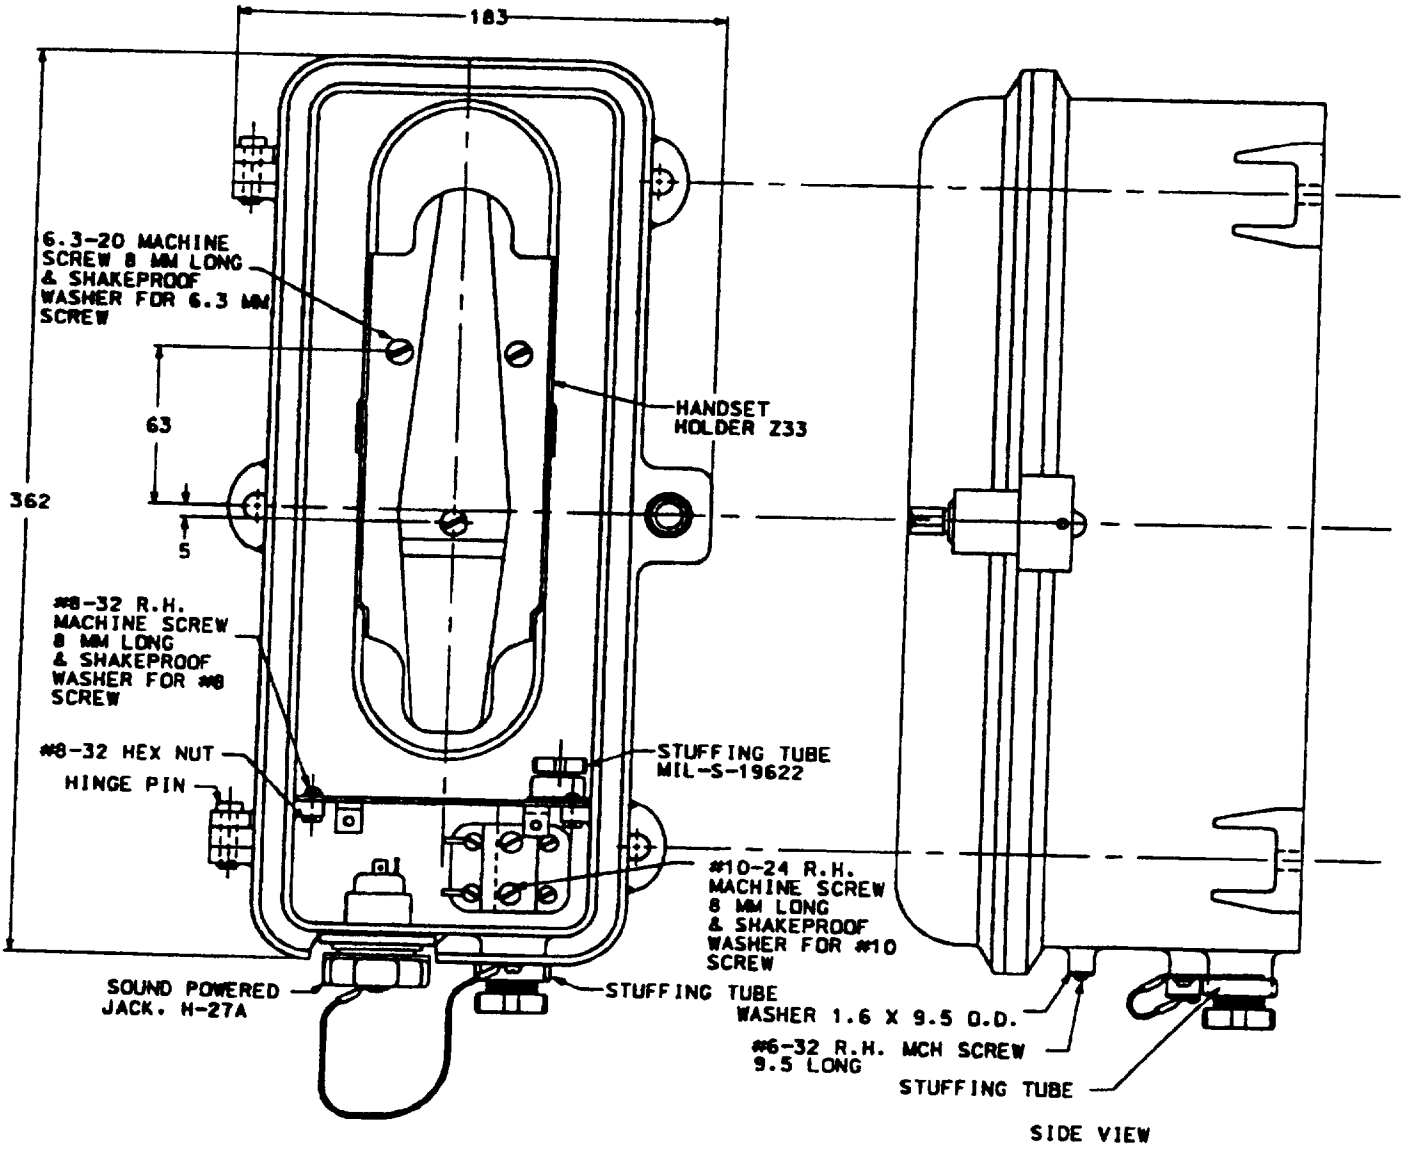


FIGURE 4 Cabinet, inside view, cover removed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

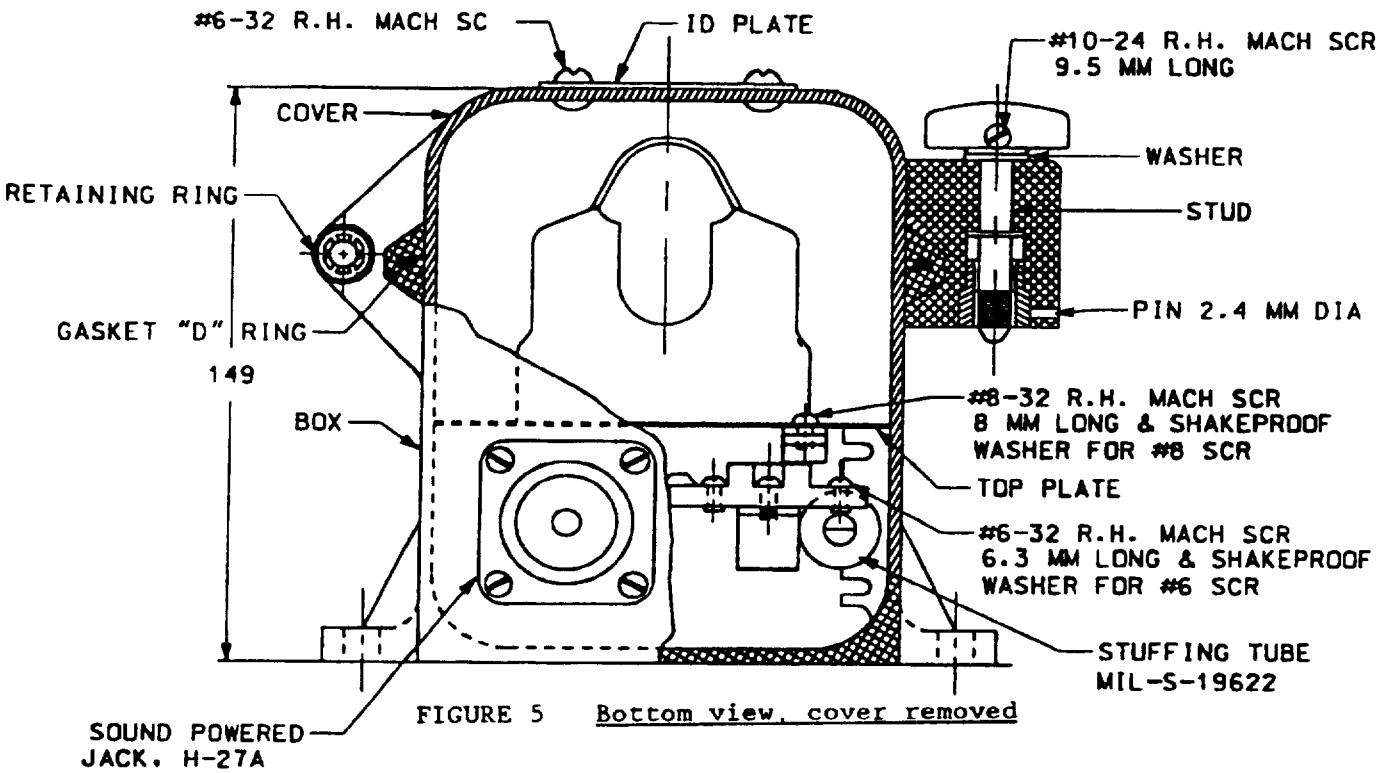


FIGURE 5 Bottom view, cover removed



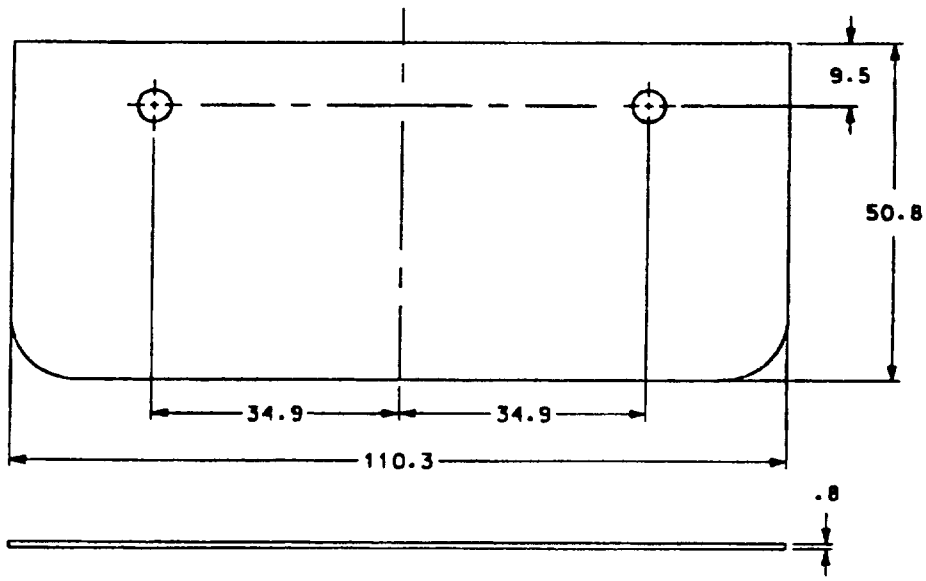


FIGURE 6 Top plate


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

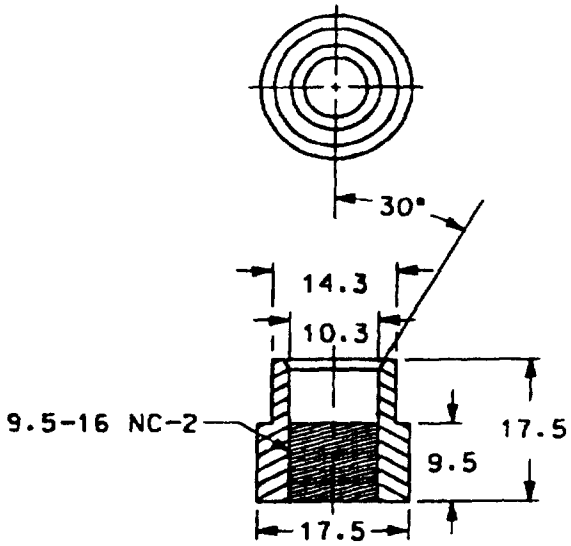


PAD COVER. HOLD-DOWN

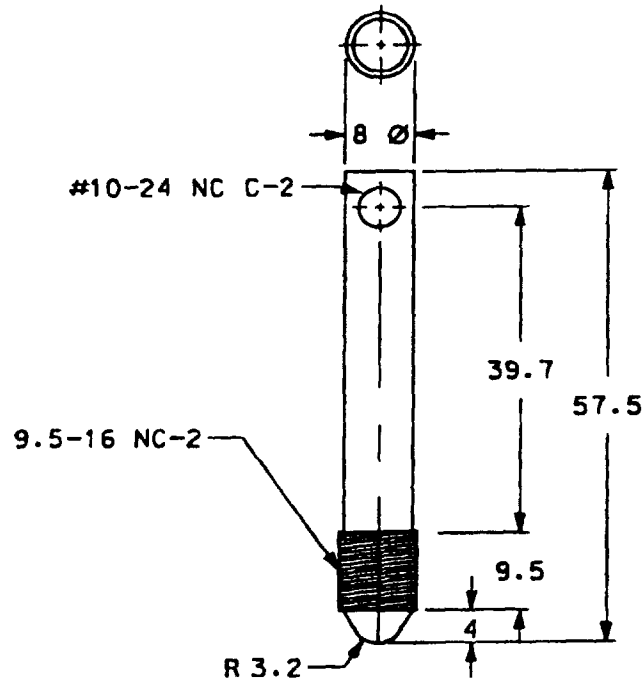

STUD

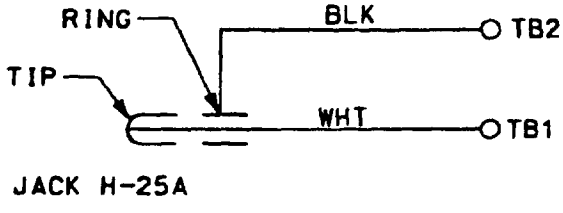

WIRING DIAGRAM

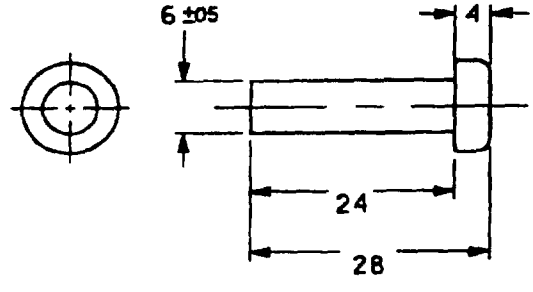

HINGE PIN

FIGURE 7 Details

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.