METRIC

MIL-T-24649/14(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED TELEPHONE/DISTANCE LINE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-24649

REQUIREMENTS:

Shock (see 3.3.1)	not required
Vibration (see 3.3.2)	not required
Random drop (see 3.3.3)	not required
Temperature (see 3.3 4)	not required
Salt fog (see 3.3.5)	not required
Dripproof (see 3.3.6)	not required
Splashproof (see 3.3.7)	not required
Watertight (see 3.3.9)	not required
Identification plate (see 3.4.3)	not required
Information plate (see 3 4.4)	not required
Switches (see 3.4.6)	not required
Terminal boards (see 3.4.7)	not required

Construction.

1 All dimensions unless otherwise specified are in mm.
2. No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).
3. Ensure that any lashing around or through the telephone/distance line does not jeopardize the electrical integrity of the conductors within the line.
4. Apply numerals to both sides of the distance marker.
5. Attach flt, one cell (light) according to type of vessel. Red light to be attached to the leading edge of each of the telephone/distance line markers except for green to be attached to the leading edge of the 18 and 30 meter distance markers for DD or smaller vessels, 24 and 30 meter distance markers for larger vessels, and 30 and 43 meter distance markers for carriers or LSTs.
6 For green lens on flt, one cell apply green enamel or green dye to inside of lens so that it will appear green when viewed from the outside. Care must be taken so that the coating is not so thick as to completely obscure the light from the lamp
7 The core of the line shall be sealed with insulating compound prior to being placed in the stuffing tube.


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.


8. Color of distance markers and location of markers shall be as follows:

Marker	Number	Distance
Green	Yellow	0, 30, 61, 91, 122
Red	White	6, 37, 67, 98, 128
Yellow	Green	12, 43, 73, 104
Blue	White	18, 49, 79, 110
White	Blue	24, 55, 85, 116

Preparing activity:
Navy - SH
(Project 5935-N457-14)

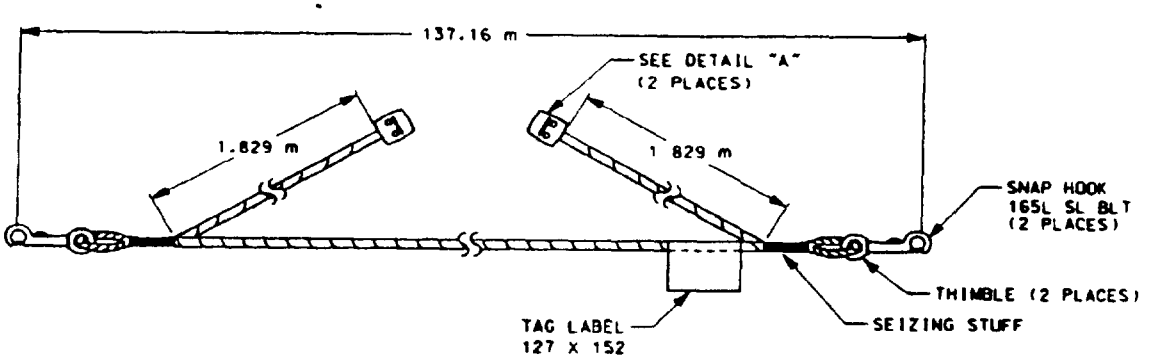

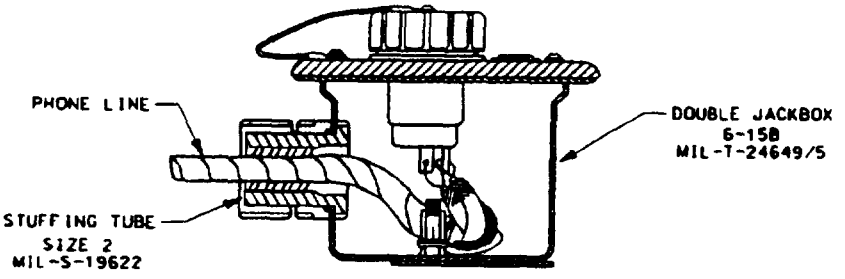

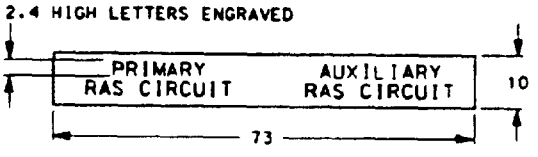

DETAIL "A"

FIGURE 1 Station-to-station phone line

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

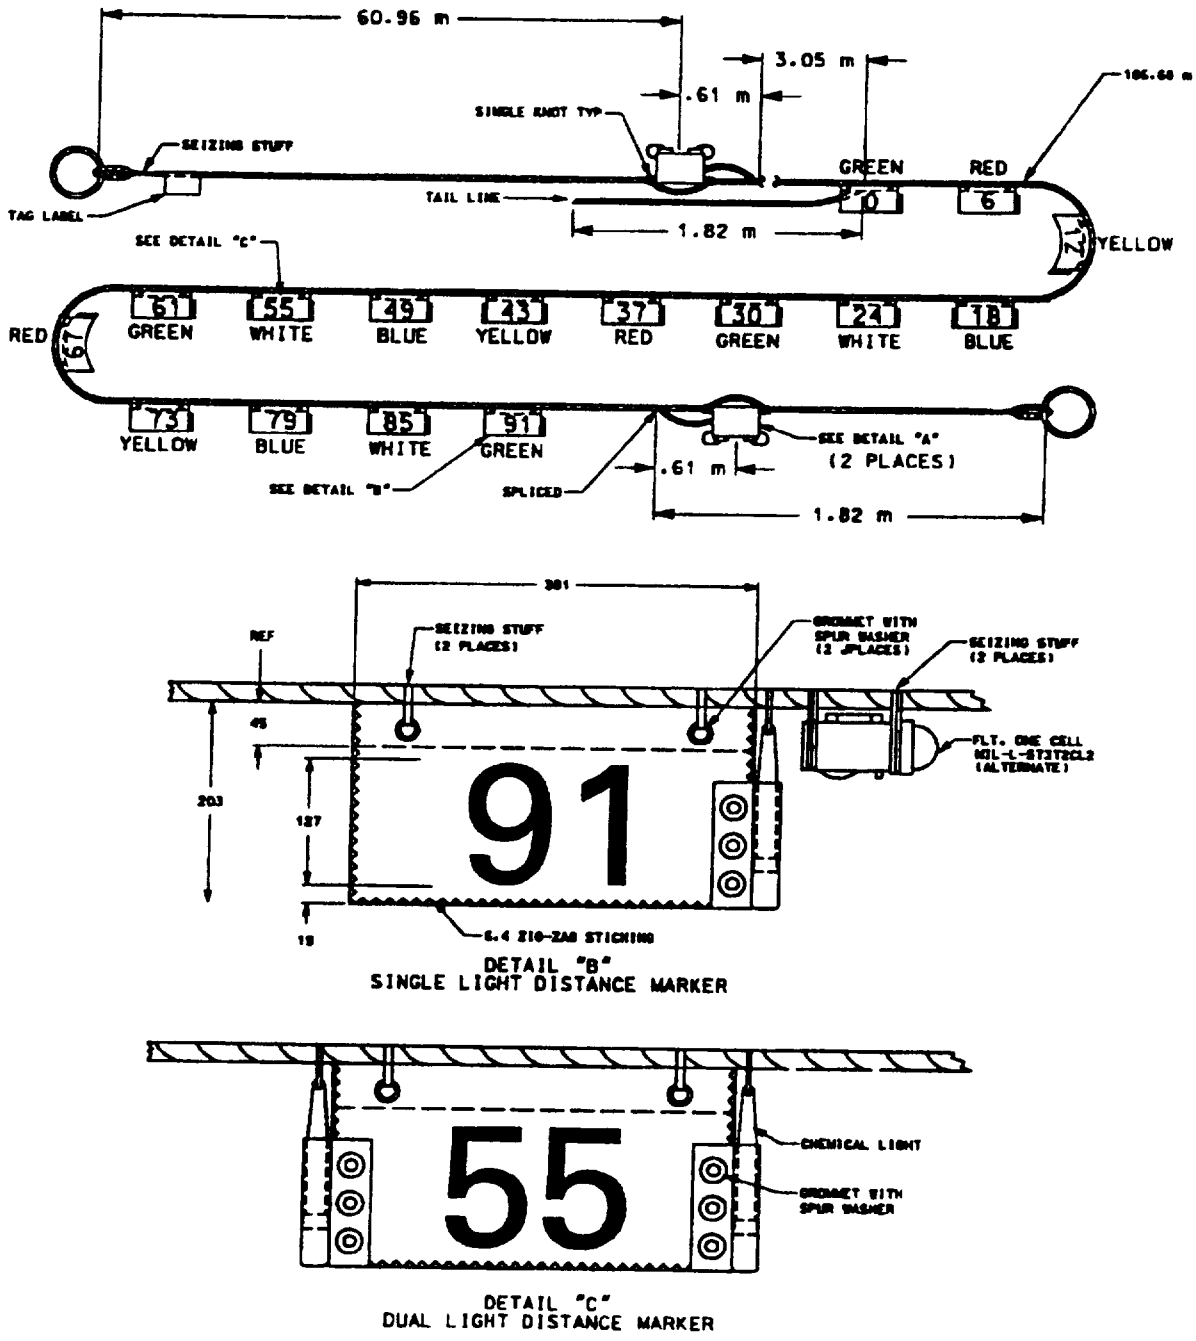


FIGURE 2 Bridge-to-bridge and distance line

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.