METRIC

MIL-T-24649/16(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED SOUND POWERED JACK, PORTABLE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-24649

REQUIREMENTS:

Dripproof (see 3.3.6)	not required
Splashproof (see 3.3.7)	not required
Insulation resistance (see 3.3.9)	not required
Talk demonstration (see 3.3.10)	not required
Identification plate (see 3.4.3)	not required
Information plate (see 3 4.4)	not required
Station plate (see 3.4.5)	not required
Switches (see 3.4.6)	not required
Terminal boards (see 3.4.7)	not required
Wiring (see 3.4.8)	not required
Wire terminals (see 3.4.9)	not required

Construction.

1. All dimensions unless otherwise specified are in mm. Tolerances, unless otherwise specified shall be plus or minus 127 mm.
2. All sharp edges or corners exposed to touch shall be slightly rounded
3. Screw threads for all threaded securing devices shall conform to FED-STD-H28. The thread shall be right handed, of the course thread series.
4. Threads in aluminum alloys shall not be used. Through bolts shall be used whenever practical. Inserts shall be provided where screws or bolts must be removed for maintenance.
5. Threads shall not be employed in plastic parts without the use of suitable threaded metallic inserts.
6 Castings, if applicable, shall be free of cold shots, blow holes, or any other imperfections that may affect strength in any way. All surfaces of castings shall have all fins and burrs removed. Sand surfaces shall be disturbed as little as possible.
7. Flash shall be removed and the width of the flash edges made thereby shall be no greater than .787 mm. Flash edges shall then be buffed smooth
8 No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

9. All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly
10. Two each of the grommet, washer, and nut shall be furnished with each portable jack assembly. The hole diameter shall be as follows:


(a) Grommet:
1. 7.976 ± .076
2. 4.826 ± .076

(b) Washer:
1. 8.331 ± .076
2. 5.156 ± .076

(c) Nut:
1. 8.331 ± .076
2. 5.156 ± .076

Preparing activity:
Navy - SH
(Project 5935-N457-16)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

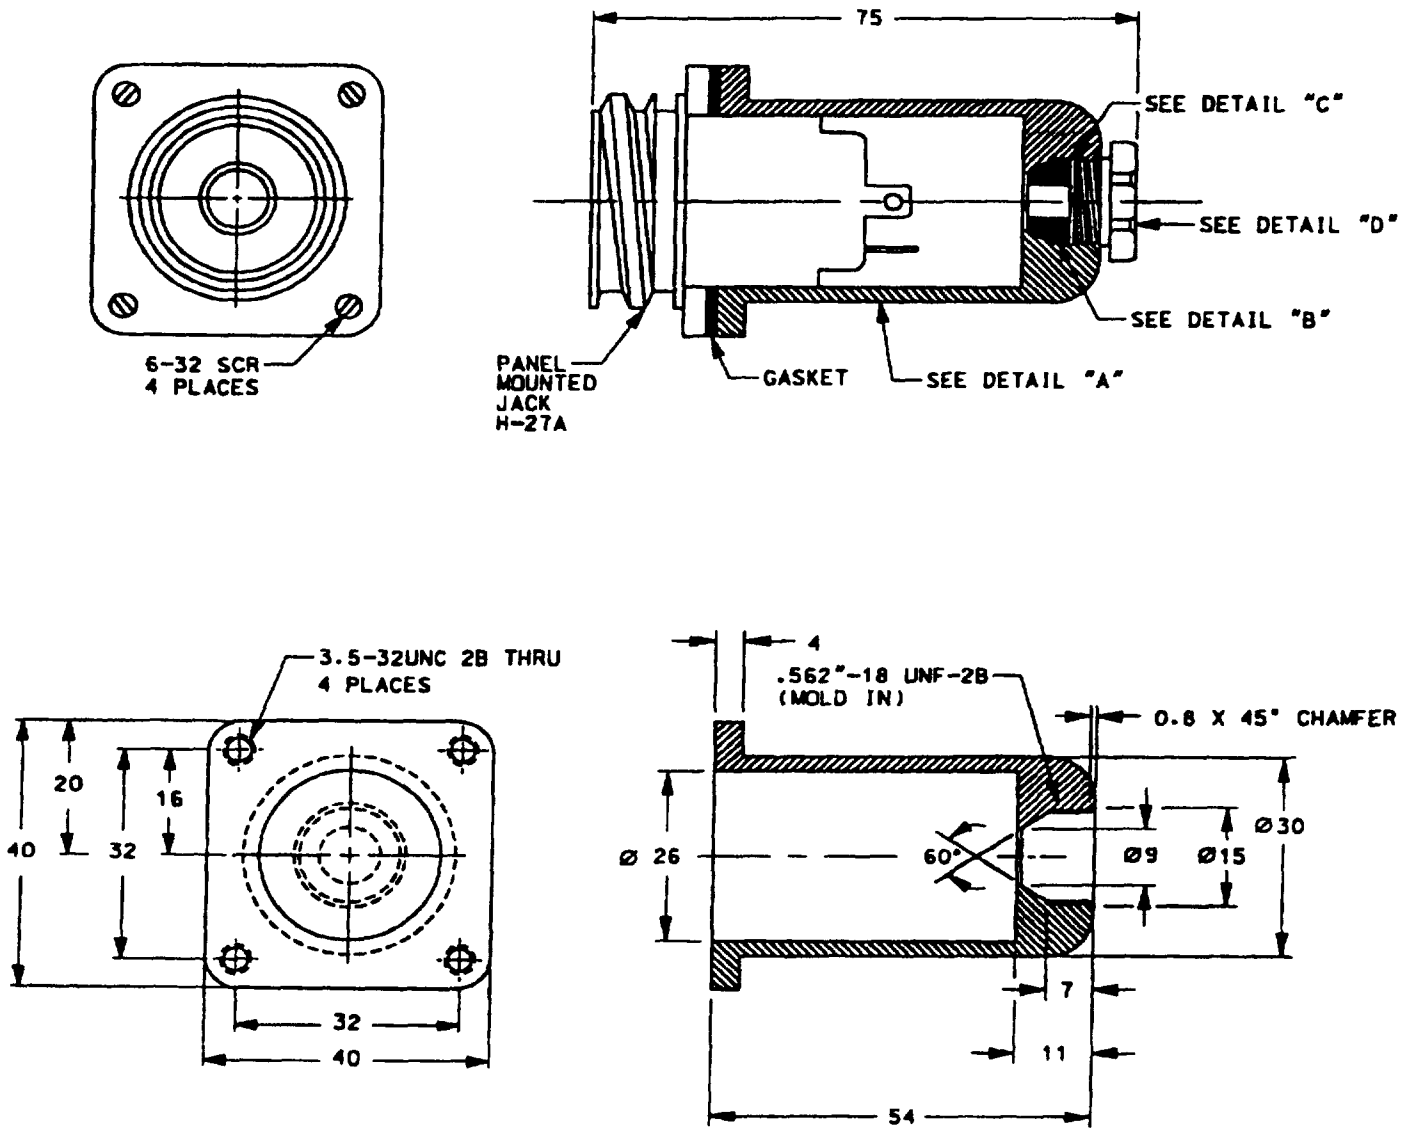


DETAIL "A"
JACK BODY

FIGURE 1 Portable jack type H-25A.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.

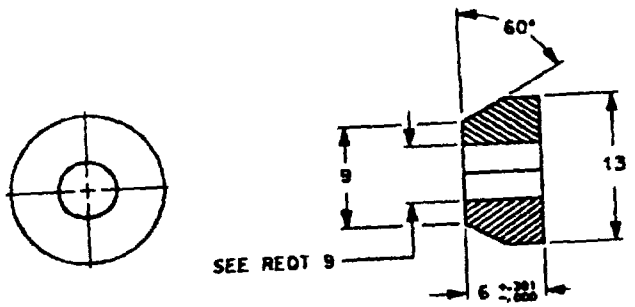

DETAIL "B"
(GROMMET)

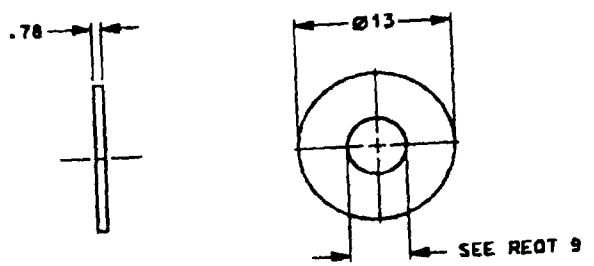

DETAIL "C"
(WASHER)

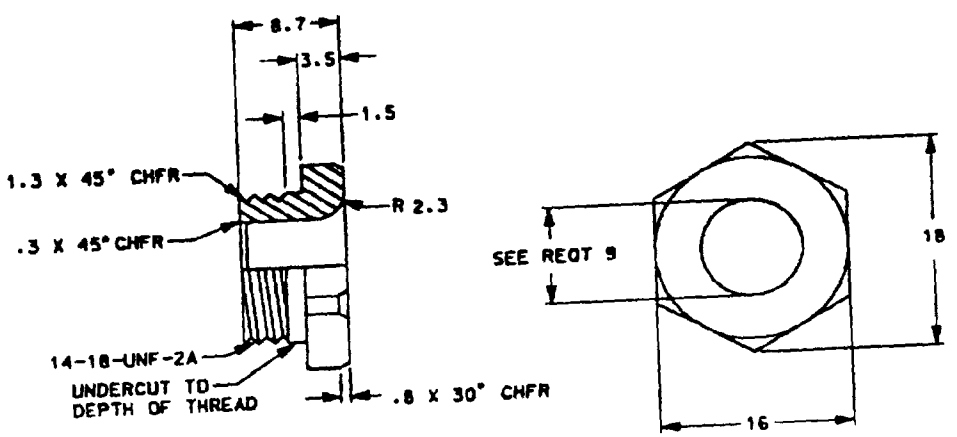

DETAIL "D"
(STUFFING NUT)

FIGURE 1 Portable jack type H-25A (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:40Z
Check the source to verify that this is the current version before use.