INCH-POUND

MIL-B-49030/1A(ER)
7 August 1990


SUPERSEDING
MIL-B-49030/1(EL)
22 November 1976

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, BA-3030/U

This specification sheet is approved for use by LABCOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the battery described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-B-49030(ER).

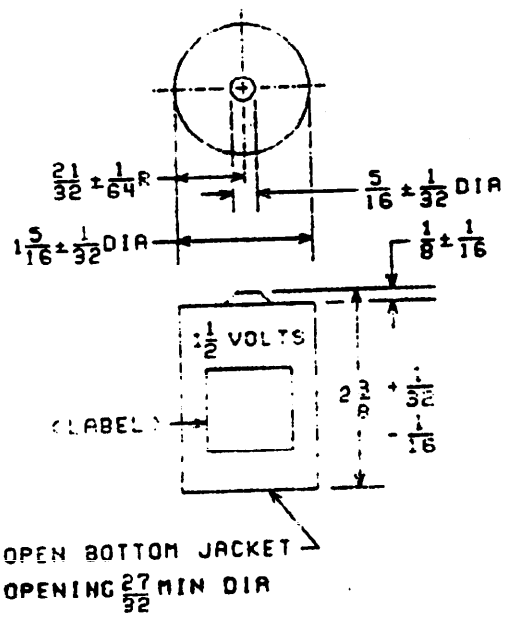

NOTE:
1. ALL DIMENSIONS ARE IN INCHES.

FIGURE 1. DIMENSIONS AND CONFIGURATION.

FSC 6135

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.5 volts.

Number and type of cell: 1 "D" cell.

Terminals: Flat surface.

Weight (maximum): 5.5 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: I, LT, and HT

Quality conformance inspection:

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: LT, HT, T, and D.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein:

Test	Storage period	Temperature	Minimum Svce Req'd (Hrs)
I (Initial 70°F)	48 Hrs Min	70°F	25
LT(0°F)	16 Hrs Min	0°F	4
HT (160°F)	7 days plus	160°F	
	48 Hrs Min	70°F	22
T	13 Wks plus	113°F	
	48 Hrs Min	70°F	20
D	52 Wks	70°F	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Discharge - The battery shall be discharged through 4.0 ohms continuously to an end voltage of 0.9 volt.

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 19.8 ohms.

Electrolyte leakage: The battery shall be discharged through 5 ohms for 24 hours.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.35

Unless expressly authorized, this information shall apply to Army and Air Force applications only.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project 6135-A233-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.