MILITARY SPECIFICATION

RAILWAY CAR, FLAT, DEPRESSED CENTER, HEAVY DUTY,

150 TON, DOMESTIC SERVICE

This amendment forms a part of Military Specification MIL-R-52768(ME), dated 21 November 1973, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 1

2.1, under SPECIFICATIONS, add:

"Federal

TT-E-489	- Enamel, Alkyd, Gloss (for Exterior and Interior Surfaces).
TT-P-645	- Primer, Paint, Zinc-Chromate, Alkyd Type."

Page 5

3.6, after "2'-0" ",change in two locations, "(max)" to"(nom)."

3.6, after "125,000 lbs", change "(max)" to "(est)".

3.7, delete second sentence.

Page 6

3.7, (c), after "car conditions," delete the remainder of sentence and substitute: "the lowest portion of car body shall be approximately 6-1/2 inches above the top of the running rail."

3.8, delete last sentence.

3.8.1, add: "Deck arrangement shall accomodate container mounting Configuration A, B or C as indicated on Figure 1b (see 6.2). All cars shall be furnished with 33 bosses (see Figure 1a)."

3.9, second line, change "All other" to "End".

3.9, delete last sentence.

3.10, delete last two sentences.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

Page 7

3.11.5, delete paragraph and substitute: "Each car shall be equipped with a handbrake arrangement approved by AAR and FRA."

3.12.1, delete "multiple-wear type".

Page 8

3.15, delete "color 14064" and substitute "except zinc chromate enamel, TT-P-645, to be used in lieu of primers TT-E-485 and MIL-P-15929. Trucks and components to be topcoat painted only with black enamel, TT-E-489".

3.15, after "AAR specifications", add: "and requirements for Defense Freight Railway Interchange Fleet".

3.17, second sentence, after "hot-punched", add: "or drilled".

3.19, line 2, after "side of car", delete remainder of sentence.

Page 9

3.21, line 2, after "applied," add "two".

Page 10

4.4.2, after "through" add: "4.5.2.6 and "; delete "4.5.2.7" and substitute "4.5.2.6".

Page 11

4.5.2.4, after "220 pounds", add: "(max)".

4.5.2.7, line 3, change "deflection" to "camber".

4.5.2.8, line 7, after "curve" add: "or the cross track method, which simulates the degree of truck swing in a 125 foot radius curve, may be used."

Page 12

4.5.2.10, at the beginning of first sentence, add: "When strikers are an integral part of the underframe and ".

6.2, add: "(d) When deck arrangement shall accomodate Container A, B, or C (see 3.8.1)."

Figures

"Figure 1a, X-2634 " is replaced by "Figure 1a, X-2634A ".

"Figure 1b X-2635 " is replaced by "Figure 1b X-2635A ".

Custodian:

Army - ME

Preparing activity:

Army - ME


Project No. 2220-A161

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

9. APPLY A THIN FILM (.002 IN.-.005 IN REF) OF SURFACE PRESERVATIVE (TECTYL 502-C, FREEDOM VALVOLINE OIL CO) TO SURFACE "K". REMOVE EXCESS PRESERVATIVE INCLUDING DRIPS & RUNS. PAINT IS PROHIBITED ON THIS SURFACE.

10. THE SPACE ENVELOPE DEFINED BY POINTS M & N SHALL CLEAR RAILCAR STRUCTURE AND DECK AS SHOWN.

11. THE LOWER SURFACE OF THE OUTSIDE LONGITUDINAL MEMBERS OF THE DEPRESSED PLATFORM SHALL BE CAPABLE OF BEING BLOCKED TO SUPPORT THE SPRUNG WEIGHT OF THE RAILCAR PLUS THE MAXIMUM LOAD.

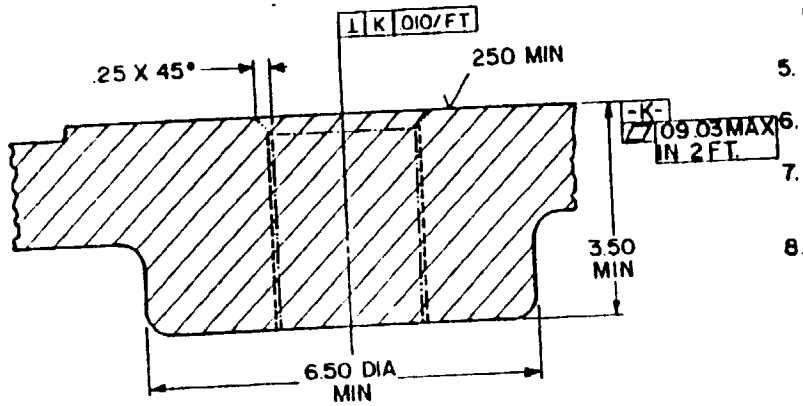

SECTION A-A

SHOWING BOSS AT 2.75-8 TAPPED HOLE LOCATION TYPICAL 8 OR 25 PLACES

1. RAILCAR SHALL BE FURNISHED WITH SURFACE "K" MACHINED AND WITH THE MIN MATERIAL THICKNESS AT HOLE LOCATIONS AND AREAS AS SPECIFIED.

2. RAILCAR PLATFORM OTHER THAN SURFACE "K" (SHADED AREA-MIN REQD SURFACE SHOWN) MAY BE AT ANY HEIGHT, FLATNESS OR ROUGHNESS PROVIDED IT IS NOT ABOVE SURFACE "K" OR MORE THAN .25 IN. BELOW SURFACE "K".

3. 2.75-8 TAPPED HOLES ARE SHOWN TO INDICATE MIN MATL THICKNESS REQUIRED.

4. EACH OF THE (8) 2.75-8 TAPPED HOLE LOCATIONS SHALL HAVE THE CAPABILITY OF WITHSTANDING A FORCE OF 90,000-100,000 LBS FOR A MINIMUM OF 10 MINUTES WITH NO EVIDENCE OF CRACKS OR DEFORMATION.

5. .50-13 TAPPED HOLES ARE SHOWN FOR INFORMATION ONLY.

6. ACCESS OPENING LOCATIONS ARE SHOWN SO THAT (4) 18X5 (MIN) ACCESS OPENINGS MAY BE ADDED IN PLATFORM SIDE, UNDER AREA "L"

7. SPACE BELOW AREA "L" ON SURFACE "K" SHALL REMAIN CLEAR FOR BOLTING PURPOSES. (1.50-6 X 9.00 LG SOC HD CAPSCREW)

8. THIS INTERFACE DWG IS DESIGNED TO ACCOMODATE THREE DIFFERENT SHIPPING CONTAINER MOUNTINGS (A, B & C)

RAILCAR APPLICATION	
CONTAINER	REQUIREMENTS
A	SURFACE "K" (3) .495-.500 DIA HOLES (8) 2.75-8 HOLES (16) .50-13 HOLES
B	SURFACE "K" ACCESS OPENINGS
C	SURFACE "K" (25) 2.75-8 TAPPED HOLES MARKED ⊙

FIGURE 1b

RAILCAR INTERFACE REQUIREMENTS FOR SHIPPING CONTAINER MOUNTING. SEE NOTE 8

X-2635A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.

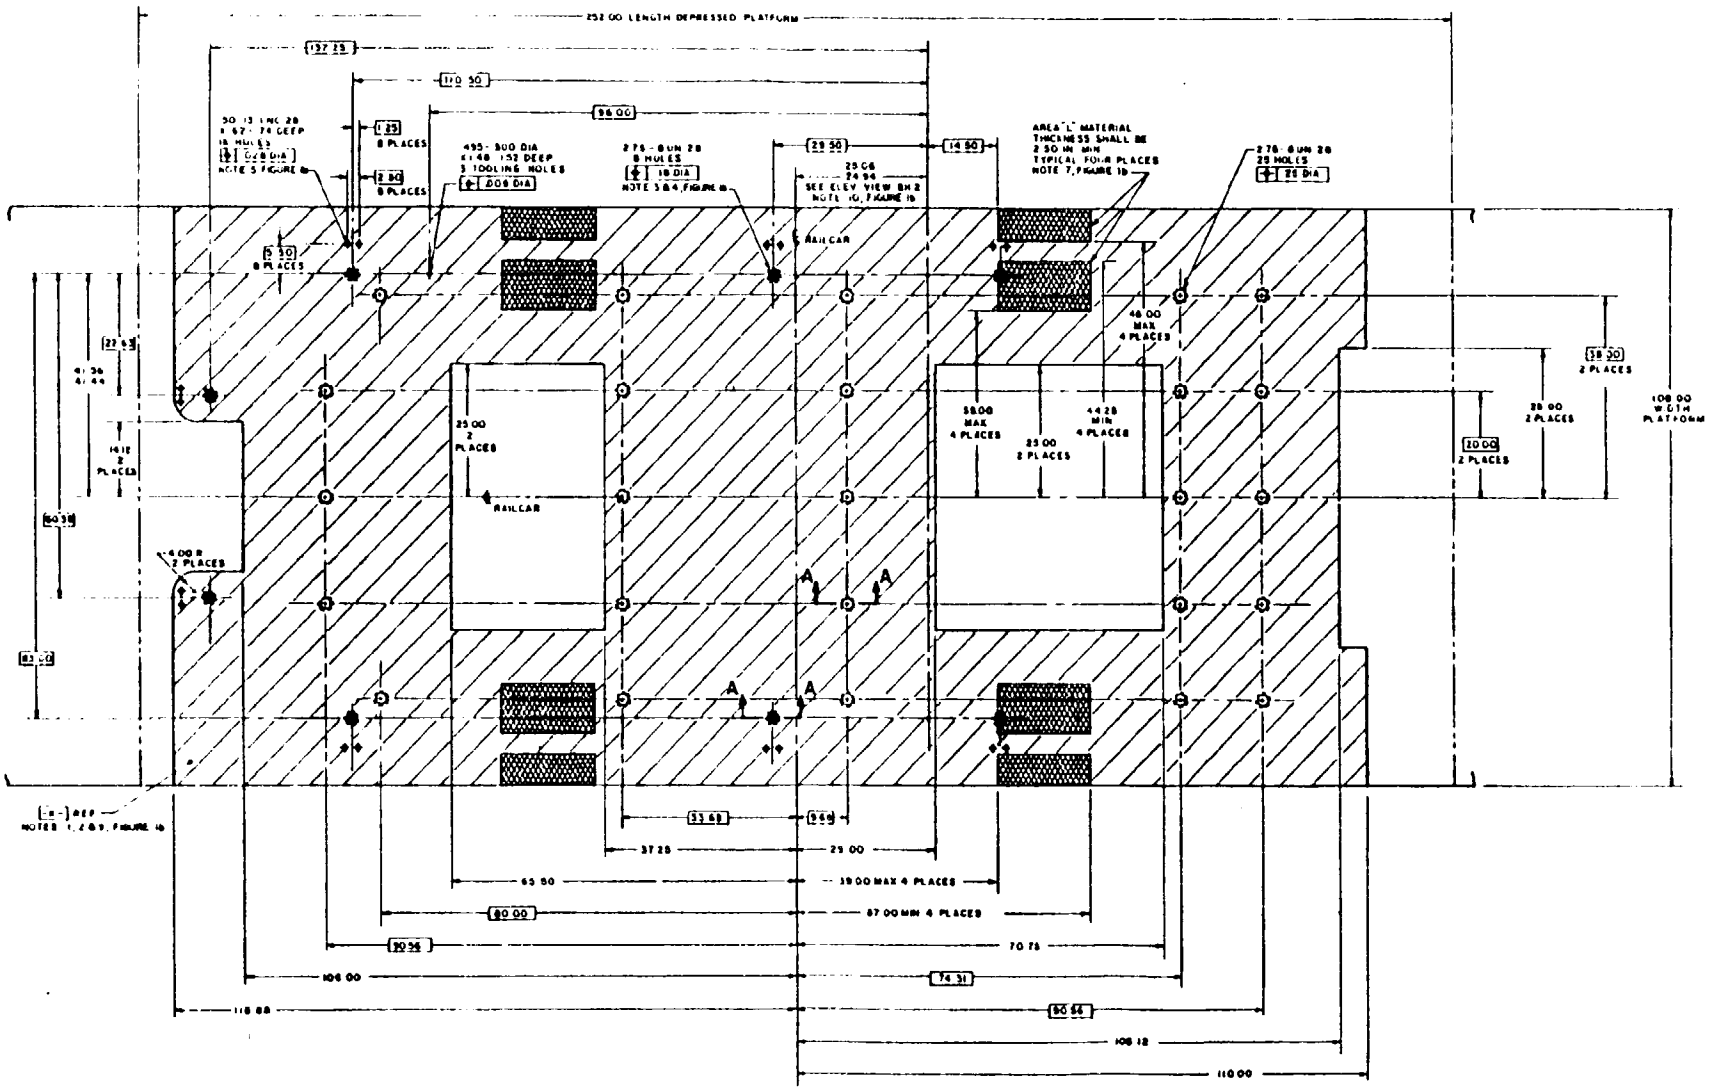


FIGURE 1a.

PLAN VIEW-DEPRESSED CENTER RAILCAR

X-2634A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:32Z
Check the source to verify that this is the current version before use.