
MIL-S-55433/3C
15 July 1969
SUPERSEDING
MIL-S-55433/3B
21 November 1968

MILITARY SPECIFICATION SHEET

SWITCH CAPSULE, DRY REED TYPE, SPDT, 1/2 AMPERE

The complete requirements for procuring the switch capsule described herein shall consist of this document and the latest issue of Specification MIL-S-55433.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

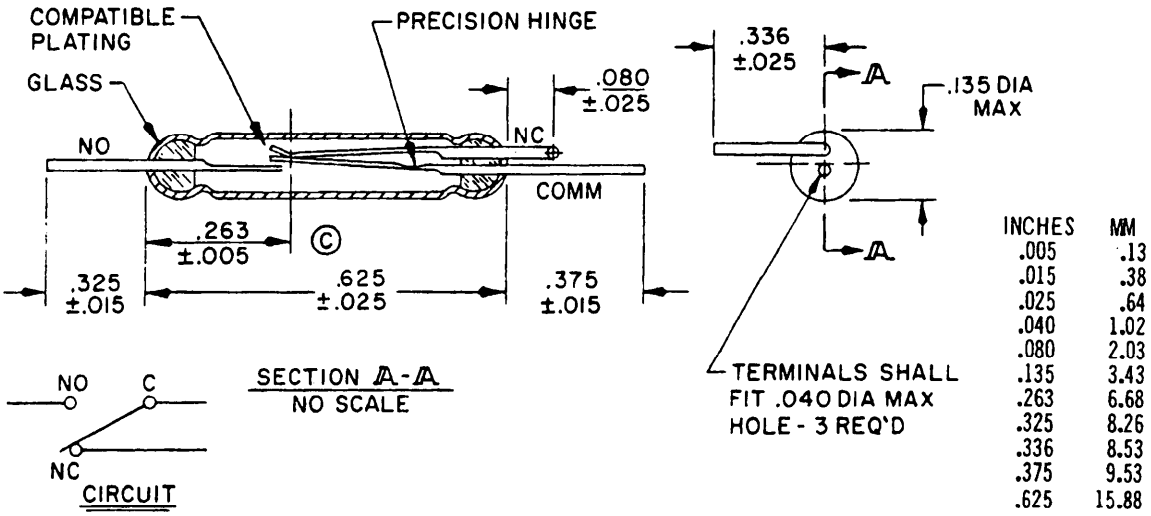

INCHES	MM
.005	.13
.015	.38
.025	.64
.040	1.02
.080	2.03
.135	3.43
.263	6.68
.325	8.26
.336	8.53
.375	9.53
.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

Contact resistance: 100 milliohms maximum initial. 2 ohms maximum after life.

Operate and release ampere-turns:
Operate - See table I.
Release - 30 to 75 percent of operate.

Contact bounce:
NO - 300 microseconds, maximum.
NC - 1,000 microseconds, maximum.

Operate and release time: 1 millisecond, maximum.

Operating temperature range: -55° to +125°C.

Dielectric withstanding voltage: 250 volts ac.

Terminal strength: Applied force - 2 pounds.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Part number: See table I.

© denotes change

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

TABLE I. Operate ampere-turns and part numbers.

Operate ampere-turns	Part No.
35 ± 15 NI	M55433/3-001
65 ± 15 NI	M55433/3-002

Load life: See table II.

TABLE II. Load life.

Load current Amperes dc	Millions of operations			
	Resistive		Inductive	
	28v	15v	28v	15v
0.500 (high level)	1.0	2.0	---	---
0.250 (high level)	5.0	10.0	0.2	0.5
0.125 (high level)	10.0	20.0	2.0	5.0
0.030 (high level)	30.0	50.0	5.0	7.5
0.010 (low level)	50 at 50 mv			

The loads to be used for life test and the number of sample units for each test load shall be as follows:

0.500 amperes, 28v, resistive - 10 sample units
0.030 amperes, 28v, resistive - 5 sample units
0.030 amperes, 15v, resistive - 5 sample units
0.010 amperes, 50mv, resistive - 10 sample units
0.250 amperes, 28v, inductive - 10 sample units
0.030 amperes, 28v, inductive - 5 sample units
0.030 amperes, 15v, inductive - 5 sample units

All other load-life ratings are for application information only.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy -
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5930-0676-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-55433/30 SWITCH CAPSULE, DRY REED TYPE, SPDT, 1/2 AMPERE

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:21Z
Check the source to verify that this is the current version before use.