MILITARY SPECIFICATION

TARGET GENERATOR, SIMULATED, SUBSYSTEM OF TARGET SELECTOR GROUP, XM10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of Simulated Target System known as Target Generator, Simulated Subsystem of Target Selector Group, XM10 used for Vulcan Air Defense System (VADS) gunner training and evaluation. The system will be referred to as Simulated System.

2. APPLICABLE DOCUMENTS

2.1 The following documetns, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MIL-T-48419	Tester, System
MIL-C-48438	Simulated Target Generator, Unit 6
MIL-E-55119	Headset, Type H161AU
MIL-C-3885	Cable Assemblies and Cord Assemblies, Electrical
MIL-F-13926	Fire Control Material: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Material, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MIL-STD-105	Sampling, Procedure and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-461	Electromagnetic Interference Characteristics for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods

DRAWINGS

F10549290	Tester, System
F11741100	Simulated Target Generator
A11736300	Target Generator, Simulated, Subsystem of Target Selector Group, XM10

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

DRAWINGS

F11743703	Cable Assembly, Lock on Cable (W32)
D11743708	Cable Assembly (W27)
F11743709	Cable Assembly (W25)
D11743711	Cable Assembly (W13)
F11743712	Potentiometer Assembly, Elevation
A11743776	Visual Image Generator (AA1), Unit 7
F11744626	Mount, Simulated Target Generator, Unit 8
F11745270	Cable, Main Interface (W1/W34)
11745271-2	Cable Assembly (W28)
11745274-1	CabLe Assembly (W8)
D11745275	Adapter Assembly (CP-1)
F11745276	Box, Boresight
C11746246	Kit, Spare Parts
F11746310	Container
FI1746311	Shield Gun Assembly
F11746319	Case, Transit for Simulator Mount

PACKAGING DATA SHEET

11736300	Target Generator, Simulated, Subsystem of Target Selector Group, XM10

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 List of Assemblies. The Simulator System shall be comprised of the following assemblies which shall have been inspected and accepted in accordance with their respective drawings and specification prior to incorporation as a set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.1.1 Major Component List. The major components shall be as specified in Table I.

TABLE 1. - MAJOR COMPONENTS

DETAILED SPECIFICATION	TITLE	ASSEMBLY PART NO.
MIL-T-48419	Tester, System	F10549290
MIL-G-48438	Simulated Target Generator, (STG), Unit 6	F11741100
MIL-C-3885	Cable Assembly, Lock On Cable (W32)	F11743703
MIL-C-3885	Cable Assembly (W27)	D11743708
MIL-C-3885	Cable Assembly (W25)	F11743709
MIL-C-3885	Cable Assembly (W13)	D11743711
	Potentiometer Assembly, Elevation	F11743712
	Visual Image Generator (AA1) Unit 7	A11743776
	Mount, Simulated Target Generator, Unit 8	F11744626
	Cable, Main Interface (W1/W34)	F11745270
MIL-C-3885	Cable Assembly (W28)	11745271-2
MIL-C-3885	Cable Assembly (W8)	11745274-1
	Adapter Assembly (CP-1)	D11745275
	Box, Boresight	F11745276
	Kit, Spare Parts	C11746246
	Container	F11746310
	Shield Gun Assembly	F11746311
	Case, Transit for Simulator Mount	F11746319
MIL-E-55119	Headset, Type H161AU	55119-H161AU

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.2 Environmental

3.2.1 Temperatures

3.2.1.1 Operating. The Simulator System shall meet the requirements of this specification in ambient temperatures of -4°F to +140°F including solar radiation.

3.2.1.2 Storage. The Simulator System shall be capable of withstanding temperature stabilization at +160°F and -67°F. The system shall not be damaged or adversely affected by this exposure.

3.2.2 Humidity

3.2.2.1 Operating. The Simulator System shall meet the requirements of this specification while exposed to the operational conditions of MIL-STD-81OB, Method 507.

3.2.2.2 Storage. The Simulator System shall not be damaged or adversely affected by exposure to the storage condition of MIL-STD-810B, Method 507.

3.2.3 Rain. The Simulator System shall not be damaged or adversely affected by exposure to the conditions of MIL-STD-81OB, Method 506.

3.2.4 Salt/Fog. The Simulator System shall not be damaged or adversely affected by exposure to the conditions of MIL-STD-810B, Method 509.

3.2.5 Dust. The Simulator System shall not be damaged or adversely affected by exposure to the conditions of MIL-STD-810B, Method 510.

3.2.6 Fungus. The Simulator System shall not be damaged or adversely affected by exposure to the conditions of MIL-STD-810B, Method 508.

3.2.7 Altitude, Operating and Storage. The Simulator System shall not be damaged or adversely affected by exposure to the conditions of MIL-STD-810B. Method 500

3.2.8 Electromagnetic compatibility. - The Simulator System shall meet the RE02 requirements of MIL-STD-461.

3.3 Cables. All cables shall meet the requirements of MIL-C-3885.

3.4 Performance. The Simulator System when connected to a VADS towed or self-propelled, Figure 1, shall perform as prescribed hereinafter.

3.4.1 Power. The Simulator System shall meet all the requirements of this specification when the Vulcan power is between the limits of 28-30 VDC.

3.4.2 Smoke Obscuration. The image shall be blanked to simulate smoke obscuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.4.3 Crossover. The Simulator System shall be capable of indicating target crossover.

3.4.4 Operation during Vulcan Firing & Slewing. The Simulator System shall operate without degradation during VADS firing and slewing.

3.4.4.1 Slewing Limitation. The Simulator System will have the capability of limiiting VADS slewing to 180°.

3.4.5 VADS Indicator. The Simulator System will be capable of monitoring the following VADS indicators:

a. Radar Mode

b. Manual Mode

c. Radiate

d. Acquisition Time Delay (ATD)

e. Ready to Fire (RTF)

3.4.5.1 Firing Indicator. The Simulator System will be capable of monitoring VADS cannon firing for 2 bursts.

3.4.5.1.1 The Simulator System will be capable of indicating firing before or after RTF and before or after crossover.

3.4.6 System Outputs to VADS. The Simulator will provide the following outputs to VADS:

a. Radar Ready Signal

b. 10 volt reference

c. -10 volt reference

d. +20 volt reference

e. Radar lock-on signal when target is within the 60 mil reticle,

f. Target range stow value to be present only during a "no lock on" condition.

g. Range signal during "lock on"

h. Range rate stow value to be present only during a "no lock on" condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

i. Range rate value during "lock on"

j. ECM signal.

3.4.7 Foresight. - The boresight box shall provide the means of manually positioning the target image in both azimuth and elevation.

3.4.8 Elevation Pot. - The elevation pot shall provide a means of determining VADS elevation position.

3.4.9 Tachometer. - The VADS tachometer signal shall provide the means to determine VADS azimuth position.

3.4.10 Crosshair meter. - The Simulator system shall provide a crosshair meter to indicate zeal time target position relative to the 15 and 60 mil retitles.

3.4.11 Stored tracking error. - The Simulator System shall provide a stored integrated value of tracking error in both elevation and azimuth for two cannon firings per flight path.

3.4.12 Audio.

3.4.12.1 Communicaiton link. - The Simulator System shall provide a communication link such that the STG operator and VADS gunner shall have audio contact.

3.4.12.2 Hit signal. - The Simulator System shall provide to the operator and gunner a simulated hit tone. This tone shall be audible when the gunner fires when both integrated values of tracking error are 8 mils or less.

3.4.13 Built-in-test equipment. - The Simulator System shall provide a Built-In-Test capability for fault isolation.

3.5 Reliability. - The Mean Time Between Failure (MTBF) for the system shall be 100 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISION

4.1 General.

4.1.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1.1 General Provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specificaiton. Definitions of inspection terms shall be as listed in MIL-STD-109,

4.1.2 Special tests and examinations.

4.1.2.1 First article (initial Production) approval. - The requirements for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall be 2 systems manufactured in the same manner using the same materials, equipment, processes, including packaging and packing, obtained from the same source of supply as used in regular production. The system shall meet the requirements and tests of Table II.

4.1.2.1.1 Government testing. - When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.1.2.1.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample ‘ and a record of this inspection including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor’s inspection.

4.1.2.2 Control tests. - One system shall be selected at random as a control sample from each 30 produced. the contrrol sample shall meet the requirements and tests of Table II except for Fungus and Firing tests,

4.1.2.3 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

TABLE II - TEST AND REQUIREMENTS

TEST	REQUIREMENT	TEST PROCEDURES
Performance	3.4	4.4
Temperature	3.2.1	4.3.5
Humidity	3.2.2	4.3.6
Rain	3.2.3	4.3.7
Salt/Fog	3.2.4	4.3.8
Dust	3.2.5	4.3.9
Fungus	3.2.6	4.3.10
Altitude	3.2.7	4.3.11
Firing	3.4.4	4.6

4.2 Quality conformance inspection

4.2.1 Submission of product. - Unless otherwise specified herein, or by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" as specified in MIL-STD-105.

4.2.2 Acceptance and rejection - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and re-submittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.2.3 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply equipment in accordance with the applicable requirements of MIL-I-45607. The Government reserves the rightright to use the test equipment for its own independent inspections to the extent that such use will not unduly interfere with the contractor’s delivery schedule.

4.2.3.1 Contractor designed equipment. - The contractor shall provide inspection equipment compatible with the "Test Methods and Procedures" specified in-the detail specification and with the "Component Inspection" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, simentsions and tolerances used in the design test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerances limit, and permit positive rejection when nonconforming. construction shall be such as to facilitate routine calibration of test equipment.

4.2.3.2 TRest equipment. - Test equipment used to test assemblies for verification of Section 3 electrical requirements shall be as specified in the unit detail specifications.

4.2.4 Examinations. - Unless otherwise specified, components and subassemblies shall be inspected in accordance with the "Inspection provisions for components and subassemblies" and the Sampling Plan Tables contained in MIL-F-13926. Examinations to verify requirements of 3.3 shall be performed. Examinations and tests for packaging, packing and

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

marking shall be in accordance with MIL-P-14232 and Section 5 herein.

4.2.5 Functional tests. - All performance requirements shall be inspected on a 100 percent basis. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a. Temperature	+50°F to +90°F
b. Relative humidity	90 percent RH max.
c. Pressure	28 to 32 inches of Hg

4.3 Environmental test methods and procedures. - Test conditions, performance, facilities and data shall be in accordance with MIL-STD-810.

4.3.1 Pretest data. - Prior and subsequent to each environmental test the Simulator System shall meet the performance requirements of paragraph 4.4.

4.3.2 Configuration. - Environmental operating test setup shall be in accordance with Figure 1.

4.3.3 Environmental operating test Procedures.

4.3.3.1 Initial conditions. - Turn STG power on, place in simulator mode, hold and reset. Turn VIG "on" and STG display in Norm mode.

4.3.3.2 Audio. - Check that communications exist between Boresight Box and STG console.

4.3.3.3 Boresight. - Depress STG Boresight switch to Boresight (light on). Adjust azimuth and elevation on Boresight Box so that target is in center of Mount display.

4.3.3.4 Elevation. - Rotate shaft of elevation pot. Target should move smoothly in elevation.

4.3.3.5 Image integrity. - With target within the display field of view, depress Run/Hold switch to Run. Observe that there is no degradation of image through complete flight.

4.3.3.6 Built-in-tests. - The simulator system shall meet the requirements of paragraph 4.4.10.

4.3.4 Test limitations. - (a) Fungus testing shall be performed , on one unit of the first article sample only. (b) The GFP, STG and major cable assemblies shall not be exposed to the storage portions of the environmental test requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.3.5 Temperature.

a. High temperature. - This test shall be conducted in accordance with Procedure I, Method 501 of MIL-STD-810B. The high temperature operation shall be +140°F.

b. Low temperature.- This test shall be conducted in accordance with Procedure I, Method 502 of MIL-STD-810B. The low temperature operation shall be -4°F. Storage temperature exposure shall be 48 hours.

4.3.6 Humidity. - This test shall be subjected to the humidity test as outlined in MIL-STD-810, Method 507, Procedure II, except that tests of 4.3.3 shall be conducted during lst, 2nd, and 3rd cycles.

4.3.4 Rain. - This test shall be conducted in accordance with Method506 MIL-STD-810B.

4.3.8 Salt Fog. - This test shall be conducted in accordance with Method 509 of MIL-STD-810B.

4.3.9 Dust. - This test shall be-conducted in accordance with Method 510 MIL-STD-810B.

4.3.10 Fungus. - This test shall be conducted in accordance with Method 508 of MIL-STD-81OB.

4.3.11 Altitude. - This test shall be conducted in accordance with Method 500 of MIL-STD-810B.

4.3.12 Electromagnetic compatibility. - This test shall be conducted in accordance with MIL-STD-462, Method RE02.

4.4 Performance tests. - These tests should be run with on person (gunner) in the VADS system and one person (operator) operating the console.

4.4.1 Configuration. - Setup equipment in accordance with Figure 2. Turn VADS system on.

4.4.2 Power. - Check that VADS output is between 28-30 volts at pins A (+24V) and B (Ret) on VADS Unit 5 connector W5P2.

4.4.3 Audio. - Place STG to power on, to simulator mode, hold and reset. Establish communications between operator and gunner.

4.4.4 Boresight. - Depress STG Boresight switch to Boresight (light on). Turn VIG on and display to Norm mode.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:27Z
Check the source to verify that this is the currentversion before use.

4.4.4.4.1 Target Position. - The gunner will adjust the azimuth and elevation pots on Boresight Box to center the target in the 15 mil reticle.

4.4.5 Tachometer. - Set the run selector switch to "04", depress reset button. Take the STG console out of Boresight mode and depress Run/Hold indicator to "Run." When the target approaches the reticle pattern depress the Run/Hold indicator to "Hold". By use of the Bore-sight pots adjust the target position to a fixed object in the center of the reticle.

4.4.5.1 Hold test. - When the VADS turret is moved to ± 5° in azimuth the target should remain on the fixed object by adjusting the STG target alignment control.

4.4.6 Elevation Pot. - With system setup as in paragraph 4.4.5 move VADS gun 15° in elevation. The target should not move more than 2 mils from the fixed object.

4.4.7 VADS indicators. - With system setup as in paragraph 4.4.5 adjust the elevation and azimuth controls located beneath the tracking error indicator on the STG console until the azimuth and elevation pointers cross in the center of the indicator. Mechanically cage VADS sight. Place VADS in Manual Mode. Manual Mode indicator on STG should lite. Place in Radar Mode and Radar Mode indicator should light. Depress VADS action switch and radiate switch. STG console, radiate, lock-on and ready to fire indicators should lite. ATD indicator should light after a short delay.

44.7.1 Firing indicator. - Depress action switch and trigger one time Fire 1 (Fl) indicator should lite. Depress action switch and trigger again. Fire 2 (F2) indicator should lite. Reset console.

4.4.7.2 Tracking error indication. - Adjust traaking error meter so that azimuth crosshair is outside of 60 mil reticle. Repeat 4.4.7.1. Indicators should blink. Reset console.

4.4.7.3 Crossover indication. - Put console in Run Mode. When crossover indicator lites put console in Hold Mode. Repeat 4.4.7.1 and crossover indicators should blink.

4.4.8 Simulated Flit Tone. - Set up in accordance with 4.4.7, Depress action switch and trigger. operator and gunner should hear hit tone in Headset.

4.4.9 Stored tracking error. - Adjust azimuth and elevation crosshairs to center of 15 mil reticle. All zero’s should be on digital readouts. Depress action switch and trigger twice. Depress F1 and F2 error stitch so that F1 error lights. Adjust crosshair to edge of 15 mil reticle, Each set of readouts should read all zeros for F1 error and F2 error.

4.4.9.1 Step 2. - Reset and depress action switch and trigger twice. Adjust crosshairs to center of 15 mil reticle. Each set of readouts should read 07 ± 01 for F1 error and F2 error.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.4.10 Built-in-test. - Place self test rotary switch to position 24 and Simulator/Tester switch to Tester Mode.

4.4.10.1 With VIG BIT switch in position of column A of Table III, the azimuth and range meters should read as indicated in column B and C respectively.

TABLE III - VIG BUILT-IN-TEST

A	B	C
BIT switch position	AZ meter	Range meter
1	Green band	0
3	Blue band	0
4	Green band	0
5	Green band	0

4.4.11 Smoke Obscuration. - Reset console. Put the STG console in Boresight mode and depress Run/Hold switch to Hold. Adjust Boresight pots so that target is in center of display. Ad-just tracking error meter so that crosshairs are in center of meter.

4.4.11.1 Place console smoke obscuration switch to smoke position. Depress action switch and trigger. Target should blank for approximately 1 second.

4.4.12 Crosshair Meter. - Set up in accordance with 4.4.11. Connect a 10K 5% 1/4 watt resistor between pins h and b of console connector J2. Place the VADS in external mode.

4.4.12.1 Slew the turret clockwise so that a 50-100 mil lead angle is generated in azimuth. Utilizing the boresight box move the target so that the target is centered in the sight 15 mil reticle the tracking error meter shall be 3 mils or less of the center in azimuth and the azimuth digital readouts should read 3 mils or less.

4.4.12.2 Repeat. 4.4.12.l rotate the turret counterclockwise.

4.4.12.3 Repeat 4.4.12.1 and 4.4.12.2 except the generated lead angle will be 200-250 mils

4.4.13 Slewing Limitation. - Put console in Boresight mode and reset. Take console out of Boresight and rotate turret clockwise at 100° ± 10° the turret will stop and the Boresight indicator will blink.

4.4.13.1 Repeat 4.4.13 except turret will be rotated counterclockwise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.5 Reliability demonstration. - A reliability demonstration test shall be conducted as part of the First Article Test to assure compliance with 3.5 at a 90% confidence level. The systems shall operate at least 4 hours during exposure to the operating environments of 4.3 and after the non-operating environments exposures. Additional hours shall be accumulated at 75 ± 15°F until the total test operating hours meet the accept/reject criteria in Table V. the performance requirements of 4.4 shall be performed at least once each operating hour except 4.4.14.

TABLE V

TOTAL OPERATING HOURS	RELIABILITY FAILURES ACCEPT NO.	REJECT NO.
230	0	7
390	1	7
535	2	7
670	3	7
800	4	7
925	5	7
1060	6	7

4.5.1 Data collection. - Data collected will consist of all equipment malfunctions, number of hours completed when malfunction occurred, nature and cause of malfunction, time required to correct malfunction, required corrective action, item serial number and environmental exposure.

4.5.2 Failure definition. - A failure is defined as any malfunction which renders the system inoperative or operative outside the limits of this specification. In determination of chargeable reliability failures the following clarification shall apply:

a. If upon failure analysis (to determine the cause of the malfunction) an assignable cause (related to manufacturing process, procedure, basic design weakness, ets.) is determined as the basis of the malfunction, the malfunction will not be chargeable as a reliability failure. However, correction to the manufacturing process or procedure (et al) shall be accomplished.

b. If upon failure analysis no assignable cause is evident and the malfunction is considered random in nature, the malfunction shall be a "chargeable" reliability failure and as such must be considered in the above demonstration test criteria. The decisions as to the chargeable reliability failure must be co-ordinated with the procuring activity, Frankford Arsenal, Reliability and Maintainability Engineering Branch, SARFA-QAF-R.

4.5.3 System interruption. - A system interruption is any system malfunction for which the system is operable within the limits set forth in this specification, but requires maintenance to correct the malfunction. Although a system interruption does not penalize the reliability, it may constitute a failure of some major subassembly or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.


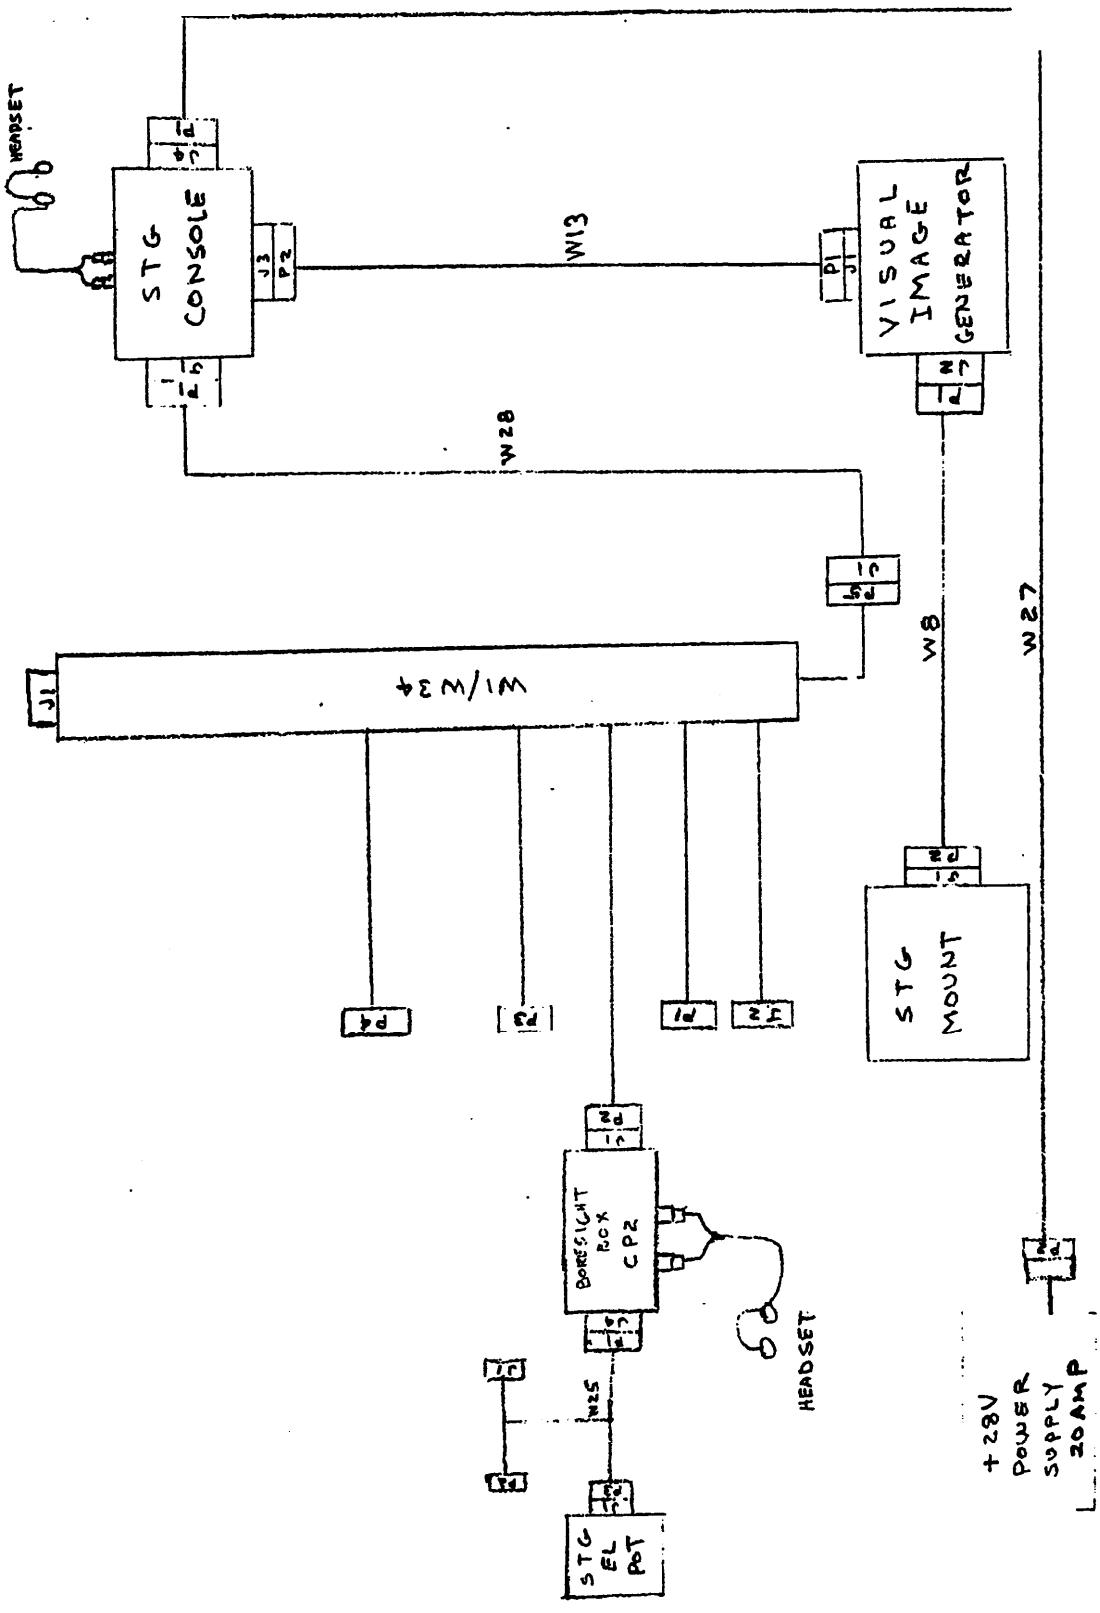


FIGURE I

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

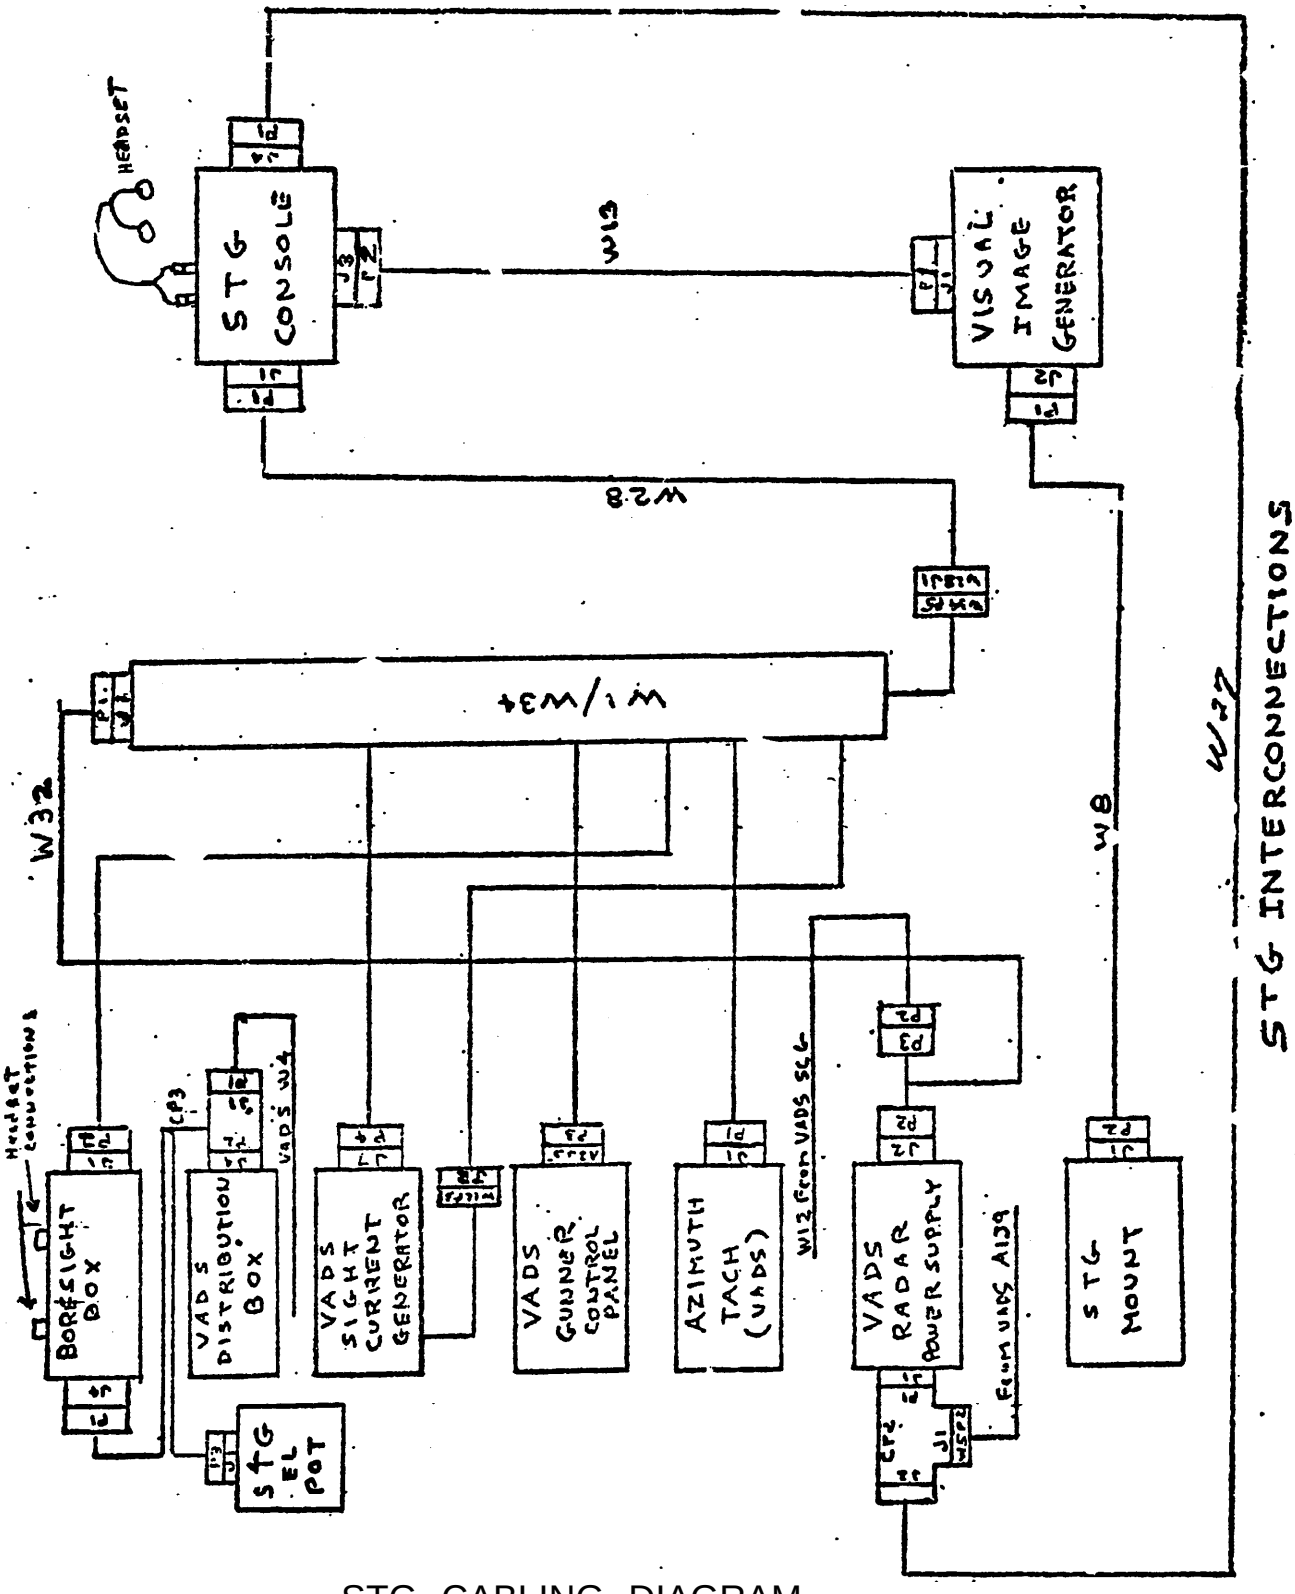

STG CABLING DIAGRAM
FIGURE II

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

component for which system acceptance cannot be made until that characteristic or component which caused the system interruption has been screened.

4.6 Firing. - One of the first article systems shall be selected by the government to perform the following tests: With the target in the center of the sight the Vulcan should fire ten 100 round bursts. The target should not be displaced more than 5 mils during firing. After the firing the Simulator System shall meet all the requirements of 4.4 The firing test will be performed at a Government facility. The Government will be responsible for the Bulcan system, , ammunition and operation during firing. The contractor will be responsible for the delivery of the simulator system to the designated location, set up of the simulator system, the performance tests after firing, and return of simulator system to the contractor's plant.

5. PREPARATION FOR DELIVERY

5.1. General. - Packaging and marking shall be in accordance with the requirements as specified in the applicable Packaging Data Sheet (PDSD), 11736300.

6. NOTES

6.1 Intended use. - The Target Generator, Simulated, Subsystem of Target Selector Group XM10: A11736300 is used to evaluate gunner proficiency against computer simulated aircraft.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Instructions for arranging of examination, test, and approval of first article.

6.3 Instruction for models and samples.

6.3.1 Instruction for Preproduction sample. - Preproduction samples shall be as specified in the contract.

6.3.2 Tests. - Any change to control tests specified in 4.1.2.2 is to be so specified in the contract.

6.3.2.1 Firing. - Location for the firing test shall be specified in the contract.

Custodian:

Army -MU

Preparing activity:

Army - MU

Project No. 1240-A572

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-48445A(MU) Target Generator Simulated, Subsystem of Target Selec tor Group, XM10

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Frankford Arsenal
ATTN: SARFA-MDM
Phila., PA 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.