

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS
5305

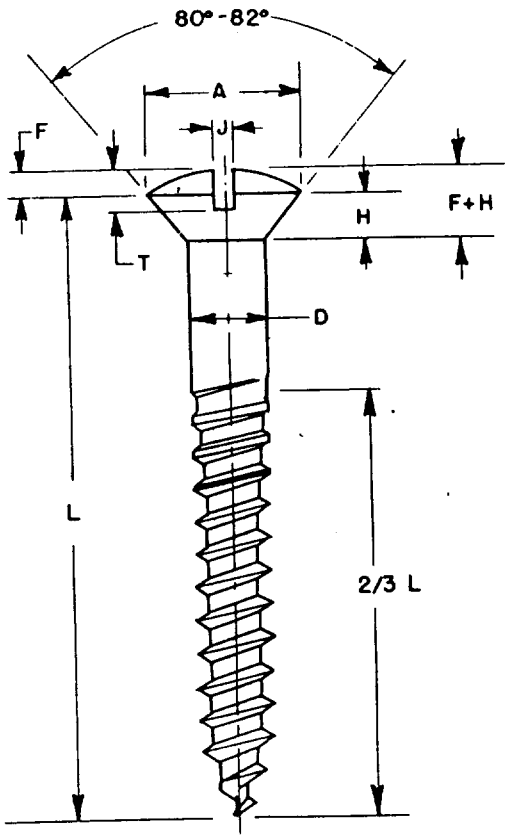



APPROVED 8 MAY 1957 REVISED (A) 19 AUGUST 1966

(Project 5305-N011Sh) (A) For changes see sheets 1 and 2

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS 16215 (SHIPS)
Ships	A - N - AF -	SCREWS, WOOD, SLOTTED OVAL HEAD 82°, AUSTENITIC, CORROSION RESISTING STEEL, NONMAGNETIC	
Procurement Specification (A) FF-S-111			SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS 5305

Nominal size		10	12	14
Threads per inch		13	11	10
(D) Basic size	+0.004 -0.007	0.190	0.216	0.242
(A) Diameter of head	Max. sharp	.385	.438	.491
	Min. sharp	.359	.410	.461
	Absolute min. with flat	.340	.389	.437
(H) Height of head	Max.	.116	.132	.148
	Min.	.098	.112	.127
(J) Width of slot	Max.	.060	.067	.075
	Min.	.050	.056	.064
(T) Depth of slot	Max.	.103	.117	.132
	Min.	.084	.096	.108
(F) Height of oval	Max.	.061	.069	.077
	Min.	.050	.057	.064
F + H	Max.	.177	.201	.225
	Min.	.148	.169	.191
(S) Flat on min. screw		.007	.008	.009

(L) Length	Length tolerance	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN
3/4	+0 -3/64	1		--		--	
7/8		2		10		--	
1		3		11		19	
1-1/4		4		12		20	
1-1/2		5		13		21	
1-3/4	+0 -1/16	6		14		22	
2		7		15		23	
2-1/4		8		16		24	
2-1/2		9		17		25	
2-3/4		-		18		26	
3	+0 -3/32	-		--		27	

Material: Austenitic corrosion-resisting steel shall be in accordance with class 302, 303, 304, 305, 310 or 316 of Specification QQ-S-763 or composition FS 302, 304, 310 or 316 of Specification QQ-W-423.

Tensile strength: Tensile strength shall be 70,000 p. s. i. minimum.

Permeability: The magnetic permeability of the screws shall not exceed 2.0 (mμ) when tested with a permeability indicator in accordance with Specification MIL-I-17214.

Dimensions: All dimensions are in inches unless otherwise specified.

Thread length: Thread length shall be approximately 2/3 L.

(A) Protective coating: Screws shall be passivated in accordance with QQ-P-35

Notes:
1. Referenced documents shall be the issue in effect on date of invitation for bids.
2. In case of conflict with any document referenced herein this standard shall govern.

APPROVED 8 MAY 1957 REVISED (A) For changes see sheets 1 and 2

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS 16215 (SHIPS)
Ships	A - N - AF -	SCREWS, WOOD, SLOTTED OVAL HEAD 82°, AUSTENITIC, CORROSION RESISTING STEEL, NONMAGNETIC	SHEET 2 OF 2
Procurement Specification (A) FF-S-111			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.