
USER SYMBOLS: ARMY - EL, MI
REVIEWER SYMBOLS: NAVY - AS, USAF - 11, ARMY - AV, DSA - ES
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Suitables for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 5310

CONFIGURATION OF [illegible]ONAL WITHIN THE LIMITATIONS IMPOSED BY DIM.'S AND REQUIREMENTS AS SPECIFIED HEREIN.

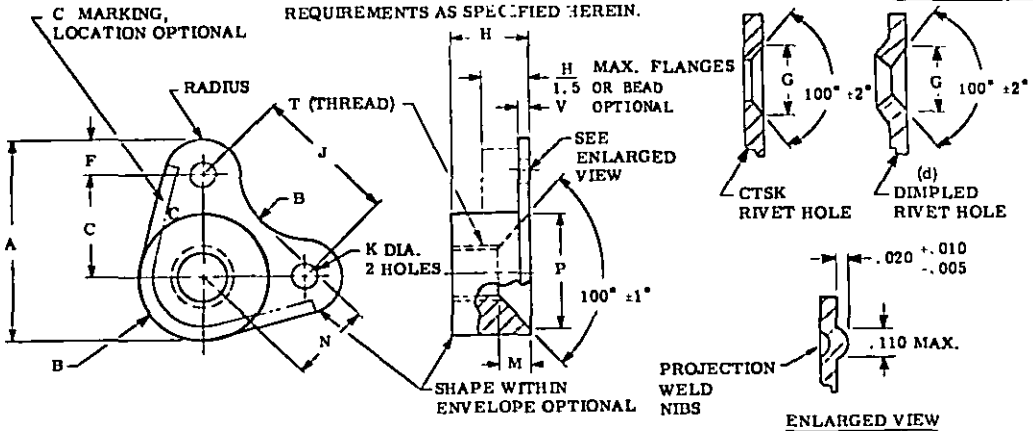

ENLARGED VIEW

T (a) THREAD SIZE	A MAX.	B MAX.	B MIN.	C ±.005	F MIN.	G DIA. ±.010	(b) H MAX.	(c) J ±.002	K DIA. +.005 -.000	M REF	N MAX.	P DIA. ±.005	V MAT'L MAX.	AXIAL STRENGTH LBS. MIN.	WEIGHT LBS/100 MAX.
.1640-32UNJC-3B	.700	.211	.180	.344	.100	.200	.272	.486	.098	.084	.270	.365	.047	1,720	.39
.1900-32UNJF-3B	.716	.227	.203	.344	.100	.200	.281	.486	.098	.093	.270	.411	.047	2,460	.41
.2500-28UNJF-3B	.955	.310	.267	.500	.100	.200	.340	.707	.098	.121	.383	.540	.055	4,580	.88
.3125-24UNJF-3B	1.044	.383	.340	.500	.125	.230	.422	.707	.130	.156	.383	.686	.065	7,390	1.17

(a) THREADS BEFORE LUBRICATION PER MIL-S-8879.
(b) MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS.
(c) CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005.
(d) DIMPLED HOLE TOLERANCE FOR "K" IS +.015, -.000 AFTER FORMING.

NOTES:

1. MATERIAL: CORROSION RESISTANT STEEL, (A286) AMS 5525, AMS 5735, OR AMS 5737.
2. PLATING: ONLY 800° F NUTS, SILVER PLATE IN ACCORDANCE WITH AMS 2410. PLATE THICKNESS, MEASURED ON ANY EXTERNAL SURFACE OF THE NUT, SHALL NOT BE LESS THAN 0.0002 IN; THREADS SHALL SHOW COMPLETE COVERAGE BUT THICKNESS REQUIREMENTS ON THREAD IS WAIVED. NO SILVER PLATE ON WELD NIBS.
3. MAGNETIC PERMEABILITY: SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH H = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR PER MIL-I-17214, OR EQUIVALENT.
4. HARDNESS: ROCKWELL C49 MAXIMUM.
5. LUBRICANT: ONLY 450° F NUTS, DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-N-25027. ~~FOR USAF APPLICATIONS, NUTS TREATED WITH DRY FILM LUBRICANTS SHALL NOT BE USED IN INTERNAL FUEL SYSTEMS.~~ (D)
6. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.
7. SURFACE ROUGHNESS IN ACCORDANCE WITH ASA B46.1-1962 (ANSI). UNLESS OTHERWISE SPECIFIED, THE SURFACE ROUGHNESS SHALL NOT EXCEED 125 MICRO INCHES.
8. PERFORMANCE: SEE PROCUREMENT SPECIFICATION, EXCEPT 450° F. DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES.
9. DESIGN AND USAGE LIMITATIONS: THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON A CROSS SECTIONAL AREA AT THE BASIC ROOT DIAMETER OF THE THREAD. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS. THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS 33588. ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED.

INTERCHANGEABILITY RELATIONSHIP: MS 21058 NUTS CAN UNIVERSALLY REPLACE NAS 685 NUTS OF LIKE MATERIAL, THREAD SIZE, PLATING, LUBRICANTS (SILVER PLATE OR DRY FILM LUBRICANT), RIVET SPACING, AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED, COUNTERSUNK RIVET HOLES OR PROJECTION WELDING). BUT NAS 685 NUTS CANNOT UNIVERSALLY REPLACE MS 21058 NUTS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) DENOTES CHANGES

APPROVED 23 JUL 64 — REVISED (A) 12 FEB 65 (B) 4 NOV 66 (C) 20 APR 71 (D) 15 MARCH 1978

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust ARMY - AV, USAF - 11	NUT, SELF-LOCKING, PLATE, CORNER, 100° CSK, LOW HEIGHT, CRES, 125 KSI FtU, 450° & 800° F	MS21058
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES: NAS 685	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) — PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. — PROJECT NO. 5310-0977 — STATE RD. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.

T THREAD SIZE	DASH NUMBERS					
	800° F			450° F		
	PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION	PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJECTION
.1640-32UNJC-3B	-08	-08K	-08W	L08	L08K	L08W
.1900-32UNJF-3B	-3	-3K	-3W	L3	L3K	L3W
.2500-28UNJF-3B	-4	-4K	-4W	L4	L4K	L4W
.3125-24UNJF-3B	-5	-5K	-5W	L5	L5K	L5W

EXAMPLE OF PART NUMBER:

MS21058 L4K

L4K — NUT DASH NUMBER

MS21058 — BASIC PART NUMBER

.2500-28UNJF-3B NUT, SELF LOCKING, CORNER, CRES, , 125 KSI, 450° F, DRY FILM LUBRICATED, WITH COUNTERSUNK OR DIMPLED RIVET HOLES.

INTERCHANGEABILITY TABLE	
CANCELED PART NUMBERS NAS685	SUBSTITUTIVE PART NUMBERS
NAS685 C08	MS21058-08
C08K	-08K
- - -	-08W
C08M	L08
C08MK	L08K
- - -	L08W
C3	-3
C3K	-3K
- - -	-3W
C3M	L3
C3MK	L3K
- - -	L3W
C4	-4
C4K	-4K
- - -	-4W
C4M	L4
C4MK	L4K
- - -	L4W
C5	-5
C5K	-5K
- - -	-5W
C5M	L5
C5MK	L5K
NAS685- - -	MS21058 L5W

USER SYMBOLS:
ARMY - EL, MI

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11
ARMY - AV
DSA - ES

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 JUL 64 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust ARMY - AV USAF - 11	TITLE NUT, SELF-LOCKING, PLATE, CORNER, 100° CSK, LOW HEIGHT, CRES, 125 KSI FTU, 450° & 800° F	MILITARY STANDARD MS21058
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES: NAS685	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.