REVIEWER SYMBOLS: AF - 99 DLA - IS

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 3120

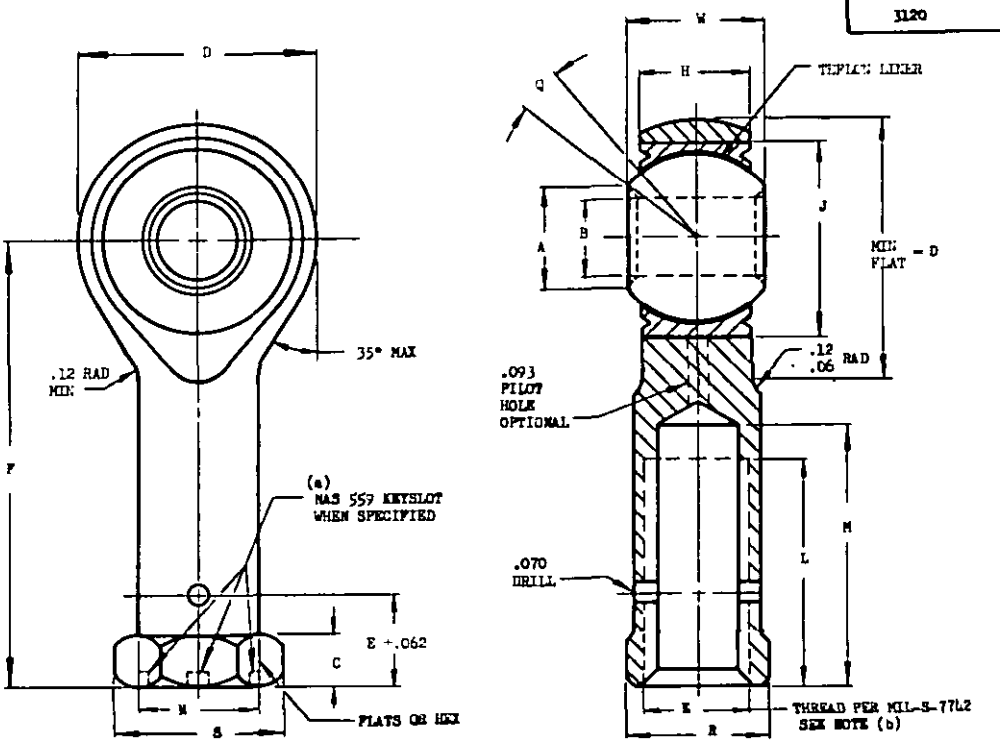


TABLE I

DASH NO.	B +.0000 -.0005	D DIA. ±.010	L COMPLETE THREAD MIN.	E THREAD SIZE UNF-3B	F ±.010	N CHANK DIA ±.010	W BALL WIDTH +.000 -.002	H BODY WIDTH ±.005	A MIN	J MAX	M MAX	C +.010 -.062	R +.002 -.010	Q° MIN	S REF ACROSS CORNERS OR DIA
-3	.1900	.806	.750	.3125-24	1.375	.422	.437	.337		..6250	.875	.188	.437	15	.500
-4	.2500				1.469										
-5	.3125	.900	.875	.3750-24	1.625	.485		.327	.36	..6875	1.000	.250	.500	14	.580
-6	.3750	1.025	1.000		1.812	.547	.500	.416	.47	..8125	1.125		.562	8	.660
-7	.4375	1.150	1.125	.4375-20	2.000	.610	.562	.452	.54	..9062	1.250		.625	10	.720
-8	.5000	1.337	1.250	.5000-20	2.250	.735	.625	.515	.61	1.0000	1.375		.750	9	.880
-10	.6250	1.525	1.375	.6250-18	2.500	.860	.750	.577	.75	1.1875	1.500	.375	.875	12	1.020
-12	.7500	1.775	1.625	.7500-16	2.875	.985	.875	.640	.85	1.3750	1.750		1.000	13	1.160
-14	.8750	2.025	1.875	.8750-14	3.375	1.110	.875	.765	1.00	1.6250	2.062	.500	1.125	6	1.300
-16	1.0000	2.775	2.125	1.2500-12	4.125	1.688	1.375	1.015	1.27	2.1250	2.312	.563	1.750	12	2.020

(a) WHEN SPECIFIED KEYSLOT SHALL BE IN ACCORDANCE WITH NAS 559.
(b) THREAD FORM AS PER MIL-S-7742 WILL BECOME INACTIVE AFTER MARCH 1970. AFTER MARCH 1970, THREAD FORM SHALL CONFORM TO MIL-S-8879.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© INACTIVE FOR NEW DESIGN AFTER 31 JAN 1978 USE MIL-B-81935/2.

SEE TABLE IV.

© DENOTES CHANGES

APPROVED 25 July 67 REVISED (A) 17 Mar 69 (B) 22 SEP 70 (C) 4 JUNE 82

P.A. Navy - AS Other Cust USAF - 11 ARMY - AV	TITLE BEARING, PLAIN, ROD END, SELF ALIGNING, TFE LINED, INTERNALLY THREADED	MILITARY STANDARD MS21243
PROCUREMENT SPECIFICATION MIL-B-8948	SUPERSEDES: MS21243(ASG)	SHEET 1 OF 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 3120-0524

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
AF - 99
DLA - IS
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

TABLE II

DASH NO.	OSCILLATING LOAD LB	ULTIMATE STATIC LOAD LB	FATIGUE LOAD LB	AXIAL PROOF LOAD LB	WEIGHT MAX LB	NO LOAD BREAKAWAY TORQUE IN/LBS MIN	MAX
-3	1470 (e)	2360	1470 (e)	1000	.080	.5	6
-4	3420	4860	2380	1000	.084		
-5	3590	7180	3020	3300	.102	1	10
-6	5120	9650	3570	3660	.161		
-7	6130	12000	4800	1850	.212		
-8	8570	19500	8260	2040	.325		
-10	10700	21900	9180	2430	.481		
-12	13200	29300	11600	2810	.673		
-14	16500	34500	13100	3320	.959	2	16
-16	26600	40300	30400	4340	2.717		

(e) BASED ON BOLT BENDING FATIGUE STRENGTH 180,000 PSI

MATERIAL:
BODY CODE
"C" CORROSION RESISTING STEEL, AMS 5643 (17-4PH) (INACTIVE, SEE INTERCHANGEABILITY TABLE III)
"S" ALLOY STEEL, MIL-S-5000 (4340)
BALL: AMS 5630, 440C
CARTRIDGE OUTER RING: AMS5643 (17-4PH), AMS 5528 (17-7), AISI 410
LINER: SEE PROCUREMENT SPEC.

PLATING: ALLOY STEEL, CADMIUM PLATING QQ-P-416, TYPE I, CLASS 2
HARDNESS:
ROD END BODY: 17-4PH, Rc 39-44
4340, Rc 39-42
PASSIVATION: CORROSION RESISTING STEEL, ROD END BODY QQ-P-35, TYPE II OR III
SURFACE FINISH:
ALL MACHINED SURFACES, RMR 125
HEAT TREATMENT: IN ACCORDANCE WITH MIL-H-6875
TEMPERATURE RANGE: -65°F to +250 °F
DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS ±.010, ANGLES ± ½°.
BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS.

EXAMPLE OF PART NUMBER: MS21243 X XX X X

- ADD L FOR LEFT HAND THREAD WHEN SPECIFIED.
- KEYWAY (CODE K) WHEN SPECIFIED
- BORE DIAMETER CODE IN MULTIPLES OF 1/16 INCH
- ROD END BODY MATERIAL CODE
- BASIC MS PART NUMBER

INTERCHANGEABILITY TABLE III

THE FOLLOWING DASH NUMBERS ARE INACTIVE AFTER 22 SEP 70 THE INACTIVE BEARINGS SHOULD BE USED FOR MAINTENANCE PURPOSES UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUBSTITUTIVE BEARINGS FOR NEW DESIGN.

DASH NUMBERS			
INACTIVE MS21243	SUBSTITUTIVE MS21243	INACTIVE MS21243	SUBSTITUTIVE MS21243
C3	S3	C8	S8
C4	S4	C10	S10
C5	S5	C12	S12
C6	S6	C14	S14
C7	S7	C16	S16

(C)

APPROVED 25 July 67 REVISED (C) FOR CHANGES SEE SHEET 1,2 & 3

P.A. Navy - AS Other Cust USAF - 11 ARMY - AV	TITLE BEARING, PLAIN, ROD END, SELF-ALIGNING, TYPE LINED, INTERNALLY THREADED	MILITARY STANDARD MS21243
PROCUREMENT SPECIFICATION MIL-B-6968	SUPERSEDES: MS21243(ASG)	SHEET 2 OF 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3120

TABLE IV

INTERCHANGEABILITY TABLE 1/	
INACTIVE FOR NEW DESIGN	SUPERSEDED BY
MS21243S3 S4 S5 S6 S7 S8 S10 S12 S14 MS21243S16	M81935/2-3 -4 -5 -6 -7 -8 -10 -12 -14 M81935/2-16

1/ INTERCHANGEABILITY RELATIONSHIP M81935/2 ITEMS CAN UNIVERSALLY REPLACE THE INACTIVE MS21243 ITEMS IDENTIFIED BY THE SAME DASH NUMBERS; BUT THE INACTIVE MS21243 ITEMS CANNOT ALWAYS REPLACE THE SUPERSEDING M81935/2 ITEMS.

REVIEWER SYMBOLS: AF - 99 DLA - IS

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Retention for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 25 JULY 67 REVISED © FOR CHANGES SEE SHEET 1,2 & 3

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE BEARING, PLAIN, ROD END, SELF ALIGNING, TFE LINED, INTERNALLY THREADED	MILITARY STANDARD MS21243
PROCUREMENT SPECIFICATION MIL-B-8948	SUPERSEDES MS21243(ASG)	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 23089

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.