
FED. SUP. CLASS
5340

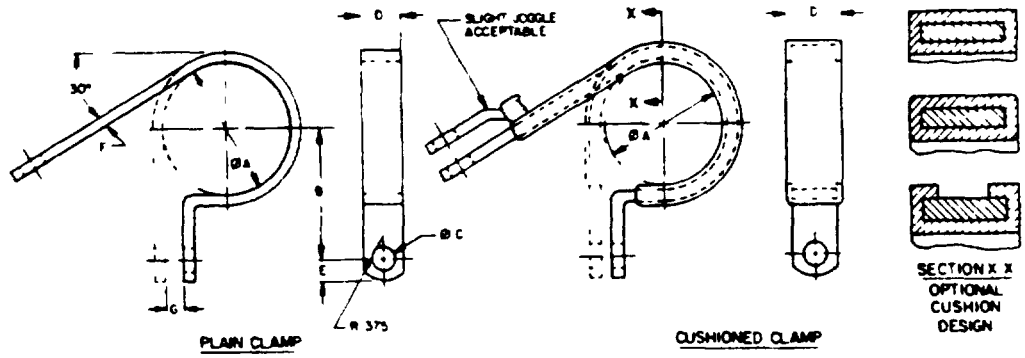

PLAIN CLAMP

CUSHIONED CLAMP

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER		ØA	B		ØC	D		E	F	G	RECOMMENDED NOMINAL FASTENER SIZE
PLAIN	CUSHIONED	NOM	PLAIN	CUSHIONED		PLAIN	CUSHIONED				
-1	-65	125	344	406							
-2	-66	188	375	438							
-3	-67	250	406	469							
-4	-68	312	438	500							
-5	-69	375	469	531							
-6	-70	438	500	562							
-7	-71	500	531	594							
-8	-72	562	562	625						062	
-9	-73	625	594	656							
-10	-74	688	625	688							
-11	-75	750	656	719							
-12	-76	875	719	781					031		
-13	-77	1 000	781	844							
-14	-78	1 125	844	906							
-15	-79	1 250	906	969							
-16	-80	1 375	969	1 031	.203			219			190
-17	-81	1 500	1 031	1 094						094	
-18	-82	1 625	1 094	1 156							
-19	-83	1 750	1 156	1 219							
-20	-84	1 875	1 219	1 281							
-21	-85	2 000	1 281	1 344		500	625				
-22	-86	2 125	1 344	1 406							
-23	-87	2 250	1 406	1 469							
-24	-88	2 375	1 469	1 531							
-25	-89	2 500	1 531	1 594							
-26	-90	2 750	1 656	1 719					040	125	
-27	-91	3 000	1 781	1 844							
-28	-92	3 250	1 906	1 969							
-29	-93	3 500	2 031	2 094							
-30	-94	3 750	2 156	2 219							
-31	-95	4 000	2 281	2 344							
-32	-96	125	469	531							
-33	-97	188	469	531							
-34	-98	250	500	562							
-35	-99	312	531	594							
-36	-100	375	562	625							
-37	-101	438	594	656	281			250	032	062	250
-38	-102	500	625	688							
-39	-103	562	656	719							
-40	-104	625	688	.750							
-41	-105	750	750	812							
-42	-106	875	812	875							
-43	-107	1 000	875	938							

(F) ENTIRE STANDARD REVISED

REVISED (F) 6 NOV 1987

APPROVED 19 JAN 61

PA: ARMY-AR
Other Cust: NAVY-YD, AIR FORCE-99

INTERNATIONAL INTEREST:

TITLE: CLAMP, LOOP-STEEL, PLAIN AND CUSHIONED

MILITARY STANDARD
MS21333

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES: CMDX2, CMDX2 1, CMDX2 2, CMDX2 3, MK4 101, MK4 121, MK4 121A, MK4 121B, MK4 121C

PAGE 1 OF 2

DD FORM 672-1 COORDINATED

5340-1714

REVIEWER ACTIVITIES
ARMY-AV, MI
AIR FORCE-82
DLA-IS

USER ACTIVITIES
ARMY-ER
NAVY-SA, SH, MC

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all new engineering and design applications and for repetitive use shall be made from the document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.

FSC SUP CLASS
5340

TABLE I. DASH NUMBERS AND DIMENSIONS-CONTINUED

DASH NUMBER		∠A	B		∠C	D		E	F	G	RECOMMENDED NOMINAL FASTENER SIZE
PLAIN	CUSHIONED	NOM	PLAIN	CUSHIONED		PLAIN	CUSHIONED				
-44	-108	125	500	562							
-45	-109	250	531	594							
-46	-110	312	562	625							
-47	-111	375	594	656							
-48	-112	500	656	719	344	562	688	281			312
-49	-113	625	719	781							
-50	-114	750	781	844							
-51	-115	875	844	906							
-52	-116	1 188	1 000	1 062							
									032	062	
-53	-117	125	562	625							
-54	-118	188	562	625							
-55	-119	250	594	656							
-56	-120	312	625	688							
-57	-121	375	656	719							
-58	-122	438	688	750	406	625	750	343			375
-59	-123	500	719	781							
-60	-124	562	750	812							
-61	-125	625	78	844							
-62	-126	750	844	906							
-63	-127	875	906	969							
-64	-128	1 000	969	1 031							
	-129	1 250		1 094							

REQUIREMENTS

1 MATERIAL BASE-STEEL, CARBON GRADES 1005 (UNS G10050) THRU 1020 (UNS G10200) TEMPER HALF-HARD, QUARTER HARD, SKIN-PASSED OR DEAD-SOFT IN ACCORDANCE WITH ASTM A109 CUSHION-SYNTHETIC RUBBER IN ACCORDANCE WITH MIL-R-3065, GRADE SCS.5A,B,L,L_3F_2 OR PLASTISOL IN ACCORDANCE WITH MIL-P-20689 062 INCHES THICK OR 032 INCHES THICK

2 PROTECTIVE COATING AND SURFACE TREATMENT STEEL, CARBON, SHALL BE CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3 OR ZINC COATED IN ACCORDANCE WITH ASTM B633 Fe/Zn 8, TYPE II

3 EDGES CLAMPS SHALL BE FREE OF BURRS AND SHARP EDGES, 010R MAX

4 TOLERANCES FOR LINEAR DIMENSIONS ± 010 ANGULAR DIMENSIONS ±5°

5 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I AND WHEN APPLICABLE A CUSHION MATERIAL CODE

CUSHION MATERIAL CODE
A- PLASTISOL 032 INCH THICK
NO CODE - PLASTISOL 062 INCH THICK OR SYNTHETIC RUBBER

EXAMPLE MS21333-66A
- CUSHION MATERIAL CODE
- DASH NUMBER
- BASIC MS NUMBER

MS21333-66A INDICATES CLAMP, LOOP-STEEL, CUSHIONED, 188 NOMINAL DIAMETER PLASTISOL CUSHION 032 INCHES THICK

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

APPROVED 19 JAN 61 REVISED (F) FOR CHANGES SEE PAGES 1 AND 2

PA ARMY-AR | INTERNATIONAL INTEREST | TITLE

CLAMP, LOOP-STEEL, PLAIN AND CUSHIONED

MILITARY STANDARD

MS21333

Oper Cust
NAVY-YD
AIR FORCE-99

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES
CMDX2 CMDX2 1, CMDX2 2 CMDX2 3, MK4 101, MK4 121, MK4 121A, MK4 121B, MK4 121C

PAGE 2 OF 2

DD FORM 672-1 (OBSOLETE)

5340-1714

REVIEWER ACTIVITIES
ARMY-AV, MI
AIR FORCE-82
DLA-IS

USER ACTIVITIES
ARMY-ER
NAVY-SA, SH, MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:32Z
Check the source to verify that this is the current version before use.