
FED. SUP CLASS
5310

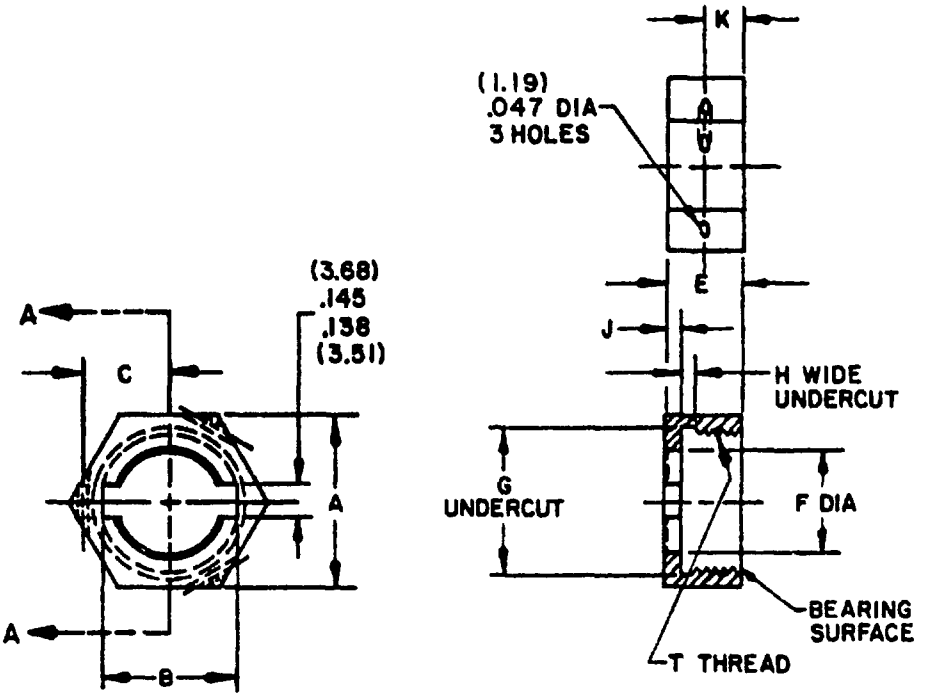

SECTION A - A

T Thread	A Min	A Max	B Min	B Max	C Min	C Max	E Min	E Max
.469-32-NS-2B (11.91)	.620 (15.75)	.630 (16.00)	.385 (9.78)	.395 (10.03)	.280 (7.11)	.295 (7.49)	.205 (5.21)	.210 (5.33)
.625-24-UNEF-2B (15.88)	.740 (18.80)	.817 (20.75)	.525 (13.34)	.583 (14.81)	.362 (9.19)	.388 (9.86)	.309 (7.85)	.320 (8.13)

F Min	F Max	G Min	G Max	H Min	H Max	J Min	J Max	K Min	K Max
.325 (8.26)	.331 (8.41)	.469 (11.91)	.474 (12.04)	.062 (1.57)	.072 (1.83)	.044 (1.12)	.050 (1.27)	.098 (2.49)	.110 (2.79)
.432 (10.97)	.442 (11.23)	.635 (16.13)	.640 (16.26)	.057 (1.45)	.067 (1.70)	.058 (1.47)	.067 (1.70)	.122 (3.10)	.142 (3.61)

(A) DENOTES CHANGE

APPROVED 10 JAN 75 REVISED (A) 7 SEP 1976

This military standard is approved for use by Aeronautical Systems Division, AFSC (11), and (Department of the AF) and is available for use by all Departments and Agencies of the Department of Defense.

P.A AF-11	International Interest	TITLE	MILITARY STANDARD
Other Cust		NUT, PLAIN, HEXAGON-AZIMUTH (WITH LOCKWIRE HOLES)	MS21392 (USAF)
Procurement Specification FF-N-836		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 75 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-F011

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:38Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm.
3. Metric equivalents are in parentheses.
4 Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .02 (.51 mm) for two place decimals.
5 Threads: Threads shall conform to handbook H28
(A) 6 Break all sharp edges and remove all burrs.
7. Bearing surface: The diameter of the circle of the bearing surface shall be the maximum across the flats dimension within a tolerance of minus three percent. The bearing surface shall be perpendicular to the axis within 2 degrees for nuts .625 (15.88) inch and smaller and a degree for nuts larger than .625 (15.88) inch

Certain provisions: (The dimension across the wrenching flats) of this standard are the subject of international standardization agreement ASCC AIR STD 17/2. When revision or cancellation of this standard is proposed which will affect or violate the international agreement concern, the preparing activity will take appropriate reconciliation action through international standardization channels, including department standardization offices, if required.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9 Referenced documents shall be of the issue in effect on date of invitation for bid
(A) 10. Material: Steel, FED-STD No. 66, 55000 PSI.
Brass, QQ-B-626, copper alloy No 360, 1/2 hard.
Corrosion resisting steel, QQ-S-763-300 series.
(A) 11 Finish: Nickel plate per QQ-N-290, class 1 grade F with copper underplate
Black oxide, MIL-F-495.
Corrosion resisting, passivated per QQ-P-35
Cadmium plate, QQ-P-416, type II, class 2

(A)

T Thread	Dash number			
	Steel Nickel plated	Brass Oxide plated	CRES	Steel Cad. plated
.469-32-NS-2B (11.91)	-01	-11	-21	-31
.625-24-UNEF-2B (15.88)	-02	-12	-22	-32

☆U S GOVERNMENT PRINTING OFFICE 1976—603-766/6702

APPROVED 10 JAN 75 REVISED (A) FOR CHANGES SEE PAGES 1&2

This military standard is approved for use by Aeronautical Systems Division, AFSC (11), and (Department of the AF) and is available for use by all Departments and Agencies of the Department of Defense.

P.A AF-11	International interest	TITLE	MILITARY STANDARD
Other Cust		NUT, PLAIN, HEXAGON-AZIMUTH (WITH LOCKWIRE HOLES)	MS21392 (USAF)
Procurement Specification FF-N-836		SUPERSEDES:	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:38Z
Check the source to verify that this is the current version before use.