This standard has been approved by the BuWep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

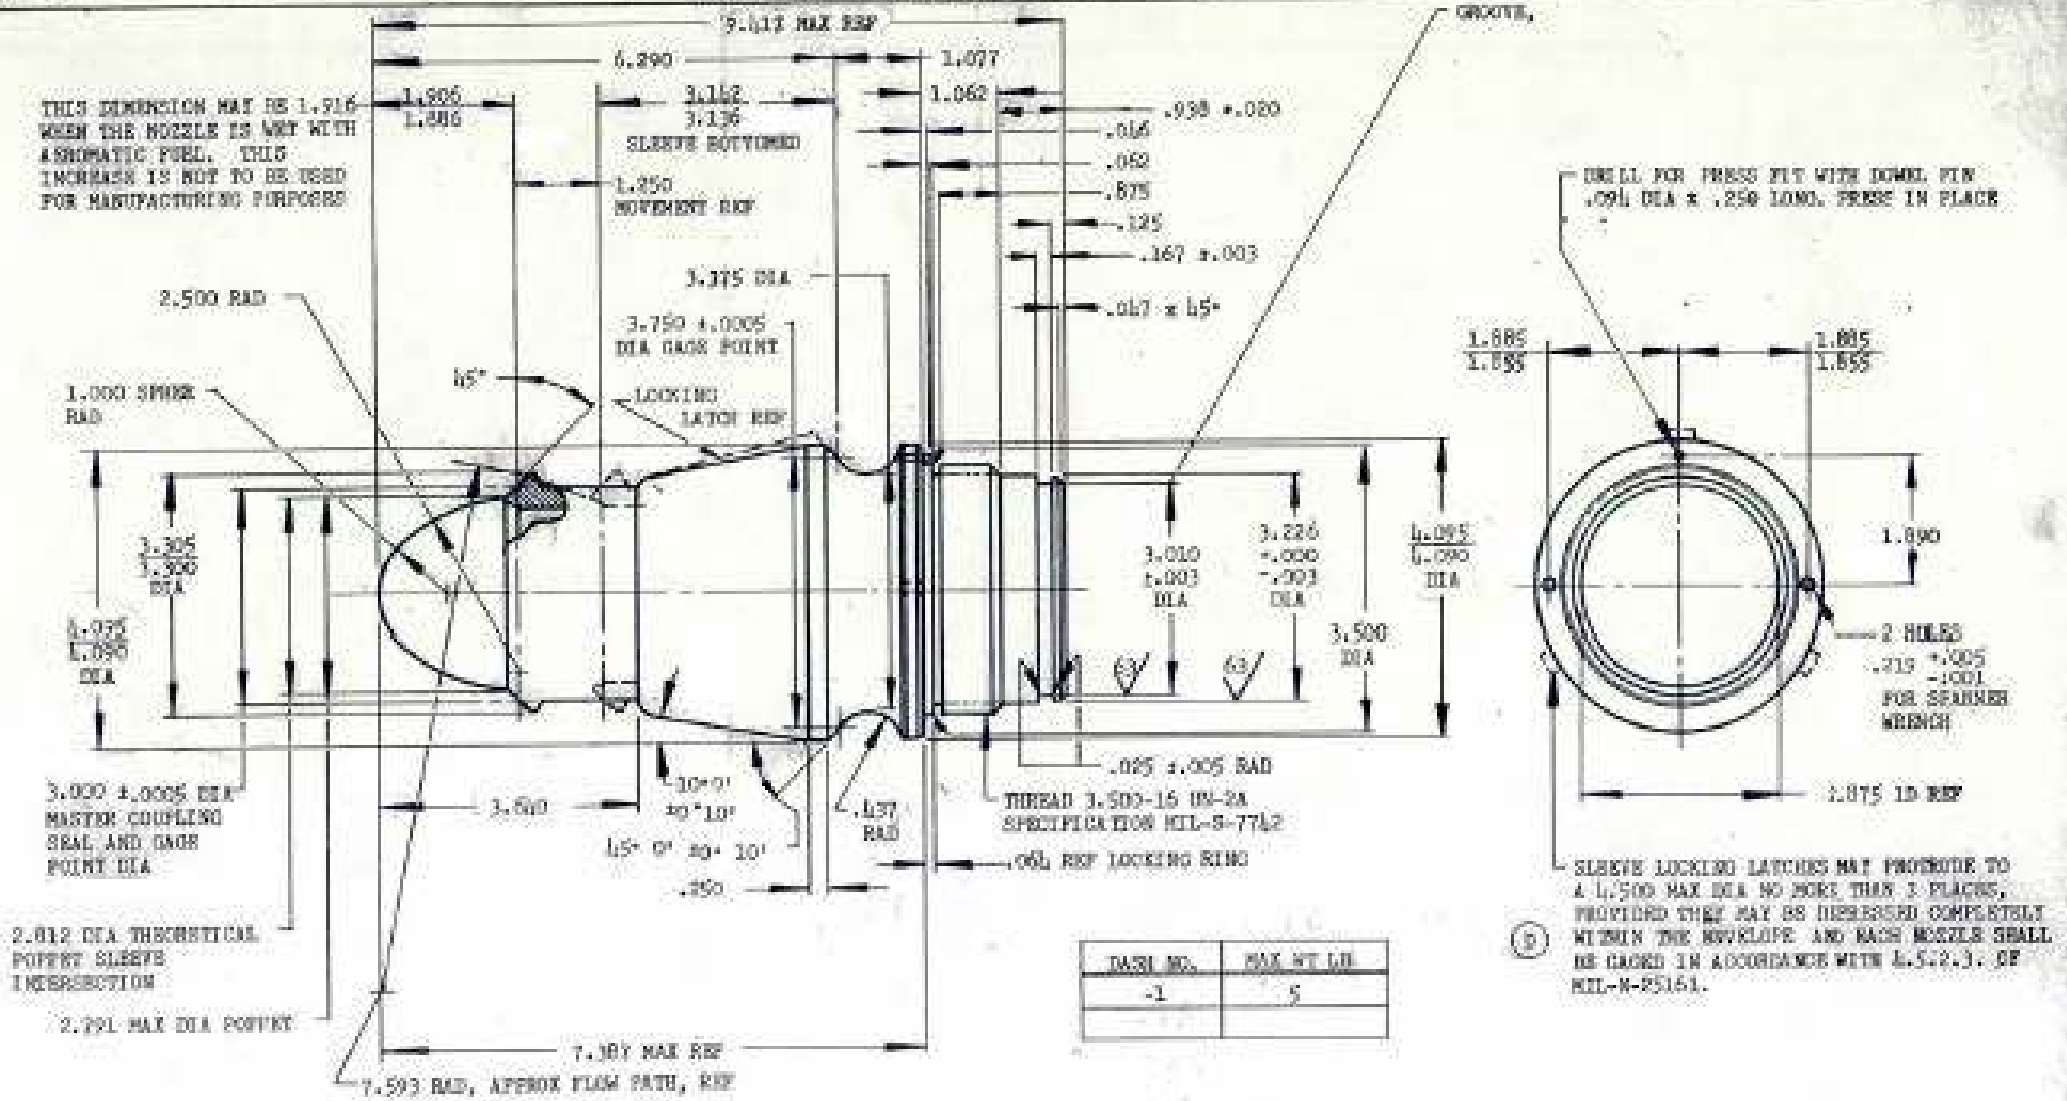
9.417 MAX REF
6.290
1.077
1.062
3.142
3.136
SLEEVE BOTTOMED
1.906
1.886
.938 ±.020
.016
.062
.875
.125
.167 ±.003
.047 x 45°
THIS DIMENSION MAY BE 1.916 WHEN THE NOZZLE IS WET WITH AROMATIC FUEL. THIS INCREASE IS NOT TO BE USED FOR MANUFACTURING PURPOSES
1.250 MOVEMENT REF
3.375 DIA
3.750 ±.0005 DIA GAGE POINT
LOCKING LATCH REF
2.500 RAD
45°
1.000 SPHER RAD
GROOVE,
3.305 3.300 DIA
4.095 4.090 DIA
3.010 ±.003 DIA
3.226 +.000 -.003 DIA
4.095 4.090 DIA
3.500 DIA
63
63
3.000 ±.0005 DIA MASTER COUPLING SEAL AND GAGE POINT DIA
3.640
10°0' ±0°10'
45° 0' ±0° 10'
.250
.437 RAD
.025 ±.005 RAD
THREAD 3.500-16 UN-2A SPECIFICATION MIL-S-7742
.064 REF LOCKING RING
2.812 DIA THEORETICAL POPPET SLEEVE INTERSECTION
2.291 MAX DIA POPPET
7.387 MAX REF
7.593 RAD, APPROX FLOW PATH, REF
DRILL FOR PRESS FIT WITH DOWEL PIN .094 DIA x .250 LONG. PRESS IN PLACE
1.885 1.855
1.885 1.855
1.890
2 HOLES .219 +.005 -.001 FOR SPANNER WRENCH
1.875 ID REF
SLEEVE LOCKING LATCHES MAY PROTRUDE TO A 4.500 MAX DIA NO MORE THAN 3 PLACES, PROVIDED THEY MAY BE DEPRESSED COMPLETELY WITHIN THE ENVELOPE AND EACH NOZZLE SHALL BE GAGED IN ACCORDANCE WITH 4.5.2.3. OF MIL-N-25161.
Ⓓ

DASH NO.	MAX WT LB
-1	5

WHERE SPECIFIED, SURFACE ROUGHNESS $\sqrt{63}$, MIL-STD-10.

REMOVE ALL BURRS AND BREAK SHARP EDGES .010 TO .020.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

AT ASSEMBLY WHERE NOZZLE IS THREADED INTO THE PROBE MAST NOSE, MS25359, LOCK SECURELY IN PLACE WITH THE LOCK RING, MS21360-1, 1 REQUIRED.

FOR USE WITH COUPLING MS24355-1.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/29. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FED. SUP CLASS
1680

APPROVED 18 May 56 REVISED Ⓐ 25 Jan 57 Ⓑ 1 Mar 57 Ⓒ 15 May 61 Ⓓ 12 Feb 63

P.A. USAF - AFSC Other Cust Navy - Wep	INTERNATIONAL INTEREST	TITLE NOZZLE - TYPE MA-2, FLIGHT PRESSURE REFUELING
PROCUREMENT SPECIFICATION MIL-N-25161		

MILITARY STANDARD

MS24356(ASG)

SHEET 1 OF 1

DD FORM 672-1 1 SEP 57 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:52Z
Check the source to verify that this is the current version before use.