
FED. SUP CLASS.
6620

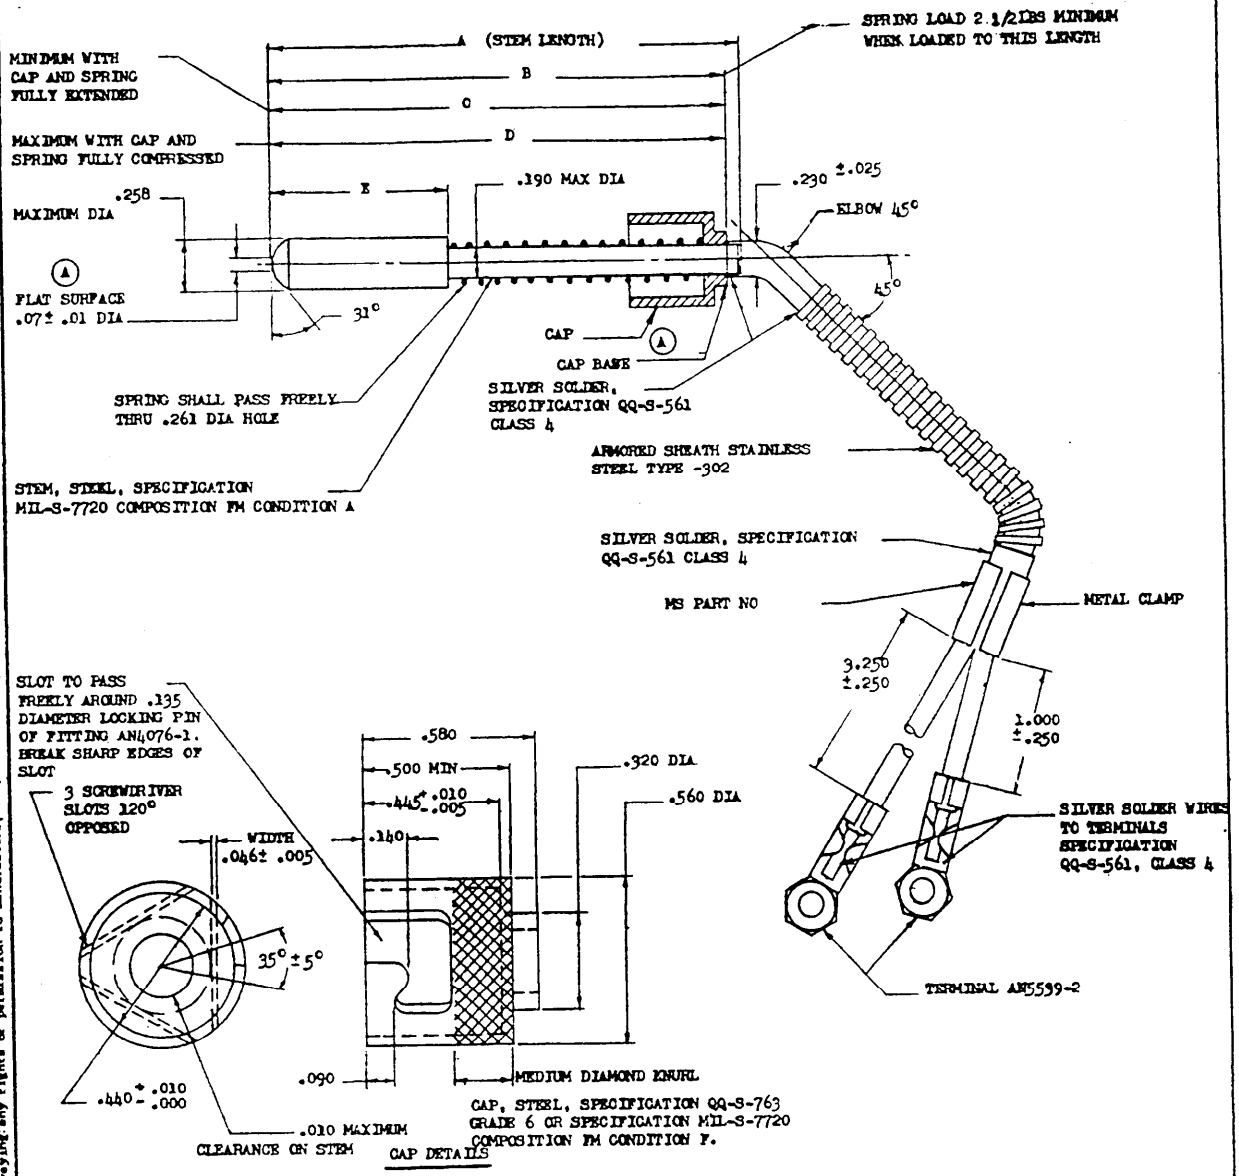

MS PART NO	FIIN	A	B	C	D	E
MS24482-1		2.850 ±.030	2.50	2.62	1.78	1.00 MAX
MS24482-2		2.209 ±.016	2.00	2.06	1.63	0.76 MAX

OVERALL LENGTH: 15.00± .50 FROM TIP OF BULB TO DISCONNECT ASSEMBLY ON LONGEST LEAD.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: TWO PLACE DECIMALS ± .02, THREE PLACE DECIMALS ± .010, ANGLES 1°.

APPROVED 9 AUG 57 REVISED (A) 22 April 1958

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.
Navy - BuAer Air Force	A - N - AF -

MILITARY STANDARD

TRANSMITTER; TEMPERATURE, ELECTRICAL RESISTANCE, ARMORED, BAYONET LOCKING TYPE. (-50°C TO 300°C)

MS24482(USAF)

PROCUREMENT SPECIFICATION
MIL-T-25446

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 WADC

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:55Z
Check the source to verify that this is the current version before use.