


FED SUP CLASS
5355

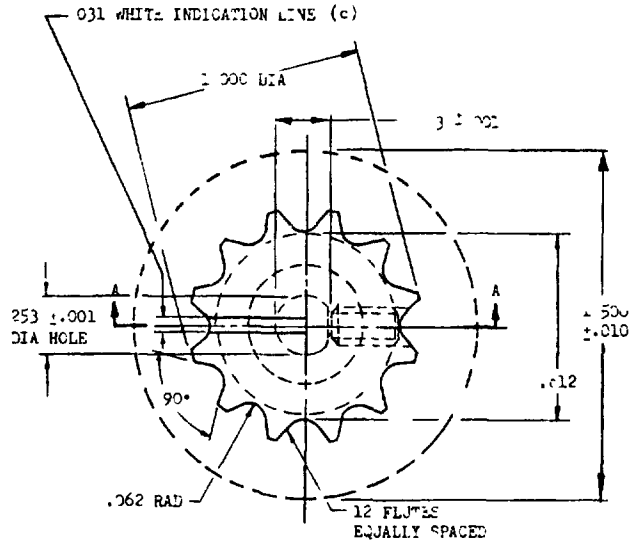

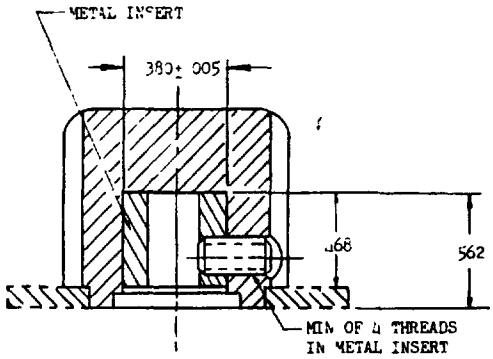

ALTERNATE
SECTION A-A
SHOWING PLASTIC KNOB
WITH METAL INSERT

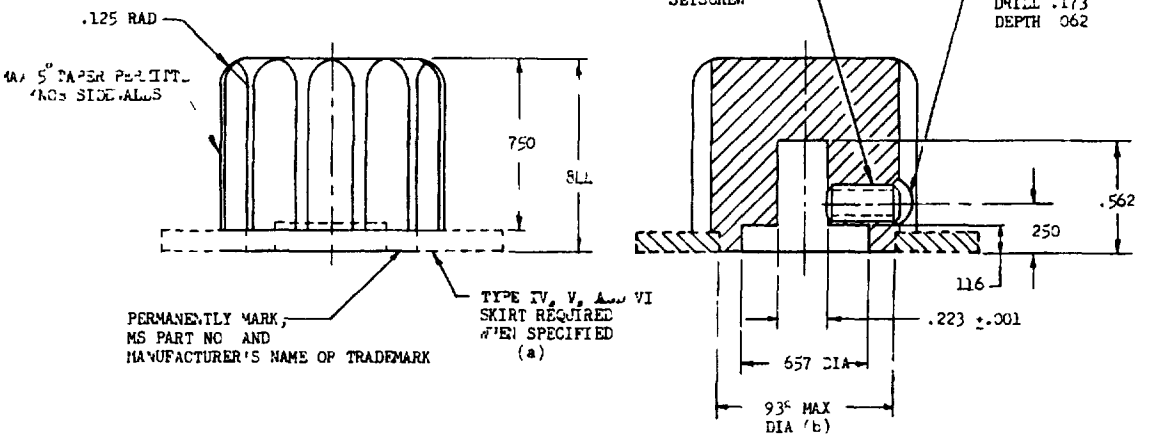

SECTION A-A

SHOWING ALL METAL KNOB

(d) DASH NUMBER	(a) KNOB FORM	MATERIAL
-1	WITHOUT SKIRT	METAL
P1	WITHOUT SKIRT	PLASTIC
-2	WITH TYPE V SKIRT	METAL
P2	WITH TYPE V SKIRT	PLASTIC
-3	WITH TYPE VI SKIRT	METAL
P3	WITH TYPE VI SKIRT	PLASTIC
-4	WITH TYPE VII SKIRT	METAL
P4	WITH TYPE VII SKIRT	PLASTIC

REFER TO SHEET 2 FOR GENERAL NOTES

(F) FOR CHANGES SEE SHEETS 1 AND 2.

P A Navy - WP Other Cust USAF - 11	TITLE KNOB, ROUND	MILITARY STANDARD MS25168 (ASG)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 1 OF 2

APPROVED 6 Jul 55 REVISED (A) 10 Oct 55 (B) 7 Oct 57 (C) 19 Oct 59 (D) 31 Aug 60 (E) 24 Nov 64 (F) 27 Dec 65

Reviewers
Navy - WP
USAF - 11
DISC

This standard has been approved by the Bureau of Naval Weapons (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

(a) FOR SKIRT TYPES SEE MS25164.
(b) DIAMETER DIMENSION OF KNOB WITHOUT SKIRT.
(c) POINTER INDICATION ON SKIRTS SHALL BE LOCATED OPPOSITE TO AND ON CENTERLINE OF KNOB SETSCREW. THE WHITE OF THE LINE SHALL BE A MAT WHITE WITH MATERIAL HAVING A REFLECTANCE OF NO LESS THAN 80 PERCENT. CONTRAST OF THE WHITE LINE AND GRAY OR BLACK COATING SHALL BE AS SPECIFIED IN MIL-P-7788.
SKIRT WHEN SPECIFIED, SHALL BE ASSEMBLED TO KNOB BY MECHANICAL OR ADHESIVE METHODS OR THE SKIRT AND KNOB SHALL BE FORMED IN ONE PIECE.
KNOB EDGES SHALL BE HONED TO AN APPROXIMATE RADIUS OF .03.
(d) SCREWS SELFLOCKING FEATURE IN ACCORDANCE WITH MIL-F-18240.

MATERIAL
INSERT BRASS, QQ-B-613, COMPOSITION B, HALF HARD.
KNOB AND SKIRT, CLEAR TRANSPARENT PLASTIC OR CORROSION RESISTANT METAL

FINISH
INSERT; CADMIUM PLATE, SPEC QQ-P-416, TYPE II CLASS A PERMITTED
KNOB AND SKIRT, THE ENTIRE OUTER SURFACE, EXCEPT FOR THE BOTTOM SURFACE AND ANY REQUIRED INDEX MARKINGS SHALL BE COATED DARK GULL GRAY OR BLACK MAT MATERIAL HAVING A COLOR CONFORMING TO ONE OF THE COLOR NUMBERS IN ACCORDANCE WITH FED STD 595 SHOWN IN THE COLOR CODE TABLE

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS -.016.

ADD P IN PLACE OF DASH TO INDICATE PLASTIC KNOB.
ADD CODE LETTER TO INDICATE COLOR OF SKIRT AND KNOB AFTER DASH NUMBER DESIGNATING SKIRT TYPE

(F)

CODE	COLOR NAME	COLOR FED STD 595	(c) INDICATION LINE
A	DARK GULL GRAY	36231	WITH INDICATION LINE
B	BLACK	37038	
E	DARK GULL GRAY KNOB WITH BLACK SKIRT	36231 37038	WITH INDICATION LINE
C	DARK GULL GRAY	36231	WITHOUT INDICATION LINE
D	BLACK	37038	
F	DARK GULL GRAY KNOB WITH BLACK SKIRT	36231 37038	WITHOUT INDICATION LINE

EXAMPLE OF PART NOS MS25168-1A = METAL KNOB WITHOUT SKIRT, DARK GULL GRAY, WITH INDICATION LINE
(F) MS25168P4C = PLASTIC KNOB, TYPE VII SKIRT, DARK GULL GRAY, WITHOUT INDICATION LINE
MS25168P4E = PLASTIC KNOB, DARK GULL GRAY WITH TYPE VII BLACK SKIRT, WITH INDICATION LINE

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

APPROVED REVISED (F) FOR CHANGES SEE SHEETS 1 AND 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.