USER SYMBOLS:
NAVY-MC, SL

REVIEWER SYMBOLS:
USAF - 11 17 99
NAVY - EC
ARMY -
OTHER -

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
5999

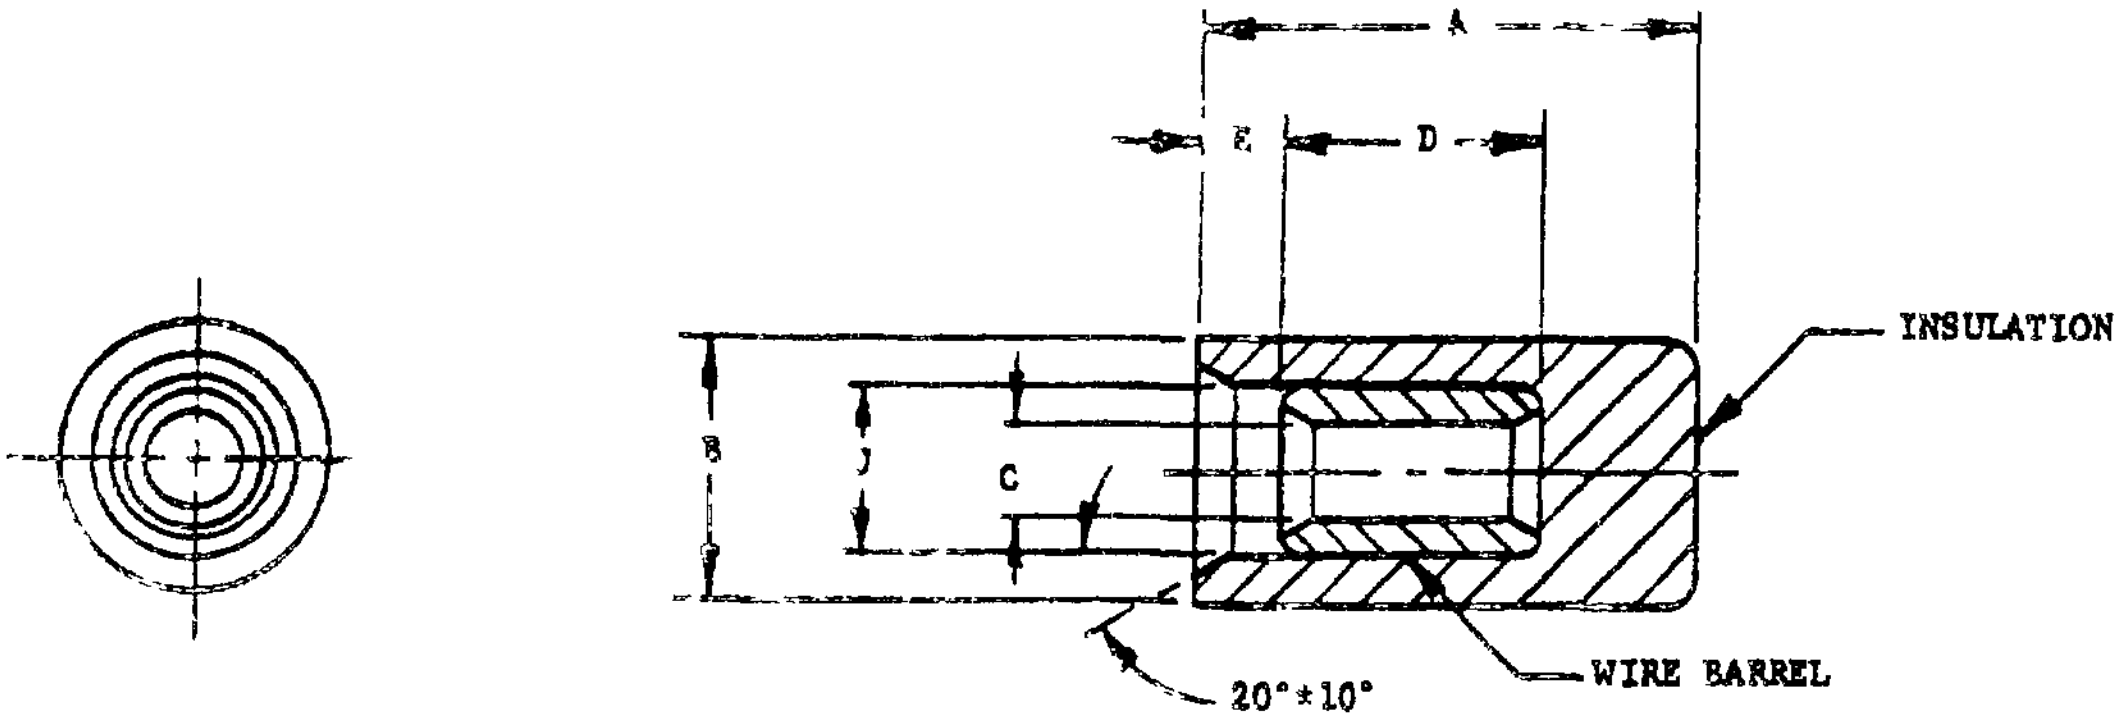

Ⓖ

DASH NO	WIRE SIZE	A MAX	B MAX	C MAX	C MIN	D MAX	E MIN	J MAX	COLOR CODE	MIN TENSILE VALUES LBS	MIN TENSILE VALUES Kg-METER
-1	26-24	400	215	035	027	305	082	145	YELLOW	5 0	0.6915
-2	22-18		215	064	050			145	RED	15 0	2 0745
-3	16-14		245	090	080			170	BLUE	25 0	3 4575
-4	12-10		315	140	129	345		229	YELLOW	35 0	4 8405

REQUIREMENTS

1 MATERIAL METAL SLEEVE SOFT COPPER, QQ-C-502, CLASS A, BRONZE, COMMERCIAL, ASTMB140 ALLOY B, OR SINTERED BRASS MIL-B-12128, COMPOSITION 3, CLASS A, OR ASTM B-282-60 CLASS A
Ⓖ INSULATING SLEEVE THERMOPLASTIC (NYLON OR POLYETHYLENE)

2 FINISH METAL SLEEVE TIN PLATED, SEE ACQUISITION SPECIFICATION

3 CONTOUR MAY VARY FROM THAT SHOWN

4 TENSILE STRENGTH TEST MECHANICAL CONNECTION OF WIRE BARREL AND INSULATOR TO CONDUCTOR SHALL MEET MINIMUM TENSILE REQUIREMENTS THE INSULATING SLEEVE SHALL NOT SLIP MORE THAN 031 AT THESE VALUES Ⓖ

5 QUALIFICATION FOR QUALIFICATION, END CAPS SHALL BE SUBJECTED TO TEST GROUPS I, IV, V VII AND VIII OF TABLE V SPECIFIED IN MIL-T-7928 AND MINIMUM TENSILE VALUES SHOWN ABOVE END CAPS SHALL BE TESTED WITH MIL-W-5086 MIL-W-16878, MIL-W-22759/1, MIL-W-22759/9, MIL-W-22759/11, MIL-W-81381/1 MIL-W-81381/3 OR MIL-W-81381/7 WIRE, AND TOOLING AS FOLLOWS

Ⓖ MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 DIES INSTALLED FOR SIZES 26 THRU 10 END CAPS, OR MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED FOR SIZES 26 THRU 14 END CAPS AND MIL-C-22520/10-100 DIES INSTALLED FOR SIZES 12 THRU 10 END CAPS EXISTING MS90413 AND MS3316 TOOLS IN THE FIELD MAY BE USED UNTIL WORN OUT

NOTES

1 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

2 METRIC EQUIVALENTS (TO THE NEAREST 01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25 4 mm

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

Ⓖ STANDARD REVISED

APPROVED 16 May 58 REVISED Ⓕ 7 DEC 73 Ⓖ 15 July 82

P.A NAVY-AS Other Cust USAF - 85 ARMY - ER	TITLE CAP, ELECTRICAL (WIRE END, CRIMP STYLE, TYPE II, CLASS 1) FOR 105°C TOTAL CONDUCTOR TEMPERATURE	MILITARY STANDARD MS25274
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES	SHEET 1 OF 2

DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 21635

PROJECT NO 5999-0126

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DOD 1S."

REVIEWER SYMBOLS:
USAF - 11 17, 99
NAVY - EC
ARMY -
OTHER -

USER SYMBOLS:
NAVY-MC, SH

FED SUP CLASS
5999

Ⓖ

INCH	mm
027	0.69
031	0.79
035	0.89
050	1.27
064	1.63
080	2.03
082	2.08
090	2.24
129	3.28
140	3.56

INCH	mm
145	3.68
170	4.32
215	5.46
229	5.82
245	6.22
305	7.75
315	8.00
345	8.76
480	12.19

APPROVED 16 MAY 58 REVISED Ⓖ FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust USAF - 85 ARMY - ER	TITLE CAP, ELECTRICAL (WIRE END, CRIMP STYLE, TYPE II CLASS 1) FOR 105°C TOTAL CONDUCTOR TEMPERATURE	**MILITARY STANDARD** **MS 25274**
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 78 672-1 (Supersedes)

PLATE NO [illegible]