| | |
|---|---|
| FED SUP CLASS | 5935 |

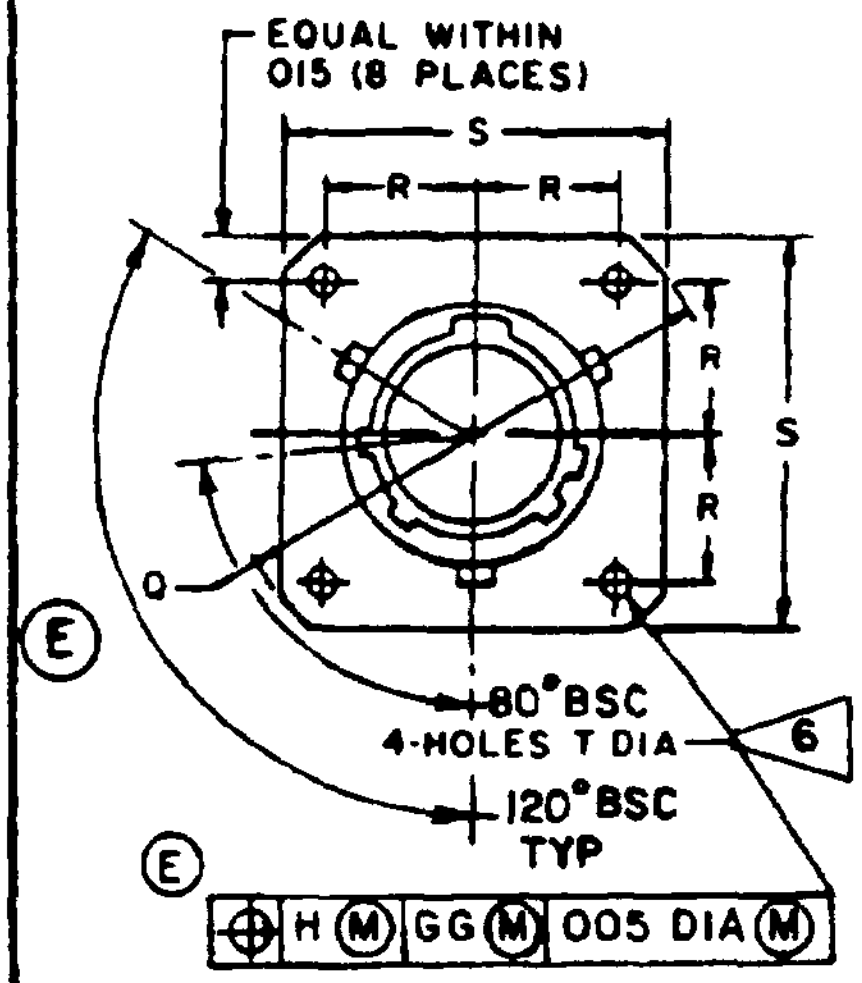

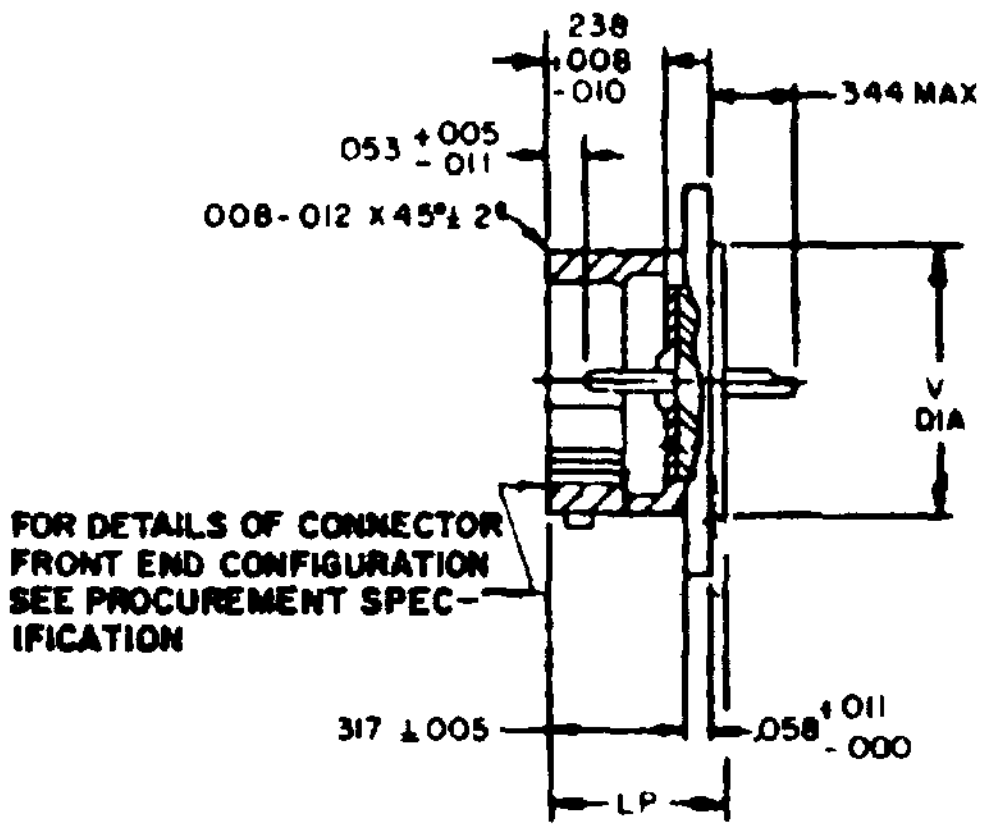

STYLE P

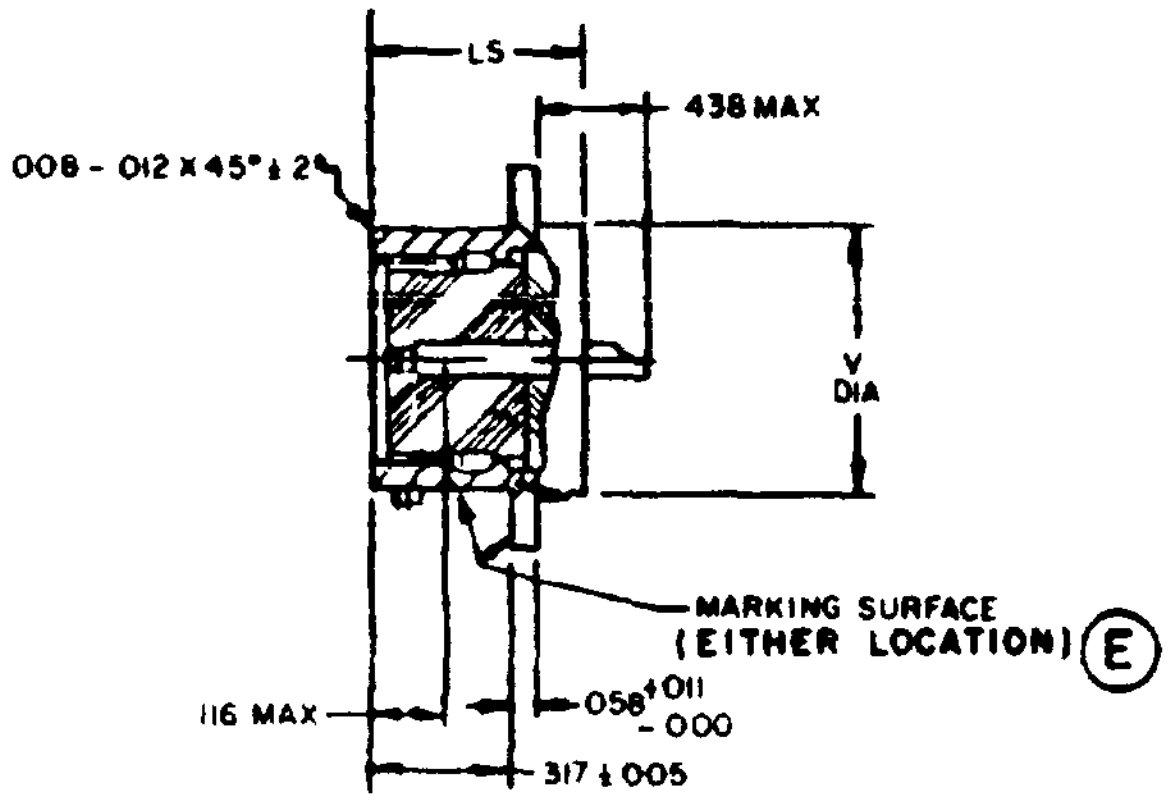

STYLE S

CLASS Y

EXAMPLE OF PART NUMBER

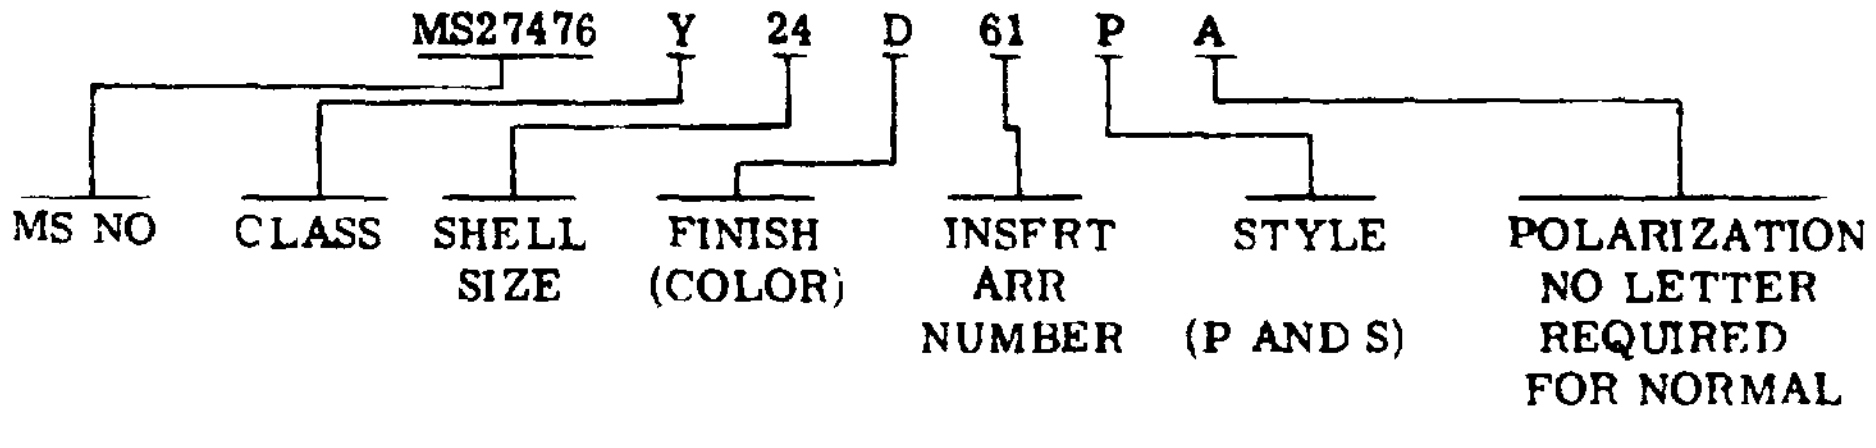

Ⓔ FOR CHANGES SEE SHEETS 1 & 2

APPROVED 8 SEP 66 REVISED Ⓓ 13 AUG 74 Ⓔ 2 JAN 1976

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities
Army - MI MU
Navy - EC MC OS
Air Force - 11 15 17 80
DSA - ES

User activities

| | | | |
|---|---|---|---|
| PA AF-85<br>Other Cust<br>ARMY-EL<br>NAVY-AS | International interest | TITLE<br>CONNECTOR, RECEPTACLE, ELECTRICAL<br>BOX MOUNTING, SOLDER TYPE,<br>HERMETIC SEAL, SERIES II. | MILITARY STANDARD<br>MS27476 |
| Procurement Specification<br>MIL-C-38999 | | SUPERSEDES MS27476 (USAF) | SHEET 1 OF 2 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

| SHELL SIZE | LP MAX | LS MAX | Q MAX DIA | R BSC | S MAX | T + 010 - 005 | V + 001 - 005 DIA |
|---|---|---|---|---|---|---|---|
| 8 | 453 | .562 | 1 078 | 297 | .828 | 120 | 562 |
| 10 | | | 1 266 | 3595 | 954 | | 672 |
| 12 | | | 1 391 | 406 | 1 047 | | 781 |
| 14 | | | 1 516 | 453 | 1 141 | | .906 |
| 16 | | | 1.641 | 4845 | 1 234 | | 1 031 |
| 18 | | | 1 766 | 531 | 1 328 | | 1 156 |
| 20 | | | 1 891 | 578 | 1 453 | | 1 250 |
| 22 | | | 2 016 | 625 | 1 578 | | 1 375 |
| 24 | 484 | 594 | 2 204 | 6875 | 1 703 | 147 | 1 500 |

| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|
| 005 | 13 | 297 | 7 54 | 672 | 17 07 | 1 250 | 31 75 |
| 007 | 18 | 317 | 8 05 | 6875 | 17 46 | 1 266 | 32 16 |
| .008 | .20 | .344 | 8 74 | 754 | 19 15 | 1 328 | 33 73 |
| 010 | 25 | 3595 | 9.13 | 781 | 19.84 | 1 355 | 34 42 |
| 011 | 28 | 403 | 10 24 | 828 | 21 03 | 1 375 | 34 93 |
| 012 | 30 | 406 | 10 31 | 879 | 22 33 | 1 391 | 35 33 |
| 015 | 38 | 438 | 11 13 | 906 | 23 01 | 1 453 | 36 91 |
| 028 | 71 | 453 | 11 51 | 954 | 24 23 | 1 500 | 38 10 |
| 053 | 1 34 | 484 | 12 29 | 980 | 24 89 | 1 516 | 38 51 |
| 058 | 1 47 | 4845 | 12 31 | 1 031 | 26 19 | 1 578 | 40 08 |
| 078 | 1 98 | 515 | 13 08 | 1 047 | 26 59 | 1 641 | 41 68 |
| .116 | 2 95 | 531 | 13 49 | 1 078 | 27.38 | 1 703 | 43 26 |
| 120 | 3 05 | 562 | 14 27 | 1 105 | 28.07 | 1 766 | 44 86 |
| 139 | 3 53 | 578 | 14 68 | 1 141 | 28 98 | 1 891 | 48 03 |
| 147 | 3 73 | 594 | 15 09 | 1 156 | 29 36 | 2 016 | 51.21 |
| 223 | 5 66 | .625 | 15 88 | 1 230 | 31 24 | 2 204 | 55 98 |
| 238 | 6 05 | 629 | 15 98 | 1 234 | 31 34 | | |

NOTES

1 Dimensions are in inches.

2 Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓔ 3 For main keyway and keyway positions, see MIL-C-38999.

4 For design feature purposes this standard takes precedence over documents referenced herein

5 Referenced documents shall be of the issue in effect on date of invitation for bid

6 The gage feature for GG shall be 010 ( 25 mm) smaller than the MMC size at basic location

APPROVED 8 SEP 66 REVISED Ⓓ 13 AUG 74 Ⓔ FOR CHANGES SEE SHEETS 1 & 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document

Reviewer activities Army MI MU
Navy - EC MC OS
Air Force - 11, 15, 17 80
DSA - ES

User activities

| | | | |
|---|---|---|---|
| P A AF-85<br>Other Cust<br>ARMY-EL<br>NAVY-AS | International interest | TITLE<br>CONNECTOR, RECEPTACLE, ELECTRICAL BOX MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES II. | MILITARY STANDARD<br>MS27476 |
| Procurement Specification<br>MIL-C-38999 | | SUPERSEDES | SHEET 2 OF 2 |

DD FORM 1 SEP 63 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.