

FAST AND LOOSE PIN

FED. SUP CLASS
5340

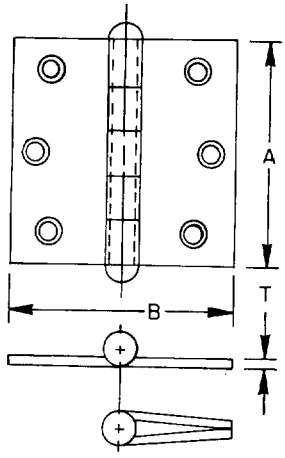

NOT SWAGED,
FOR FULL SURFACE APPLICATION

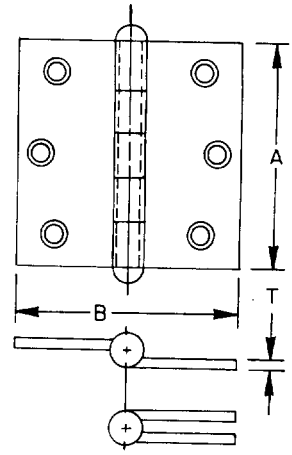

SWAGED,
FOR MORTISE APPLICATION

TABLE I. DASH NUMBERS AND DIMENSIONS.

NOMINAL SIZE	A LENGTH	±.06	2.00	2.50	3.00	3.50	4.00
	B WIDTH	±.06	2.00	2.50	3.00	3.50	4.00
T THICKNESS		±.005	.082	.089	.092	2/ .101 .123	2/ .107 .130
NUMBER OF SCREW HOLES			4	6	6	6	8
1/ SIZE OF SCREWS		(REF)	#7 X 3/4	#8 X 3/4	#8 X 7/8	#9 X 1	#10 X 1
TYPES			DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, NOT SWAGED			2	4	6	8	10
FAST PIN, SWAGED			22	24	26	28	30
LOOSE PIN, NOT SWAGED			12	14	16	18	20
LOOSE PIN, SWAGED			32	34	36	38	40

1/ SEE NOTE 1

2/ SEE NOTE 4

APPROVED 24 FEB 61 REVISED (B) 21 DEC 87

(B) ENTIRE STANDARD REVISED

USER ACTIVITIES:
ARMY – ME

REVIEWER ACTIVITIES:
AIR FORCE – 82
DLA – IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AR Other Cust NAVY – YD AIR FORCE-99		HINGE, BUTT, BROAD, NON-TEMPLATE	MS27968
PROCUREMENT SPECIFICATION ANSI A156.1	SUPERSEDES: SHFX1, SHFX1.1, MQ129A, MQ129C		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1723

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL:


   BODY: STEEL, IN ACCORDANCE WITH ASTM A506 LOW CARBON, COLD ROLLED.

   PIN: BRASS, IN ACCORDANCE WITH QQ-B-626, COMPOSITION 11, HARD OR CORROSION-RESISTANT STEEL, IN ACCORDANCE WITH ASTM A666.

2. PROTECTIVE COATING: CADMIUM PLATED, IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. ZINC COATED IN ACCORDANCE WITH ASTM B633 Fe/Zn13, TYPE II OR MIL-C-81562, TYPE II, CLASS 2.

3. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER TAKEN FROM TABLE I.

   EXAMPLE: MS27968-2

   MS27968-2 - INDICATES HINGE, BUTT, BROAD, NON-TEMPLATE, STEEL, LENGTH, 2.00 WIDTH, 2.00 THICKNESS, .082.

NOTES:

1. SCREWS: HINGES ARE FURNISHED WITH WOOD SCREWS. THE SIZES SPECIFIED ARE THOSE NORMALLY FURNISHED BY THE SUPPLIER.
2. SIZE: THE WIDTH DIMENSION OF NOT SWAGED HINGE WILL BE SLIGHTLY NARROWER THAN SHOWN.
3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
4. ACCEPTABLE THICKNESS FOR LOOSE PIN HINGES.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 24 FEB 61
REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:
ARMY — ME

REVIEWER ACTIVITIES:
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY — AR Other Cust NAVY — YD AIR FORCE-99		HINGE BUTT, BROAD, NON-TEMPLATE	MS27968
PROCUREMENT SPECIFICATION ANSI A156.1	SUPERSEDES: SHFXI, SHFXI.1, MQI29A, MQI29C		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.