
FED. SUPPLY CLASS
5935

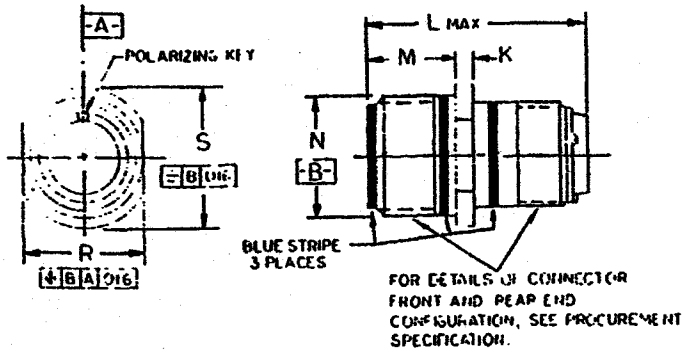

Reviewer activities: Army AT, AV, ME, MI, MU
Navy EC
Air Force 11, 17, 80, 85

User activities: Army
Navy
Air Force

CLASSES L, U & W EVIRONMENT RESISTANT

CLASS K CANCELLED AFTER 9 MARCH 1972
© CLASS U INACTIVE FOR DESIGN AFTER 23 MARCH 1976
USE CLASS L FOR NEW DESIGN

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±.016.
2. Dimensions and tolerancing in accordance with ANSI Y14.5-1973
3. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
4. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
© 7. For insert arrangements see MIL-STD-1651.

APPROVED OCTOBER 18 1971 REVISED © 23 MAR 76

© FOR CHANGES SEE SHEETS 1&2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] procurement.

P.A	International interest	TITLE ©	MILITARY STANDARD
NAVY-AS Other Cust: ARMY-EL AF-85		CONNECTORS, RECEPTACLE, ELECTRICAL, CABLE CONNECTING, REAR RELEASE, CRIMP CONTACT, AN TYPE	MS3451
Procurement Specification MIL-C-5015		SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5935-1990-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	K ±.015	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8, 4 & 0 CONT'S	M +.031 -.000	N +.000 -.062	R	S ±.031
8S	.083	2.031		.562	.532	.504 .496	.729
10S					.656	.629 .621	.854
10SL					.656	.629 .621	.854
12S		2.031		.562	.782	.754 .746	.974
12		2.125		.750	.782	.754 .746	.974
14S		2.031		.562	.906	.879 .871	1.099
14		2.125		.750	.906	.879 .871	1.099
16S		2.031		.562	1.032	1.005 .996	1.224
16	.083	2.125	2.500	.750	1.032	1.005 .996	1.224
18	.125				1.156	1.131 1.121	1.349
20					1.282	1.256 1.246	1.474
22				.750	1.406	1.381 1.371	1.599
24				.812	1.532	1.506 1.496	1.715
28				.812	1.782	1.756 1.746	1.974
32				.875	2.032	2.007 1.996	2.224
36					2.282	2.257 2.246	2.474
40					2.532	2.511 2.496	2.724
44					2.782	2.761 2.746	2.974
48	.125	2.125	2.500	.875	3.032	3.011 2.996	3.224

EXAMPLE OF PART NO: MS3451W 28-2PX

MS 3451 W 28-2 P X

- BASIC PART NO.
- CLASS L, U, W
- MATERIAL DESIGNATOR S-STAINLESS STEEL. LEAVE BLANK FOR ALUMINUM ALLOY, WROUGHT ALUMINUM AND FERROUS ALLOY
- SHELL SIZE
- INSERT ARRANGEMENT
- CONTACT DESIGNATOR
- ALTERNATE INSERT POSITION W, X, Y OR Z. LEAVE BLANK FOR NORMAL POSITION

APPROVED OCTOBER 18 1971 REVISED ©SEE SHEETS 1&2

Reviewer activities: Army AT, AV, ME, MI, MU
Navy EC
Air Force 11, 17, 80, 85

User activities: Army
Navy
Air Force

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] from this document.

P.A
NAVY-AS
Other Cus
ARMY-EL
AF 85
MIL-C 5015

DD FORM 1 SEP 63 672

TITLE ©
CONNECTORS, RECEPTACLE, ELECTRICAL, CABLE CONNECTING, REAR RELEASE, CRIMP CONTACT, AN TYPE

MILITARY STANDARD

MS3451

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.