
FED. SUP CLASS
6640

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

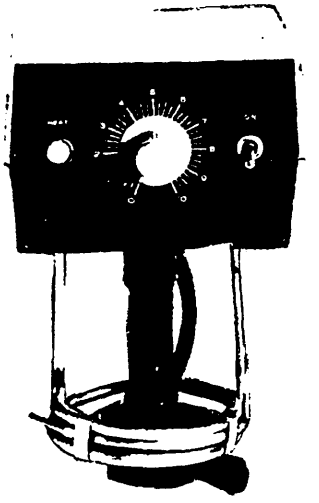

PART NUMBER	TEMPERATURE RANGE °C	TEMPERATURE STABILITY °C	PUMPING CAP., H_2O L (min)	HEATING CAPACITY W (max)
MS36411-1	+20 to +70	±0.03 @ +37	3.5	450
MS36411-2	+15 to +80	±0.02 @ +37	3	750
MS36411-3	-30 to +150	±0.01 @ +37	10	750
MS36411-4	-50 to +200	±0.005 @ +35	13	1000
MS36411-5	-50 to +250	±0.004 @ +35	Suction 8	1000

MATERIAL: All elements in contact with liquid shall be stainless steel in accordance with ASTM Specification A167, or nickel-plated copper. All other components shall be made of materials that will function as required for reliable service.

DESIGN: The circulator shall be capable of being mounted on any suitable container or laboratory stand. The temperature control shall accurately control by direct dialing any desired temperature on a continuously variable basis. All circulators have built-in pumps for temperature regulation. For ranges below ambient temperatures accessory cooling coils must by used.

All circulators shall be supplied with a 2 m 3-wire cord and plug, for 115 volts, 50/60Hz power supply.

All electrical components shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

APPROVED 30 JUN 1983 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		CIRCULATOR, CONSTANT TEMPERATURE	MS36411
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1181

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:40Z
Check the source to verify that this is the current version before use.