
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS 6150

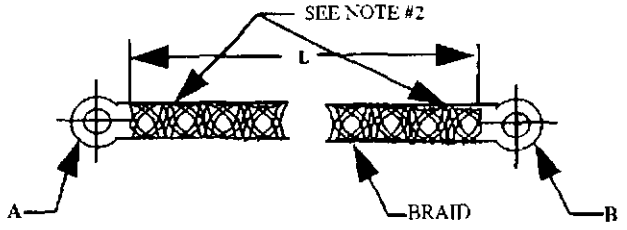

DASH NO.	L	TERMINAL STUD SIZE A	TERMINAL STUD SIZE B	BRAID SIZE
1	4	4	8	11/64
2	4	8	10	1/4
3	4	10	5/16	
4	4	1/4	3/8	
5	4	4	4	11/64
6	4	6	6	
7	4	8	8	1/4
8	4	10	10	
9	4	1/4	1/4	
10	4	5/16	5/16	
11	4	3/8	3/8	
12	6	4	8	11/64
13	6	8	10	1/4
14	6	10	5/16	
15	6	1/4	3/8	
16	6	4	4	11/64
17	6	6	6	
18	6	8	8	1/4
19	6	10	10	
20	6	1/4	1/4	
21	6	5/16	5/16	
22	6	3/8	3/8	
23	8	4	8	11/64
24	8	8	10	1/4
25	8	10	5/16	
26	8	1/4	3/8	
27	8	4	4	11/64
28	8	6	6	
29	8	8	8	1/4
30	8	10	10	
31	8	1/4	1/4	
32	8	5/16	5/16	
33	8	3/8	3/8	
34	10	4	8	11/64
35	10	8	10	1/4
36	10	10	5/16	
37	10	1/4	3/8	
38	10	4	4	11/64
39	10	6	6	
40	10	8	8	1/4
41	10	10	10	
42	10	1/4	1/4	
43	10	5/16	5/16	
44	10	3/8	3/8	
45	12	4	8	11/64
46	12	8	10	1/4
47	12	10	5/16	
48	12	1/4	3/8	
49	12	4	4	11/64
50	12	6	6	
51	12	8	8	1/4
52	12	10	10	
53	12	1/4	1/4	
54	12	5/16	5/16	
55	12	3/8	3/8	
56	14	4	8	11/64
57	14	8	10	1/4
58	14	10	5/16	
59	14	1/4	3/8	
60	14	4	4	11/64
61	14	6	6	
62	14	8	8	1/4
63	14	10	10	
64	14	1/4	1/4	
65	14	5/16	5/16	
66	14	3/8	3/8	

DASH NO.	L	TERMINAL STUD SIZE A	TERMINAL STUD SIZE B	BRAID SIZE
67	16	4	8	11/64
68	16	8	10	1/4
69	16	10	5/16	
70	16	1/4	3/8	
71	16	4	4	11/64
72	16	6	6	
73	16	8	8	1/4
74	16	10	10	
75	16	1/4	1/4	
76	16	5/16	5/16	
77	16	3/8	3/8	
78	18	4	8	11/64
79	18	8	10	1/4
80	18	10	5/16	
81	18	1/4	3/8	
82	18	4	4	11/64
83	18	6	6	
84	18	8	8	1/4
85	18	10	10	
86	18	1/4	1/4	
87	18	5/16	5/16	
88	18	3/8	3/8	
89	20	4	8	11/64
90	20	8	10	1/4
91	20	10	5/16	
92	20	1/4	3/8	
93	20	4	4	11/64
94	20	6	6	
95	20	8	8	1/4
96	20	10	10	
97	20	1/4	1/4	
98	20	5/16	5/16	
99	20	3/8	3/8	
100	25	4	8	11/64
101	25	8	10	1/4
102	25	10	5/16	
103	25	1/4	3/8	
104	25	4	4	11/64
105	25	6	6	
106	25	8	8	1/4
107	25	10	10	
108	25	1/4	1/4	
109	25	5/16	5/16	
110	25	3/8	3/8	
111	30	4	8	11/64
112	30	8	10	1/4
113	30	10	5/16	
114	30	1/4	3/8	
115	30	4	4	11/64
116	30	6	6	
117	30	8	8	1/4
118	30	10	10	
119	30	1/4	1/4	
120	30	5/16	5/16	
121	30	3/8	3/8	
122	35	4	8	11/64
123	35	8	10	1/4
124	35	10	5/16	
125	35	1/4	3/8	
126	35	4	4	11/64
127	35	6	6	
128	35	8	8	1/4
129	35	10	10	
130	35	1/4	1/4	
131	35	5/16	5/16	
132	35	3/8	3/8	

REVISED

APPROVED 15 NOV. 1960

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS 39119 (ORD)
ORD	A- CZ SigC N- AF-	LEAD, ELECTRICAL, BRAIDED WIRE	
PROCUREMENT SPECIFICATION	SUPERSEDES: ABMA DRAWINGS SM108 AND SM109		SHEET 1 of 2

DD FORM 1 OCT 52 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS 6150

DASH NO.	L	TERMINAL STUD A	TERMINAL STUD B	BRAID SIZE
133	40	4	8	11/64
134	40	8	10	1/4
135	40	10	5/16	
136	40	1/4	3/8	
137	40	4	4	11/64
138	40	6	6	1/4
139	40	8	8	
140	40	10	10	
141	40	1/4	1/4	
142	40	5/16	5/16	
143	40	3/8	3/8	
144	45	4	8	11/64
145	45	8	10	1/4
146	45	10	5/16	
147	45	1/4	3/8	
148	45	4	4	11/64
149	45	6	6	1/4
150	45	8	8	
151	45	10	10	
152	45	1/4	1/4	
153	45	5/16	5/16	
154	45	3/8	3/8	
155	50	4	8	11/64
156	50	8	10	1/4
157	50	10	5/16	
158	50	1/4	3/8	
159	50	4	4	11/64
160	50	6	6	1/4
161	50	8	8	
162	50	10	10	
163	50	1/4	1/4	
164	50	5/16	5/16	
165	50	3/8	3/8	
166	55	4	8	11/64
167	55	8	10	1/4
168	55	10	5/16	
169	55	1/4	3/8	
170	55	4	4	11/64
171	55	6	6	1/4
172	55	8	8	
173	55	10	10	
174	55	1/4	1/4	
175	55	5/16	5/16	
176	55	3/8	3/8	
177	60	4	8	11/64
178	60	8	10	1/4
179	60	10	5/16	
180	60	1/4	3/8	
181	60	4	4	11/64
182	60	6	6	1/4
183	60	8	8	
184	60	10	10	
185	60	1/4	1/4	
186	60	5/16	5/16	
187	60	3/8	3/8	

DASH NO.	L	TERMINAL STUD A	TERMINAL STUD B	BRAID SIZE
188	70	4	8	11/64
189	70	8	10	1/4
190	70	10	5/16	
191	70	1/4	3/8	
192	70	4	4	11/64
193	70	6	6	1/4
194	70	8	8	
195	70	10	10	
196	70	1/4	1/4	
197	70	5/16	5/16	
198	70	3/8	3/8	
199	80	4	8	11/64
200	80	8	10	1/4
201	80	10	5/16	
202	80	1/4	3/8	
203	80	4	4	11/64
204	80	6	6	1/4
205	80	8	8	
206	80	10	10	
207	80	1/4	1/4	
208	80	5/16	5/16	
209	80	3/8	3/8	
210	90	4	8	11/64
211	90	8	10	1/4
212	90	10	5/16	
213	90	1/4	3/8	
214	90	4	4	11/64
215	90	6	6	1/4
216	90	8	8	
217	90	10	10	
218	90	1/4	1/4	
219	90	5/16	5/16	
220	90	3/8	3/8	
221	100	4	8	11/64
222	100	8	10	1/4
223	100	10	5/16	
224	100	1/4	3/8	
225	100	4	4	11/64
226	100	6	6	1/4
227	100	8	8	
228	100	10	10	
229	100	1/4	1/4	
230	100	5/16	5/16	
231	100	3/8	3/8	
232	130	4	8	11/64
233	130	8	10	1/4
234	130	10	5/16	
235	130	1/4	3/8	
236	130	4	4	11/64
237	130	6	6	1/4
238	130	8	8	
239	130	10	10	
240	130	1/4	1/4	
241	130	5/16	5/16	
242	130	3/8	3/8	

MATERIAL: BRAID, TUBULAR WIRE PER QQ-B-575 11/64 INCH I.D. 24 CARRIER 168 ENDS 36 GUAGE (0.005 INCH) WIRE 1/4 INCH I.D. 24 CARRIER 384 ENDS 36 GUAGE (0.005 INCH) WIRE TERMINALS PER MS35436

FINISH: PER APPLICABLE PARAGRAPHS OF QQ-B-575 AND MS35436.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, PLUS OR MINUS TOLERANCES SHALL BE IN ADDITIVE INCREMENTS OF 1/16 INCH FOR EACH LENGTH LISTED.
2. SOLDER INBOARD TAB OF TERMINALS ONLY PER SPECIFICATION MIL-S-6872.
3. THE BRAID SHALL PROVIDE A MINIMUM OF 90% COVERAGE WHEN PLACED OVER A MANDREL OF A DIAMETER EQUIVALENT TO THE NOMINAL I.D. OF THE BRAID. THERE SHALL BE NOT MORE THAN AN AVERAGE OF ONE SPLICE OR COMPLETE BREAK IN ANY CARRIER IN EACH 35 FT. OF BRAID, AND NOT MORE THAN ONE BROKEN OR SPLICED WIRE IN EACH 15 FT. OF BRAID.
4. THE PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

APPROVED 15 NOV. 1960 REVISED

CUSTODIANS ORD	OTHER INT. A- CZ SigC N- AF-	MILITARY STANDARD	MS 39119 (ORD)
		LEAD, ELECTRICAL, BRAIDED WIRE	
PROCUREMENT SPECIFICATION		SUPERSEDES: ABMA DRAWINGS SM108 AND SM109	SHEET 2 of 2

DD FORM 1 OCT 52 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.