FED SUP CLASS
5305

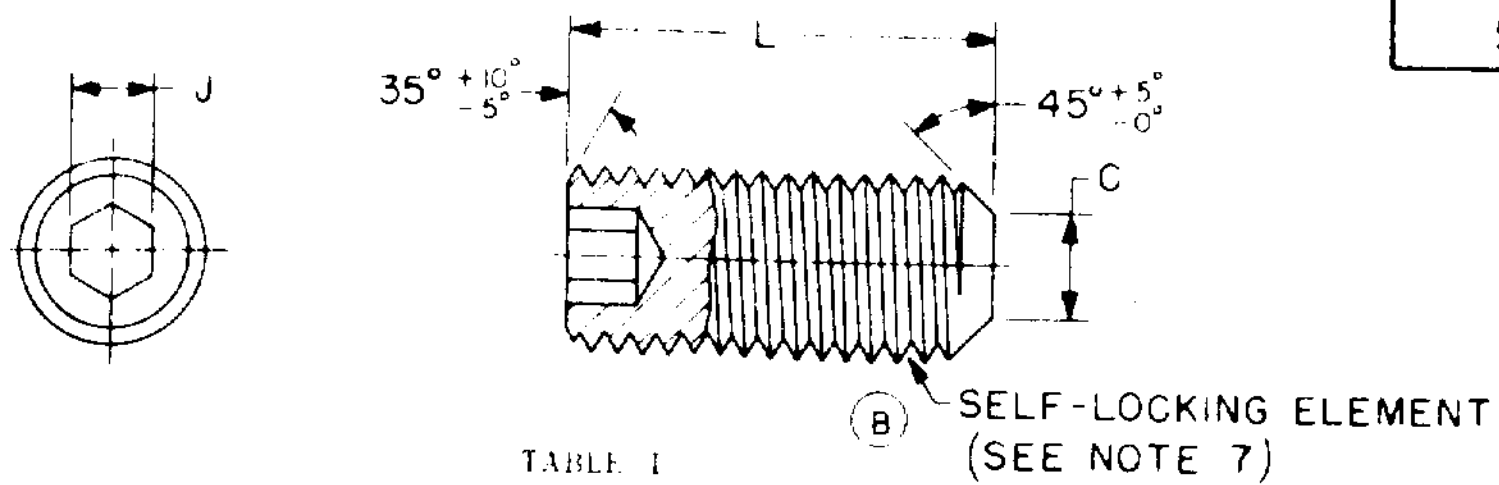

TABLE I

NOMINAL SIZE		.060	.086	.112	.138	.164	.190	.250	.3125	.375	.500
THREADS PER INCH (UNF-3A)		80	64	48	40	36	32	28	24	24	20
J SOCKET WIDTH ACROSS FLATS	NOM	.028	.035	.050	.062	.078	.094	.125	.156	.188	.250
C POINT DIAMETER	MAX	.033	.047	.061	.074	.087	.102	.132	.172	.212	.291
	MIN	.027	.039	.051	.064	.076	.088	.118	.156	.194	.270

L LENGTH	TOL	DASH NUMBER														
		PLAIN	PLAIN	PLAIN	PLAIN	PLAIN	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK	PLAIN	SELF LOCK
.062	±.010	1*	7*	15*	23*											
.125			8*	16*	24*	33*		101*								
.188			9*	17*	25*	34*	46*	102		112						
.250					26*	35*	47*	103	58*	113	69*	125				
.312					27*	36*	48*	104	59*	114	70*	126	80*			
.375						37*	49*	105	60*	115	71*	127	81*	137	90*	147
.438								106*		116*						
.500						38*	50*	107	61*	117	72*	128	82*	138	91*	148
.562								108*		118*						
.625						39*	51*	109	62*	119	73*	129	83*	139	92*	149
.750	±.020					40*	52*	110	63*	120	74*	130	84*	140	93*	150
.875										121		131		141		151
1.000								111		122		132		142		152
1.250										123		133		143		153
1.500										124		134		144		154
1.750												135		145		155
2.000												136		146		156
2.500	±.031															157
3.000																158

* Inactive for new design after 29 DEC 1972. (B)

(B) For changes see sheets 1 and 2.

APPROVED 7 MAY 1958 REVISED (A) 29 JAN 1964 (B) 29 DEC 1972

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER: AV, IS, MI, MU
SER: AT, GL, MC, ME, OS, SH, YD

P.A. WC Other Cust 82	TITLE SETSCREW-HEXAGON SOCKET, FLAT POINT, CORROSION-RESISTING STEEL, PASSIVATED, UNF-3A, PLAIN AND SELF-LOCKING (B)	**MILITARY STANDARD** **MS51031**
PROCUREMENT SPECIFICATION FF-S-200	**SUPERSEDES** MS51032, MS51056, MS51057 and in part MS18066, HCTX2.13, BCTX1, BCTX3 and BCTX4.5	**SHEET** 1 **OF** 2

DD FORM 1 SEP 67 **672-1** *(Coordinated)*

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:55Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

NOTES:

1. MATERIAL: Corrosion-Resisting Steel, 300 series, in accordance with procurement specification.
2. PROTECTIVE COATING: Passivated in accordance with QQ-P-35.
3. THREADS: The threads shall be in accordance with MIL-S-7742.
4. MAGNETIC PERMEABILITY: These setscrews have a magnetic permeability of 2.0 max (Air = 1.0) for a field strength of H = 200 oersteds, when using a magnetic indicator per MIL-I-17214.
5. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51031-102.
7. SELF-LOCKING ELEMENT:
   (a) The self-locking element shall be in accordance with MIL-F-18240.
   Ⓑ (b) For design and usage limitations, see MS15981.
   (c) Location of effective locking area shall be in accordance with MS15981.
   (d) Maximum ring gage diameter that locking region of setscrew must pass thru freely or with finger pressure shall be the nominal size plus 0.010.
   (e) MIL-F-18240 doesn't establish a torque requirement for lengths above the dashed line. Only a positive indication of torque is required.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: AV, IS, MI, MU [illegible] AT, CL, MO, ME, [illegible], AP

INTERCHANGEABILITY

Screws covered by the dash numbers given in MS51032 are cancelled after 29 January 1964 and superseded by the screws covered on MS51031 having the same dash numbers. Cancelled screws may be used until existing stocks are depleted. Use only MS51031 screws for new design.

Effective 31 December 1963, MS51056 and MS51057 were cancelled and superseded by MS51031 and MS51032 respectively.

Screws covered by the dash numbers given in MS18066 in part are cancelled. Cancelled screws may be used until existing stocks are depleted. Use only the superseding screws for new design. Replacement shall be in accordance with Table II.

TABLE II Ⓑ

CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING	CANCELLED	SUPERSEDING
MS18066	MS51031	MS18066	MS51031	MS18066	MS51031	MS18066	MS51031
DASH NUMBER		DASH NUMBER		DASH NUMBER		DASH NUMBER	
4	101	32	116	64	131	82	145
8	102	17	117	70	132	85	146
13	103	45	118	74	133	92	147
19	104	50	119	78	134	40	148
25	105	7	120	81	135	53	149
33	106	63	121	84	136	60	150
36	107	69	122	91	137	66	151
44	108	73	123	39	138	72	152
49	109	77	124	52	139	76	153
56	110	15	125	59	140	80	154
68	111	21	126	65	141	83	155
9	112	27	127	71	142	86	156
14	113	38	128	75	143	87	157
20	114	51	129	79	144	88	158
26	115	58	130				

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for new design and design applications and for repetitive use shall be made from this document.

APPROVED 7 MAY 1958 REVISED Ⓐ 29 JAN 1964 Ⓑ FOR CHANGES SEE SHEETS 1 AND 2

P.A. WC **Other Cust** 82	**TITLE** SETSCREW-HEXAGON SOCKET, FLAT POINT, CORROSION-RESISTING STEEL, PASSIVATED, UNF-3A, PLAIN AND SELF-LOCKING Ⓑ	**MILITARY STANDARD** **MS51031**
PROCUREMENT SPECIFICATION FF-S-200	**SUPERSEDES** MS51032, MS51056, MS51057 and in part MS18066, BCTX2.13, BCUX1, BCUX3 and BCUX4.5.	**SHEET** 2 **OF** 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:55Z
Check the source to verify that this is the current version before use.