


FED. SUP CLASS
2330

USER ACTIVITIES:

REVIEWER ACTIVITIES:

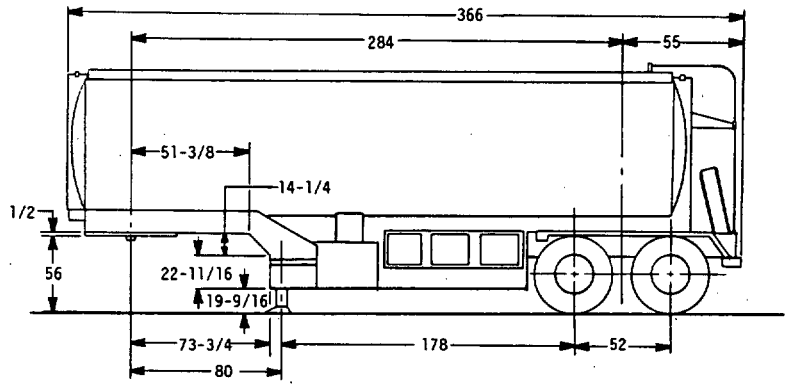





APPROVED 26 AUG 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, UNDER/OVERWING, M970A1.	MILITARY STANDARD MS52218(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5 TON, 6 X 6 M818 SERIES

CURBWEIGHT: W/O PAYLOAD 16,810 LBS

PAYLOAD: (FUEL @ 6.79 LBS/GAL) LOADED
3,800 GALLONS
25,800 LBS

GROSSWEIGHT: W/PAYLOAD 42,610 LBS

GROSSWEIGHT OF TRACTOR (M818):
SEMITRAILER, W/O PAYLOAD 36,830 LBS
SEMITRAILER W/PAYLOAD 71,590 LBS

WEIGHT DISTRIBUTION:
(SEMITRAILER W/M818) W/O PAYLOAD
FRONT AXLE, TRACTOR M818 10,170 LBS
REAR BOGIE, TRACTOR M818 15,170 LBS
KINGPIN, SEMITRAILER 5,320 LBS
REAR BOGIE, SEMITRAILER 11,490 LBS
(W/5000 GAL PAYLOAD)
FRONT AXLE, TRACTOR M818 10,440 LBS
REAR BOGIE, TRACTOR M818 30,120 LBS
KINGPIN, SEMITRAILER 20,180 LBS
REAR BOGIE, SEMITRAILER 29,220 LBS

CENTER OF GRAVITY:	VERTICAL	HORIZONTAL FROM KINGPIN
EMPTY	40	211
LOADED	64	187-1/2

DEPARTURE ANGLE: 60°

FORDING DEPTH: 24

MILITARY VEHICLE CLASSIFICATION:

	EMPTY	LOADED	HIGHWAY
M818 & M970A1	15	26	30
M970A1	7	19	22

SHIPPING DATA:
CUBIC FEET 2200
SQUARE FEET 250

TIRES: SIZE 11.00 X 20-12 PLY, TREAD NDCC, QTY 8 + 1 SPARE EQUIPPED WITH TUBES, INFLATION PRESSURE 75 PSI

ENGINE: TYPE; (ONAN) 4 CYLINDER, 4 CYCLE, DIESEL, AIR COOLED, HORSEPOWER 27.5
BORE 3.25, STROKE 3.625
LUBE CAPACITY 7 QTS

ELECTRICAL SYSTEM: ENGINE, 12V DIRECT CURRENT 65 AMP ALTERNATOR, 2 12V BATTERIES CONNECTED IN PARALLEL; VEHICLE, 24 VOLTS

BRAKES: SERVICE; QTY 4 SETS, ACTUATION "S" TYPE CAM, PRESSURE 75 TO 95 PSI

DESCRIPTION: THE M970A1 IS A 5000 GALLON FUEL DISPENSING SEMITRAILER DESIGNED FOR UNDER/OVERWING REFUELING OF AIRCRAFT. THE M970A1 HAS A 3 IN CENTRIFUGAL PUMP, FILTER/SEPARATOR, RECIRCULATION SYSTEM AND TWO REFUELING SYSTEMS, ONE EACH FOR UNDERWING AND OVERWING SERVICING. THE UNDERWING REFUELING SYSTEM INCLUDES 50 FEET OF 2-1/2 IN HOSE, ELECTRIC REWIND HOSE REEL, SINGLE POINT DISPENSING NOZZLE, BREAK-AWAY FITTING ON THE HOSE REEL AND DEADMAN CONTROL. THE OVERWING REFUELING SYSTEM INCLUDES 50 FEET OF 1-1/2 IN DISPENSING HOSE, OVERWING DISPENSING NOZZLE AND HOSE REEL WITH ELECTRIC REWIND. A SMALL CLOSED-CIRCUIT DISPENSING NOZZLE (INTERCHANGEABLE WITH THE OVERWING NOZZLE) IS ALSO PROVIDED FOR UNDERWING (HELICOPTER) REFUELING. THE TRAILER HAS A STAINLESS STEEL, SINGLE COMPARTMENT TANK OF 5000 GALLON CAPACITY, PLUS 3% CAPACITY FOR PRODUCT EXPANSION. THE CHASSIS IS OF WELDED STEEL CONSTRUCTION AND EQUIPPED WITH TANDEM OVERSLUNG AXLES (CAPACITY 25,000 LBS) AND MANUALLY OPERATED LANDING GEAR. THE M970A1 IS EQUIPPED WITH A NEW FUEL DISPENSING NOZZLE, HOSE TROUGH COVER, CONTROL PANEL COVER, REAR LADDER, FRONT AND REAR DRAIN, TACHOMETER AND LEAD ASSEMBLY. A VAPOR RECOVERY SYSTEM, REQUIRED IN CERTAIN AREAS, CAN BE INSTALLED ON THE M970A1.

LANDING GEAR: VERTICAL SUPPORT W/FOOT PADS, CRANK OPERATED

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 AUG 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, UNDER/OVERWING, M970A1.	MILITARY STANDARD MS52218(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.