
FED. SUP CLASS
2320

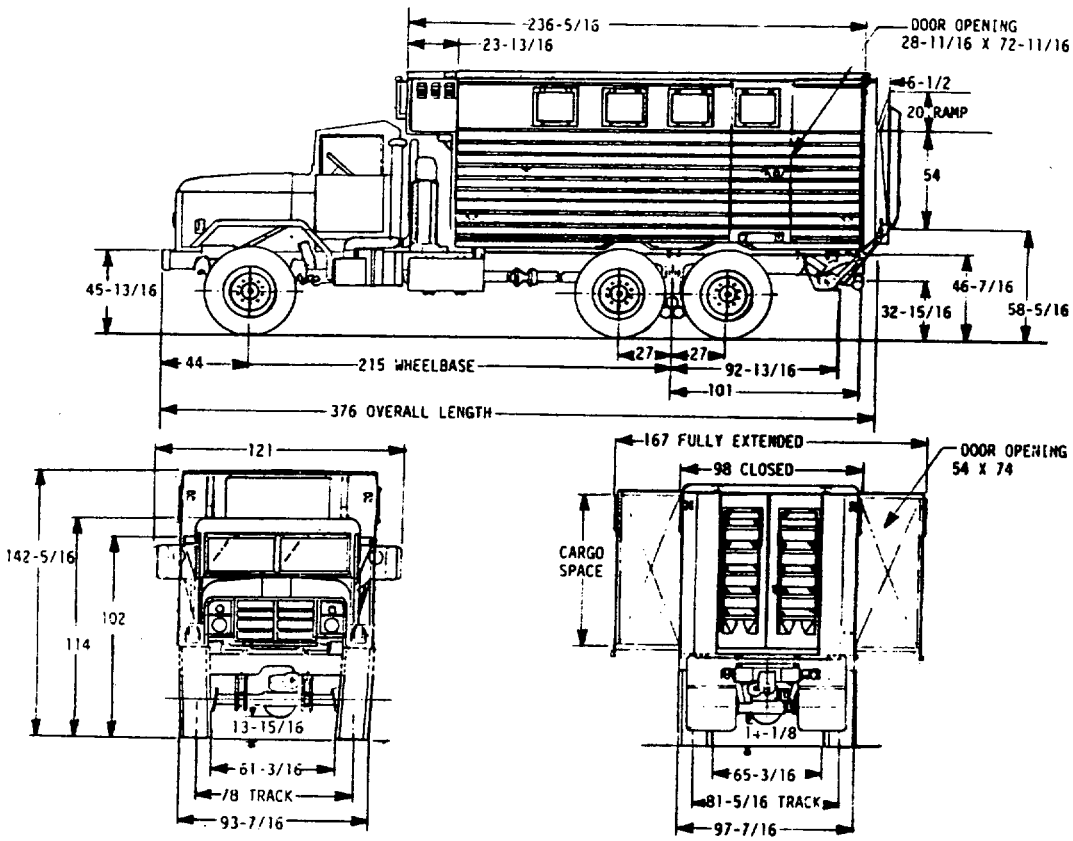

MS PART NO.	ENGINEERING DWG NO.	
MS52235-1	8750162	LESS WINCH

APPROVED 4 OCT 85 REVISED

P. A. ARMY-AT Other Cost	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		TRUCK: VAN EXPANSIBLE, 5 TON, 6x6, M935A1	MS52235(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CHASSIS MODEL:	M944A1
BRIDGE CLASSIFICATION (SHORT TONS): WO/W	
EMPTY	12
WITH PAYLOAD	15
CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW:	
FRONT	10,240 LBS
REAR BOGIE	21,040 LBS
TOTAL	31,250 LBS
PAYLOAD:	5,000 LBS
GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW:	
FRONT	10,460 LBS
REAR BOGIE	25,820 LBS
TOTAL	36,280 LBS
(*ADD 600 LBS FOR 3-MAN CREW W/EQUIPMENT)	
TOWED LOAD ALLOWANCE:	15,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	1,500 LBS
SHIPPING DIMENSIONS:	
CUBIC FEET	3,030
SQUARE FEET	256
LENGTH:	376
WIDTH: (EXCLUDING MIRRORS)	98
HEIGHT:	
OVERALL	142-1/8
WITH MACHINE GUN RING MOUNT	N/A
REDUCIBLE TO LOWEST OPERABLE	142-1/8

CENTER OF GRAVITY: (AT CURB WEIGHT)	
ABOVE GROUND	59-13/16
REAR OF CENTERLINE OF FRONT AXLE	144-5/8
CENTER OF GRAVITY: (W/PAYLOAD)	
ABOVE GROUND	N/A
REAR OF CENTERLINE OF FRONT AXLE	153
PERFORMANCE:	
AT GROSS WEIGHT W/O TOWED LOAD	
MAXIMUM SPEED	63 MPH
MAXIMUM GRADE	60 %
CRUISING RANGE	350 MILES
AT GROSS WEIGHT W/TOWED LOAD	
MAXIMUM SPEED	63 MPH
MAXIMUM GRADE	60 %
CRUISING RANGE	300 MILES
BODY: EXPANSIBLE VAN W/WINDOWS, AND HYDRAULIC LIFTGATE CAP. 3,000 LBS. VAN HEATED BY ONE 60,000 BTU HOT AIR HEATER 10921727 LOCATED ON LEFT SIDE OF AIR CONDITIONER IN VAN BONNET AND PROVISION FOR ONE ELECTRIC HEATER ON RIGHT SIDE. AIR CONDITIONER IS A HORIZONTAL COMPACT LIGHT WEIGHT 36,000 BTU/HR, 208V, AC, 3-PHASE POWER UNIT.	12256556-2 13216E6310
ON-VEHICLE EQUIPMENT: (OVE)	
BASIC ISSUE ITEMS	12300877
ADDITIONAL AUTHORIZATION LIST ITEMS	12300998
ACCESSORY SUPPLEMENTAL KITS:	12302863

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 4 OCT 85 REVISED

MS PART NO.	ENGINEERING DWG NO.	
MS52235-1	8750162	LESS WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK: VAN EXPANSIBLE, 5 TON, 6x6, M935A1	MILITARY STANDARD MS52235(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.